

Widely Tunable Multiband Reconfigurable Patch Antenna for Wireless Applications

H. F. AbuTarboush¹, R. Nilavalan¹, K. M. Nasr², H. S. Al-Raweshidy¹ and D. Budimir³

¹Wireless Network & Communication Centre, School of Engineering & Design, Brunel University, West London, UB8 3PH.UK

²Wireless Communication Technologies, National Physical Laboratory (NPL), Teddington, TW11 0LW, UK

³Wireless Communications Research Group, Department of Electronics & Computer Science, Westminster University, UK

Hattan.AbuTarboush@brunel.ac.uk

Abstract— A design of a low profile reconfigurable microstrip patch antenna is presented. The antenna consists of four sub-patches connected to one feed line, each sub-patch generates a single band. By placing a variable capacitor at the input of the sub-patches, the impedance matching frequency of the antenna can be tuned over a wide range starting from 0.92 GHz to 2.98 GHz with total tunability rang of 2060 MHz. The proposed antenna designed to operate in the Global System for Mobile communication (GSM900, 880-960 MHz)/ Digital Communication System (DCS1800, 1710-1880 MHz)/ Universal Mobile Telecommunication System (UMTS, 1920-2170 MHz)/ Wireless Local Area Network (WLAN, 2400-2483.5 MHz)/ and Worldwide Interoperability for Microwave Access (WiMAX, 2495-2700 MHz). The total size of the proposed antenna is 50 x 50 mm² which is suitable for small wireless devices.

Index Terms— Reconfigurable Antenna, Multiband Antenna, Tunable Antenna, Small Antenna, wide tunability range

different operating bands so the physical size of the multiband antenna can be reduced, to allow the operating frequencies to be reconfigurable, switching component must be used. Varactor and PIN diodes are the most commonly used to tune the operating frequencies in RF and front-end application [4]-[5]. In [6] PIN diodes were used to switch single band. In [7] a dual band with wide tuning range has been achieved by introducing varactor diodes to a chassis antenna. In [8] a wide tuning range is also achieved by using varactor diodes in a large ground plane to cover the frequencies between 1.3 GHz to 2.670 GHz.

The design presented in this paper aims to combat the high profile and large size usually occur when designing antennas for low frequencies. The antenna occupies a total size of 50 x 50 x 1.57 mm = 2590.5 mm³ including the ground plane. The antenna can be used in different wireless applications.

I. INTRODUCTION

Antennas for wireless application are currently requires operation in a number of bands. Antennas are the most important components of any communication systems. Sometimes their inability to adjust to new operating frequency can limit system performance. Therefore, by making antennas able to reconfigure its operation and can adapt with changing system requirements or environmental conditions can improve these restrictions and provide additional levels of functionality. There are different techniques investigated by researchers to reach multiband operations. These includes, applying different shaped-slots to create multiband and wideband [1]-[3].

A reconfigurable antenna can reuse its entire volume at

II. CONFIGURATION AND DESIGN PROCEDURE

Fig.1 shows the structure of the proposed reconfigurable antenna. The main dimensions are listed in Table I. The antenna consists of 4 sub-patches with varactor diode at the input of each sub-patch, feed line, ground plane, 10 pF chip capacitor and 1K ohm current limitation. The antenna is designed on a 1.57 mm-thick FR-4 substrate with a dielectric constant of 4.4. The varactor diode of the BB184 from Philips was used; the capacitance of the diode can be changed from 2 pF (10V) to 14 pF (1V). The operating frequencies can be tuned over a wide range.

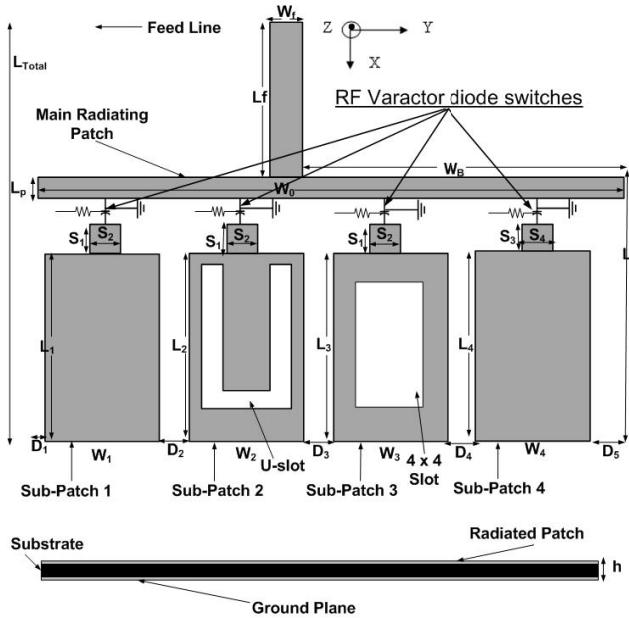


Fig. 1 The structure of the proposed antenna

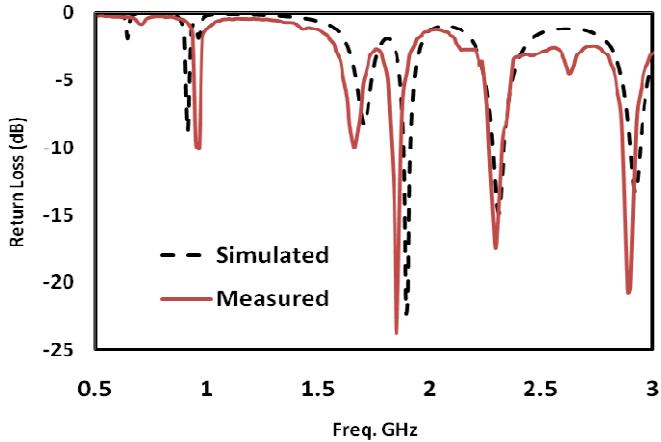


Fig. 2 (a) The measured (solid) and simulated (dashed) return loss (S_{11}) when the antenna is not biased (i.e. $V=0$).

III. SIMULATED EXPERIMENTAL RESULTS

The antenna was simulated using HFSS software. In the simulation model, the capacitance was changed from 2 pF to 14 pF while the return loss was obtained from each value. Fig.2 shows the return loss (S_{11}) when the antenna is not biased. Fig.3 shows the measured S_{11} when applying equal voltages to the switches. By applying equal voltages to the four switches the frequency of the 0.92 GHz, 1.7 GHz, 1.95 GHz 2.4 GHz and 2.9 GHz can be tuned over wide range. The characteristics of the simulated results can be verified by fabricating the antenna and measure its performance. The antenna was fabricated on a PCB, the thickness of the

TABLE I
THE DIMENSIONS OF THE PROPOSED ANTENNA (UNITS IN MM)

| L_o | L_I | L_2 | L_3 | L_4 | L_f | L_P |
|-------|-------|-------------|-------|--------------|-------|-------|
| 33 | 24 | 24 | 24 | 24 | 12.5 | 5 |
| W_o | W_I | W_2 | W_3 | W_4 | W_f | W_B |
| 50 | 8 | 10 | 10 | 12 | 3 | 27 |
| S_I | S_3 | S_2 | S_4 | D_I | D_2 | D_3 |
| 3 | 3 | 2 | 2.5 | 1 | 2 | 2 |
| D_4 | D_5 | L_{Total} | h | Ground Plane | | |
| 3 | 2 | 45.5 | 1.57 | 50 x 50 | | |

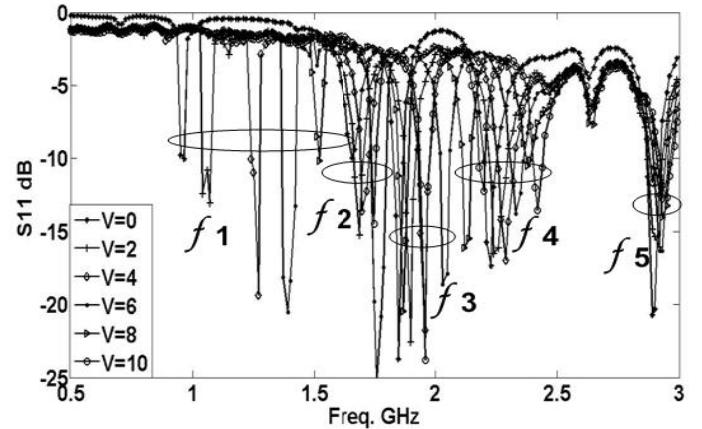


Fig. 3 The measured return loss S_{11} when applying equal voltages to the four switches

substrate is 1.57 mm, the dielectric substrate is FR-4 with a relative permittivity $\epsilon_r = 4.4$. The measured and simulated results are in good agreements.

The measurements for the radiation patterns were conducted at the Small Antenna Radiated Testing Range (SMART) at the National Physical Laboratory (NPL). After measuring the co and cross polar, the results were normalized to the maximum value. The normalized measured and simulated radiation patterns for the co- and cross polar far field E-plane and H-plane at 0.92, 1.70, 1.95, 2.4 and 2.9 GHz are shown in Fig. 4(a)-(e) respectively.

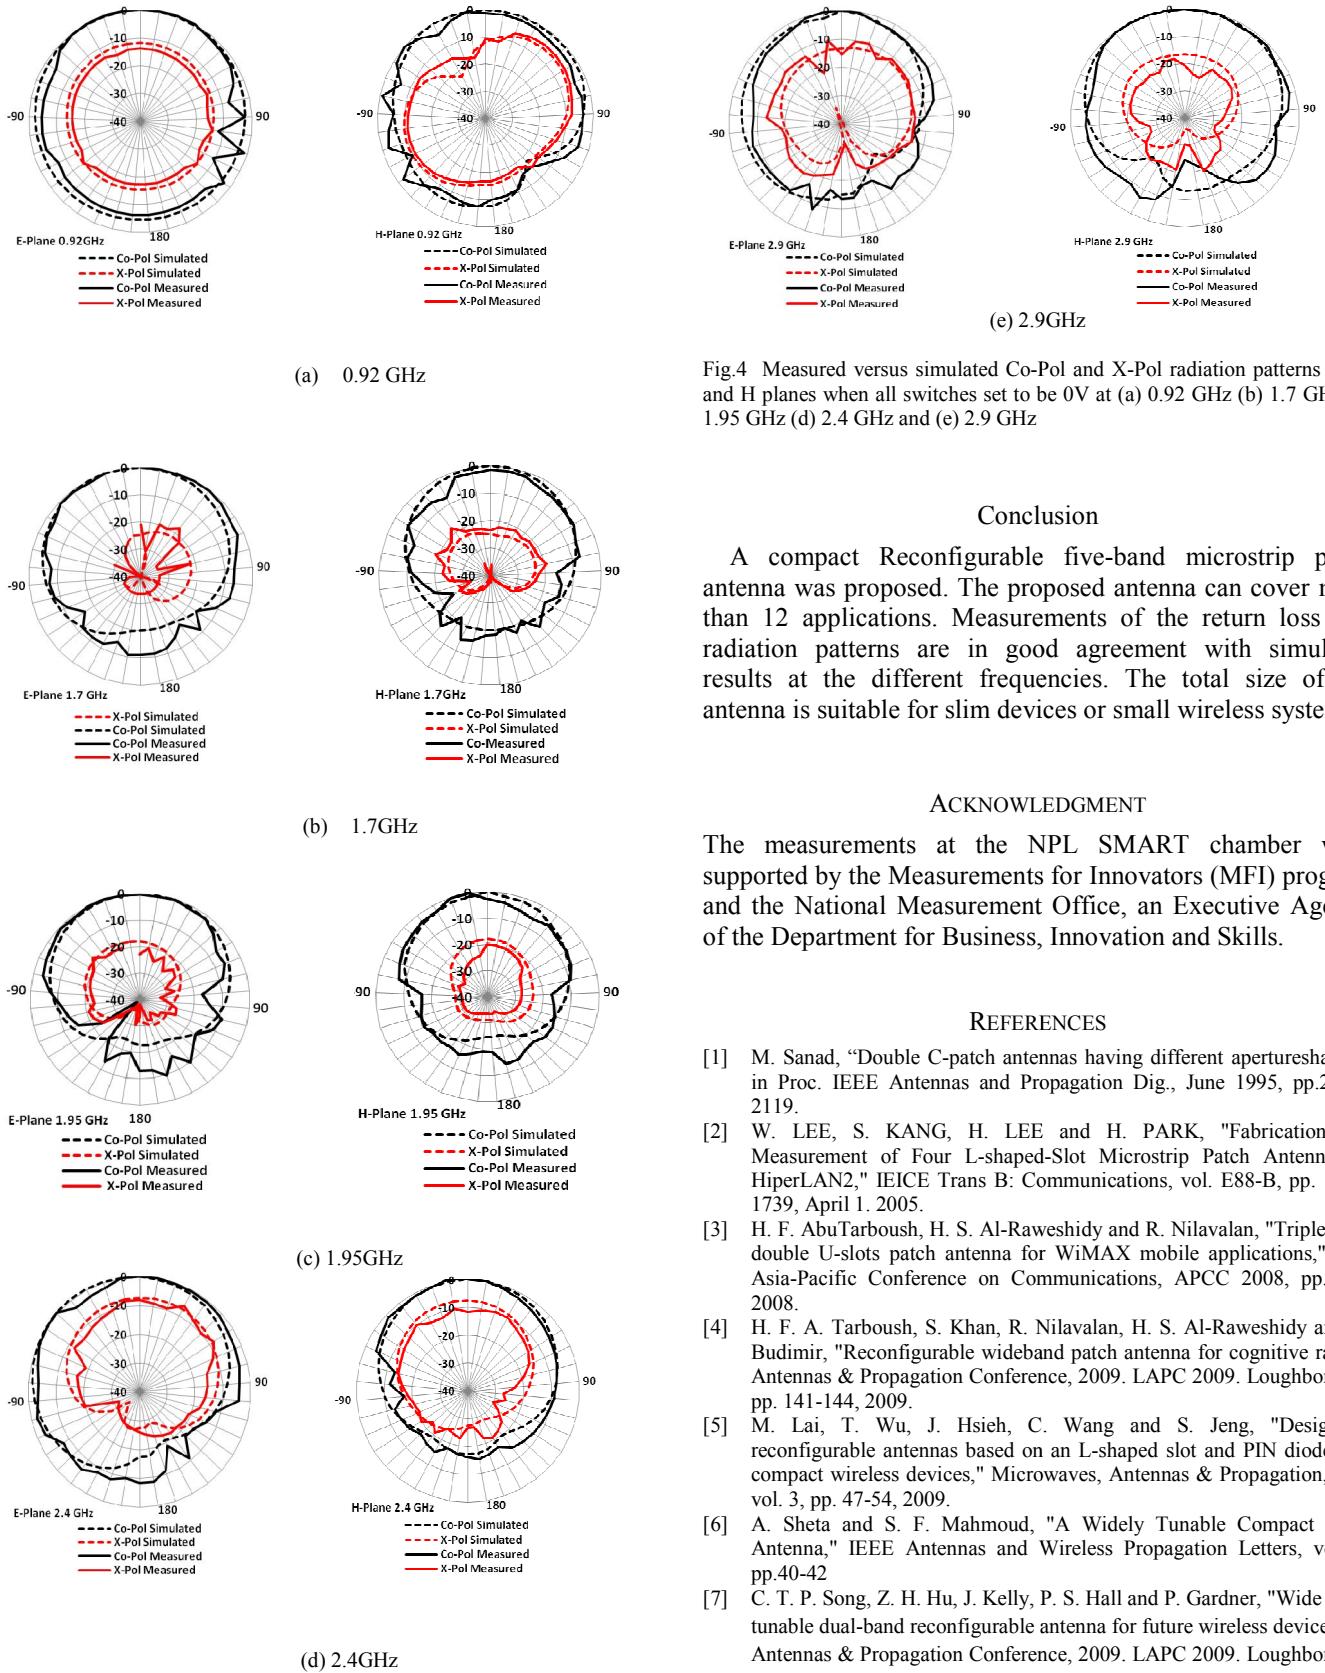


Fig.4 Measured versus simulated Co-Pol and X-Pol radiation patterns for E and H planes when all switches set to be 0V at (a) 0.92 GHz (b) 1.7 GHz (c) 1.95 GHz (d) 2.4 GHz and (e) 2.9 GHz

Conclusion

A compact Reconfigurable five-band microstrip patch antenna was proposed. The proposed antenna can cover more than 12 applications. Measurements of the return loss and radiation patterns are in good agreement with simulated results at the different frequencies. The total size of the antenna is suitable for slim devices or small wireless system.

ACKNOWLEDGMENT

The measurements at the NPL SMART chamber were supported by the Measurements for Innovators (MFI) program and the National Measurement Office, an Executive Agency of the Department for Business, Innovation and Skills.

REFERENCES

- [1] M. Sanad, "Double C-patch antennas having different apertureshapes," in Proc. IEEE Antennas and Propagation Dig., June 1995, pp.2116–2119.
- [2] W. LEE, S. KANG, H. LEE and H. PARK, "Fabrication and Measurement of Four L-shaped-Slot Microstrip Patch Antenna for HiperLAN2," IEICE Trans B: Communications, vol. E88-B, pp. 1735-1739, April 1. 2005.
- [3] H. F. AbuTurboush, H. S. Al-Raweshidy and R. Nilavalan, "Triple band double U-slots patch antenna for WiMAX mobile applications," 14th Asia-Pacific Conference on Communications, APCC 2008, pp. 1-3, 2008.
- [4] H. F. A. Tarboush, S. Khan, R. Nilavalan, H. S. Al-Raweshidy and D. Budimir, "Reconfigurable wideband patch antenna for cognitive radio," Antennas & Propagation Conference, 2009. LAPC 2009. Loughborough, pp. 141-144, 2009.
- [5] M. Lai, T. Wu, J. Hsieh, C. Wang and S. Jeng, "Design of reconfigurable antennas based on an L-shaped slot and PIN diodes for compact wireless devices," Microwaves, Antennas & Propagation, IET, vol. 3, pp. 47-54, 2009.
- [6] A. Sheta and S. F. Mahmoud, "A Widely Tunable Compact Patch Antenna," IEEE Antennas and Wireless Propagation Letters, vol. 7, pp.40-42
- [7] C. T. P. Song, Z. H. Hu, J. Kelly, P. S. Hall and P. Gardner, "Wide tunable dual-band reconfigurable antenna for future wireless devices," Antennas & Propagation Conference, 2009. LAPC 2009. Loughborough, pp. 601-604, 2009.
- [8] N. Behdad, and K. Sarabandi, "Dual-band reconfigurable antenna with a very wide tunability range", IEEE Trans. Antennas and Propag., vol.54, pp. 409-416, Feb. 2006.