

Key performance indicators for successful simulation projects

Mohsen Jahangirian, Simon J E Taylor, Terry Young & Stewart Robinson

To cite this article: Mohsen Jahangirian, Simon J E Taylor, Terry Young & Stewart Robinson (2017) Key performance indicators for successful simulation projects, Journal of the Operational Research Society, 68:7, 747-765, DOI: [10.1057/jors.2016.1](https://doi.org/10.1057/jors.2016.1)

To link to this article: <https://doi.org/10.1057/jors.2016.1>



Copyright © 2017, The Operational Research Society



Published online: 21 Dec 2017.



Submit your article to this journal [↗](#)



Article views: 1683



View Crossmark data [↗](#)



Citing articles: 2 View citing articles [↗](#)



Open

Key performance indicators for successful simulation projects

Mohsen Jahangirian¹, Simon JE Taylor^{1*}, Terry Young¹ and Stewart Robinson²

¹Brunel University, Uxbridge, UK; and ²Loughborough University, Loughborough, UK

There are many factors that may contribute to the successful delivery of a simulation project. To provide a structured approach to assessing the impact various factors have on project success, we propose a top-down framework whereby 15 Key Performance Indicators (KPI) are developed that represent the level of successfulness of simulation projects from various perspectives. They are linked to a set of Critical Success Factors (CSF) as reported in the simulation literature. A single measure called *Project's Success Measure (PSM)*, which represents the project's total success level, is proposed. The framework is tested against 9 simulation exemplar cases in healthcare and this provides support for its reliability. The results suggest that *responsiveness to the customer's needs and expectations*, when compared with other factors, holds the strongest association with the overall success of simulation projects. The findings highlight some patterns about the significance of individual CSFs, and how the KPIs are used to identify problem areas in simulation projects.

Journal of the Operational Research Society (2017) **68**(7), 747–765. doi:10.1057/jors.2016.1; published online 6 July 2016

Keywords: simulation; critical success factor; key performance indicator; health service

The online version of this article is available Open Access

1. Introduction

The study of simulation projects leads to the question of what project *success* and *failure* mean. The notion of project success or failure, however, is a multi-faceted and multi-perspective topic. For instance, the perception of project success may differ from one stakeholder to another, mainly simulation *customers* and *providers*. Any combination of success and failure experiences might occur in one single project for these two major stakeholders, while obviously the ideal situation is a success from both parties' perspectives. Success must also be seen from a time-based perspective. In the short-term it may appear that few benefits accrue from a specific project, but in the longer-term the full impact of a project may be much greater.

Critical Success Factors (CSFs) represent those areas of an organisation or a project that are vital to its success. Thus, the management needs to focus on these areas in order to create high levels of performance (McIvor *et al*, 2010). The CSF method has proved valuable for linking qualitative and quantitative aspects of processes and organisations. While the CSF methodology was originally introduced with organisational perspectives in mind, its application in the context of projects is not new or uninformed (eg, see Belassi and Tukel, 1996 and Cooke-Davis, 2002).

Computer simulation projects, which are categorised as a service type project, have been carried out in many sectors

in order to improve the performance of systems in general. Their level of success, however, has been in question.

The use of CSF as a key component of a wider framework that takes a multi-faceted and multi-perspective approach to develop quantitative performance indicators for simulation projects could be explored. This paper aims to fulfil this objective. The contribution of this work is the identification of a set of CSFs and associated Key Performance Indicators (KPIs) for simulation projects. This in turn leads to the development of an instrument for measuring and predicting simulation project success.

The paper is organised as follows. The next section provides the background literature for this paper. We present our framework and its underlying concepts and methods in Section 3. Section 4 outlines 9 exemplar cases in healthcare that were used to test our proposed framework. Section 5 presents the results of a survey on the 9 exemplar cases on the basis of the proposed framework. In section 6, the survey results are analysed. The findings of our study are discussed in Section 7 mainly from two perspectives, namely the reliability of our framework and any meaningful patterns observed in the results. Finally, Section 8 brings the paper to a close by outlining the main contributions of the research, limitations, as well as some directions for further studies.

2. Previous work

The study of challenges, success and failure factors in a simulation project has received much attention from researchers

*Correspondence: Simon JE Taylor, Brunel University, Department of Information Systems and Computing, Kingston Lane, Uxbridge UB8 3PH, UK.

and practitioners who have reported their findings in the literature. Melão and Pidd (2003), Murphy and Perera (2002), McHaney *et al* (2002), Robinson and Pidd (1998), Robinson and Bhatia (1995) and Robinson (1994) are some examples with no particular emphasis on the sector orientation. Similarly, some others have looked at the subject but within a specific sector. For example, Van Lent *et al* (2012), Jahangirian *et al* (2012), Brailsford and Vissers (2011), Eldabi (2009), Brailsford *et al* (2009), Brailsford (2007), Brailsford (2005), Harper and Pitt (2004) and Lowery *et al* (1994) have investigated the implementation challenges of simulation projects in the health-care setting.

Similar studies have been carried out in other contexts, such as the construction industry (eg, Chan *et al*, 2004; Al-Tmeemy *et al*, 2011) and the information systems domain (eg Reel, 1999; Agarwal and Rathod, 2006 and Chow and Cao, 2008). The position of the topic ‘project success in non-simulation projects’ has gone even further to the stage that frameworks have been proposed to measure the success, mostly using KPIs. Examples are Luu *et al* (2008), Lam *et al* (2007), Cheung *et al* (2004) and Chan and Chan (2004) in the context of construction projects. This topic has been so important that an industry KPI standard was set out in 2000 by collaboration between the UK government and the construction industry (Raynsford, 2000), on the basis of which annual reports are being produced. The standard has played as a key component of the construction organisations’ move towards achieving best practice.

The difference between types of projects, however, undermines the transferability. The nature of projects is influential when studying the success factors. For example, while health and safety factors could be critical in construction projects, these factors might be of much less importance in others such as computer simulation projects. Therefore, a context-specific investigation of project success is required.

The situation in the simulation projects domain is much less advanced. While there have been many efforts to identify and discuss success factors, there has been little effort to produce instruments that measure success. Robinson (1998) is one of very few articles that proposes a measure of simulation project quality. However, the proposed instrument, SimQual, seemed daunting for customers, perhaps mainly because of the length of the survey questionnaire, asking respondents more than 130 questions about 62 indicators. This highlighted the need for a more pragmatic view to the issue. In his later publication, Robinson presents the notion of a *simulation quality trilogy* where the quality of a simulation project is characterised by three concepts: content, process and outcome (Robinson, 2002). The research, however, remains at the conceptual level and does not present a quantitative framework for assessment.

The majority of studies that present KPIs to measure the projects’ success in both simulation contexts (eg, Robinson, 1998) and non-simulation ones (eg, Lam *et al*, 2007; Luu *et al*, 2008) use the judgemental method of data collection. Survey respondents are asked to reflect on their opinions based on

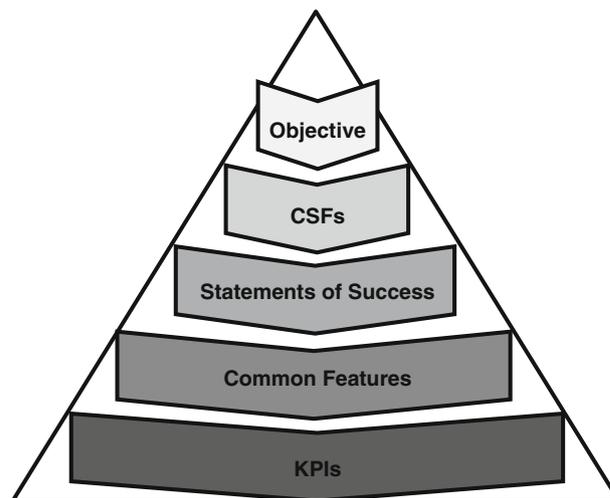


Figure 1 Proposed top-down CSF/KPI framework.

qualitative measures such as ‘the level of agreement with a specific statement’. This leaves the research exposed to judgemental biases, whereas using quantitative measures could mitigate this weakness. Examples of these quantitative studies include Robinson (1998) (3 projects), Chan and Chan (2004) (3 projects), Chan *et al* (2004) (3 projects), Cheung *et al* (2004) (1 project) and Luu *et al* (2008) (15 projects). As noted each of these studies review a small number of projects to derive their conclusions.

The review of literature exhibits a gap in advancing this study to the stage that the quantitative *measures* would guide the improvements. Therefore, this paper aims to focus on the quantitative side of success in the context of simulation projects. More specifically, we will adopt a *top-down* approach to develop KPIs whereby a simulation project’s success can be measured and compared in a more pragmatic way.

3. Methods

A top-down framework is presented which links CSFs to a set of KPIs. The principal aim is to start from the quite vague and ambitious goals or objectives, namely project’s success, to CSFs and finally towards the very concrete and measurable outcomes (KPIs). Such an approach allows a top-down connection between *strategic* and *operational* activities, where CSFs represent strategic focus areas and KPIs represent operational performances. Two interim steps, namely the development of *Statements of success* and *Common Features*, are proposed in order to enable an informed path from CSFs to KPIs. Figure 1 demonstrates this top-down, hierarchical framework. Finally, an exemplar study that uses data from 9 specific simulation projects, to which we had access, is carried out to derive conclusions. A questionnaire is developed to collect the project’s performance data based on the KPIs.

Table 1 Five selected CSFs and their coverage in terms of *stakeholders* and *consistency* perspectives

CSF	Stakeholders		Time-based	
	Providers	Customers	Short-term	Long-term
Communication and interaction between the provider and the customer	✓	✓	✓	—
Competence of the provider	—	✓	—	✓
Responsiveness to the customer’s needs and expectations	—	✓	✓	—
Involvement of the customers	✓	—	✓	—
Customer’s organisation	✓	—	✓	—

3.1. Critical success factors (CSFs)

A simulation project’s success, which can represent the ultimate objective, has a number of dimensions that are supposed to be covered by the CSFs, a limited number of success factors that constitute the building blocks of this framework. In that sense, our study uses the success factors developed by Robinson and Pidd (1998), which is arguably the most prominent one in the context of simulation projects and has also been adopted by some other researchers (eg, Altsitsiadis, 2011). Robinson and Pidd (1998) present 19 dimensions of success in the simulation projects cited by 10 providers and 10 customers of these projects. Each dimension can be seen as a *success factor*. The list is claimed to cover *the achievement of the project’s objectives*, as well as *customer acceptance* stages that are under the simulation provider’s control.

Robinson and Pidd (1998) identify 19 dimensions of success. However, according to the recommendations made originally by Daniel (1961), there are three to six key factors that determine success. We thus used a ranking method based on the total frequency of citations in Robinson and Pidd (1998) as a way to identify CSFs. The top five in the ranked list were selected on the basis of the number of citations by those Robinson and Pidd interviewed. Such a selective approach is key to the pragmatic objective of the study in a sense that the assessment instrument will be used effectively and efficiently by key stakeholders. The selected CSFs are shown in Table 1, along with their coverage in terms of *stakeholders* and *time-based* perspectives, as explained earlier in Section 1. This implies that these five factors work well to cover those two perspectives. For example, the *Communication and interaction between the provider and the customer* factor could be a success factor from both providers’ and customers’ perspectives in a sense that both groups require to share some information with each other effectively throughout the project as a key element of success. *Competence of the provider*, however, is seen as a CSF only from customers’ point of view, while seen by the providers mostly as a costly factor.

From the time-based perspective, the *communication and interaction* factor can only help towards the success of the particular project for which the provider and the customer are communicating about, whereas the *competence of the provider*

factor could be one that would attract further contracts and potential profits for the provider organisation in the future even though it might be costly in short-term.

3.2. Key performance indicators (KPIs)

A KPI is a quantifiable measure that is used to gauge or compare performance in terms of meeting strategic and operational goals. Therefore, KPIs must be aligned with the objectives. An appropriate approach to secure such alignment would be through the CSFs (Parmenter, 2010).

A fundamental element of our framework is concerned with the identification of KPIs and their connection with the CSFs, where there is a lack of evidence in the context of *simulation project* success. We intend to suggest up to three KPIs that will cover different aspects of each CSF in the best way possible. The whole set of KPIs will then work as a method to quantify a project’s success from various perspectives.

In order to do so, we propose two interim steps, the main purpose of which is to enable a sensible, informed path from CSFs to KPIs. The approach we use is to dig into the expert opinion survey conducted by Robinson and Pidd (1998) on each CSF in order to identify its key characteristics, which will then be used to inform the development of KPIs.

The first step involves a notion we call *Statement of Success*, or so-called *cited factor* in the Robinson and Pidd (1998) study, which is the providers’ and customers’ perceptions of success factors in their own language. Each CSF is associated with a set of statements of success. For instance, the CSF ‘communication and interaction between the provider and the customer’ represents 41 statements of success, such as ‘There will be regular communication between the provider and customer’ or ‘The customer will be constantly informed about progress on the project’. These statements provide us with more detailed information about each CSF; hence they can be used as a part of our top-down approach to reach the KPIs. We use a total of 164 statements of success associated with all five selected CSFs as presented in the Robinson and Pidd (1998) study.

In the second step, we propose another notion called *Common Feature*, which characterises a limited number of features—maximum three—that are perceived to be common among the set of statements of success associated with one individual CSF.

Table 2 Proposed *Common Features* in association with each selected CSF

<i>CSF</i>	<i>Common Features</i>		
Communication and Interaction between the provider and the customer	Frequency of communications	Communication effectiveness	Information to share with customers
Competence of the provider	Knowledge of simulation	Simulation experience	Knowledge of the context
Responsiveness to the customer's needs and expectations	Benefits for customer	Timescale for delivery	Flexibility
Involvement of the customers	Continuity of involvement	Active involvement (teamwork)	Involvement of 'Key stakeholder groups'
The customer's organisation	Organisational support & commitment	Organisational knowledge of simulation	Shared organisational knowledge of problem

Indeed, these common features are to encapsulate a set of statements of success into a manageable set of criteria. For instance, one common theme about the above two statements in the previous paragraph is regularity and continuity of the communication, for which we propose one common feature called 'Frequency of Communications'. Table 2 presents 15 proposed common features for the five selected CSFs. Tables A1-A5 in the Appendix shows a detailed account of how these common features are associated with the 164 statements of success.

Finally, we propose one KPI for each common feature. In order to avoid judgemental biases, quantitative data-based indicators are suggested for 14 out of the 15 KPIs. For example, we suggest 'average no. of communications per month throughout the project' as a KPI for the *Frequency of Communications*. The only KPI that requires a qualitative data-based response is *communication effectiveness* for which we could not find an appropriate quantitative indicator. The use of quantitative data-based indicator for the KPIs will provide the proposed framework with the following advantages:

- Low exposure to judgemental bias
- Smaller sample size needed for survey data collection: due to two reasons; firstly lower bias is involved, and secondly the survey asks for verifiable quantitative data with regards to each KPI.
- Easier for stakeholders to complete the questionnaire: because respondents will be asked for factual data that is easier to portray than it is with the subjective opinions.

Table 3 presents the association between *common features* and proposed KPIs, along with the description of associations.

3.3. Data collection instrument

A questionnaire was developed that was used to collect data about each of the 15 KPIs with regards to the project. Each question in the questionnaire corresponds to one KPI. A five-point multi-choice format was used for all the KPIs to allow for consistency. Responses are coded from 5 (most successful) to 1 (least successful), which are actually the coded KPI values.

The questionnaire was tested and modified through a pilot survey with three members of the provider organisations. See the appendix for the questionnaire used in this study.

3.4. Overall success measures

Two measures based on the KPIs are suggested that facilitate the assessment of a project's performance. The first one is called the *Project's Success Measure (PSM)*, calculated as a percentage:

$$PSM = \frac{w_i \sum_j KPI_{ij}}{\text{Total no. of KPIs}} \times 100 \quad (1)$$

where i and j refer to the CSF indice and its related KPI indice respectively, and w_i is the weight of the i th CSF calculated as:

$$w_i = \frac{c_i}{\sum_{i=1}^5 c_i}$$

where c_i is the number of citations associated with i th CSF, as reported in Robinson and Pidd (1998) and shown in Table 4. PSM could be used to represent each project's level of overall success relative to others, as well as against a target.

The other measure, called the *Success Factor Measure (SFM_i)*, represents the project's performance in the area of success factor i . *SFM* is calculated as a percentage:

$$SFM_i = \frac{\sum_j KPI_{ij}}{\text{No. of KPIs associated with CSF}_i * 5} \times 100 \quad (2)$$

where i and j refer to the CSF indice and its related KPI indice respectively, and the value 5 in the denominator indicates the number of choices associated with each KPI in the questionnaire. This measure will enable the management team to conduct a *Drill-Down* assessment for one CSF in order to explore the areas of project's weakness or strength.

4. Exemplar studies

The framework was put into test with data from 9 exemplar cases of modelling and simulation with a wide range of progress and achievement levels. This allowed a better assessment of the

Table 3 Proposed KPIs and their association with the selected CSFs

<i>CSF</i>	<i>Common feature</i>	<i>KPI</i>	<i>Description of association</i>
Communication and Interaction	Frequency of Communications	Average number of communications (of any types) per month throughout the project	Frequency is arguably the best and easiest indicator to measure regularity. All modes of communication are taken into account because multi-channel communication is believed to be a preferred practice. This is a very qualitative feature, hence using a subjective indicator. It looks at the effectiveness mainly from two perspectives; two-way interaction, and ongoing improvement of effectiveness. The KPI will be quantified using a multi-choice question. Customers prefer to be shared about different kinds of information. So, a good indicator would be one to specify how many from this list has actually been shared. This list comes from the related statements of success.
	Communication effectiveness	Level of communication effectiveness in the interaction between customers and providers	
	Information to share with customers	Number of items from this list shared with the customers in the project: Potential benefits, objectives, plan, project specifications, model, progress, findings/results.	
Competence of the provider	Knowledge of context	Total number of simulation projects previously carried out by the provider in the sector	Previous experience of the provider in the sector will best represent its knowledge of context. Also easy to measure.
	Knowledge of simulation	Number of provider's staff in the project with formal simulation/OR training	Staffs are arguably the best source of knowledge in the provider organisation. Also, the number of experts allocated to a project could demonstrate teamwork synergies in conducting simulation work. Formal training gives the KPI a rigorous attribute to measure. Also easy to measure.
Responsiveness	Simulation experience	Total number of previous simulation projects carried out by the provider	Arguably the best and easiest way to measure the experience.
	Benefits for customers	Number of benefits obtained from this list in the lifetime of the project: (1) Greater understanding of the process (2) Improved communication (3) Better team integration (4) Better development of skills (5) Risk reduction (6) Operating cost reduction (7) Throughput increase (8) Faster implementation of changes (9) Capital cost reduction	The list is extracted from the Hollocks (1995) survey. It includes both qualitative and quantitative benefits, which could be applicable at different stages throughout a project.
	Timescale for delivery	Percentage of project's lateness	Arguably the best and easiest means to measure on-time delivery.
	Flexibility	Percentage of change requests from customers met by the provider over the course of the project	Customers almost always make interim change requests. There needs to be a balanced response by the provider to these requests. If requests are documented, the percentage of requests met can be a good and easily measurable representative of the provider's flexibility.
Involvement	Continuity of involvement	Number of steps from this list that customers have been actively involved in: (1) Problem definition (2) data collection (3) model building (4) model validation and verification (5) experimentation (6) analysis of results (7) dissemination (8) project review	This is about continuous, active involvement of the customers throughout the project. These eight generic steps represent the lifecycle of typical simulation projects. The list is also informed by the Statements of success.
	Active involvement (teamwork)	Number of people at customer's organisation that had an active role in the project	Active involvement means being a part of the team and having direct roles in the project.
	Involvement of Key stakeholder groups	Number of customer's organisational units (Management, Specialists, R&D, Information Centre, ...) actively involved in the project	The more number of organisational units involved, the better the project has secured appropriate involvements from various key groups. Also easy to measure.

Table 3: *Continued*

<i>CSF</i>	<i>Common feature</i>	<i>KPI</i>	<i>Description of association</i>
Customer's organisation	Organisational support & commitment	Number of people at the customer organisation's top management level actively involved in the project	Management support is key to the whole organisational commitment. One of or perhaps the best way to secure their support is to involve them as named in the project.
	Organisational knowledge of simulation	Number of people at the customer's organisation involved in the project with Simulation/OR formal training	Staffs are arguably the best source of knowledge in the customer's organisation. Formal training gives the KPI a rigorous attribute to measure. Also easy to measure.
	Shared organisational knowledge of problem	Number of people at the customer's organisation involved in the problem definition	This is about how well the organisation has contributed to the definition of problem and set objectives at the outset. Because stakeholders have various perspectives to the problem, the best measure to capture a full picture could be to look at the number of stakeholders involved in the problem definition stage of the project.

Table 4 CSFs and their associated weight values (w_i)

	<i>Communication & Interaction</i>	<i>Competence of the provider</i>	<i>Responsiveness</i>	<i>Involvement</i>	<i>Customer's organisation</i>
<i>Number of citations</i>	86	79	71	61	59
w_i	0.242	0.222	0.2	0.171	0.165

framework in terms of its ability to distinguish between projects with a wide range of success levels. These exemplar cases were carried out by a team of modelling experts from five organisations—mostly academics—in health-care settings during 2007–2008. Table 5 summarises these 9 cases and the progress made from only defining the problem (Stage 1) to implementation of the findings (Stage 6).

We contacted 14 people from the provider organisations and collected their assessment based on our KPI framework for the 9 exemplars using the questionnaire in Figure 2. The completed questionnaires were received within 3 weeks. Where there was more than one person involved in an exemplar case, a consensus was made through sharing the responses between the people and asking for a single set of responses.

5. Results and analysis

The results from the questionnaire for the 9 exemplar cases are shown in Table 6.

5.1. Project's success measure (PSM)

Figure 2 presents the results of a comparative analysis on the basis of the PSM values. The projects are sorted on a descending order of PSM. All the top four cases, namely case numbers 1, 4, 8 and 9 went through a full-scale simulation project and

produced some results at the end. The case numbers 1 and 9 also reached the implementation stage. The four cases, however, were different in a way that would influence their overall success, which will be explained in the next section.

On the other side of the spectrum, none of the bottom three cases, namely case numbers 7, 2 and 3, went through a full-scale simulation project or produced any hard results. The case number 3 was particularly different in a sense that the project came to a halt at a very early stage following a health condition that occurred to the key contact person in the customer organisation.

5.2. Comparative analysis by the SFM measures

Figure 3 presents the results of a comparative analysis based on the projects' performance on each critical success factor, or so-called SFM measure. As seen in the figure, there are exemplar cases that perform rather well on some factors but rather poorly on some others. An example is the case number 7, which achieves an SFM of 87% on the *Communication and Interaction* factor while having a poor performance of 27% on the *Customer Organisation* factor. Another example is case numbers 4 and 8, which show a relatively poor assessment on *Customer Organisation* in particular, unlike their overall good performance in all other SFMs. This implies that these cases did not experience a high level of organisational support from the customers, which could be because of a lack of enough

Table 5 Simulation exemplar cases

Exemplar number	Case Description	Progress Score (1. Problem definition, 2. Conceptual modelling, 3. Simulation model building and testing, 4. Experimentation, 5. Project completion, 6. Implementation)
1	Design of intermediate care services in a shire county in the north of England. The purpose was to undertake a systematic analysis and modelling of current and future need together with a gap analysis comparing need with current capacity in order to inform future commissioning intentions (Eldabi <i>et al</i> , 2011).	6 A full-scale simulation modelling project including all 6 stages.
2	Developing and modelling scenarios on the sustainability of 18-week target—from referral to treatment—for out-patients appointments, and on 4-hour target—from registration to treatment—in the emergency departments of two NHS Trusts in the south-east of England.	1 The first stage, that is, problem definition only, was carried out.
3	Developing and modelling scenarios on meeting 18-week target—from referral to treatment—in a Urology out-patients clinic in a central London hospital.	1 The first stage, that is, problem definition only, was carried out.
4	Developing and modelling scenarios on meeting 4-hour target—from registration to treatment—in an emergency department in a west London hospital (Coughlan <i>et al</i> , 2011)	5 An almost full-scale simulation project that went up to Stage 5. It produced some results and recommendations but did not reach implementation.
5	Whole pathways modelling of self-harm emergency care in an NHS Trust in the south of England. The purpose was initially to provide insight and a view of the system to its operator agencies, and at a later stage to develop a model that explicates problems in the system (eg, 'bottlenecks') and facilitates the identification of means to alleviate them (eg, by redistribution or addition of resources).	2 Went up to Stage 2 only and produced some process mapping charts.
6	Managing referral to cardiac surgery in 9 feeder hospitals in the south of England. The main purpose was to improve on longer waiting list with more variance than desired, through improved coordination with the feeder hospitals.	2 Went up to stage 2 only and produced some process mapping charts.
7	Reducing length of stay for patients with complex medical conditions in an acute hospital in east of England	2 Went up to Stage 2 only and produced some process charts.
8	Reducing length of stay within hospital and community services for stroke patients in a Northern Ireland NHS Trust through simulation modelling of patient pathways (McClellan <i>et al</i> , 2011)	5 An almost full-scale simulation modelling project that went up to Stage 5. It produced some results, which were of more theoretical nature, but did not reach implementation.
9	Identifying bottlenecks in an out-patients clinic of a hospital in south of England in order to address the 18-week target.	6 Simulation modelling was conducted but with incomplete data and the project stopped before it gets to the model validation. Yet, the results of the first set of runs were used by the customers.

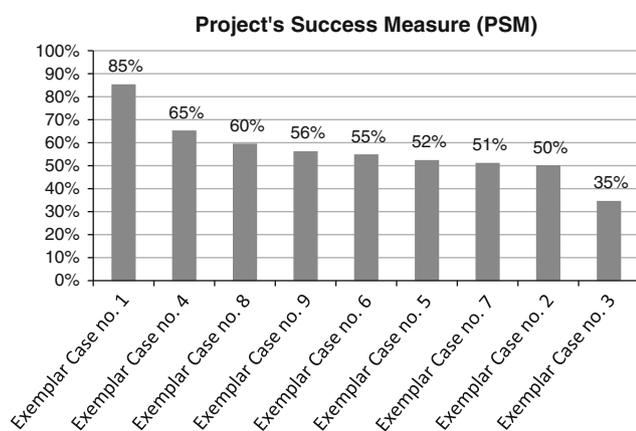


Figure 2 Projects assessment based on the PSM measure.

simulation knowledge within the UK health-care system. Organisational support is essential for the results to be implemented and real impacts to be realised. Also, the case number 9 is characterised by two lower than 50% SFMs, namely *Involvement* and *Customer organisation*. Its low score on the *Involvement* factor might reflect the issue regarding disengagement of the customers from the project.

Almost all the cases reported a relatively high performance with regards to the *Provider's Competence*. This is true because the providers' team belonged either to the academic community or experienced consultancy companies. The only exception was the team involved in case number 7 who were specialised mostly in other types of modelling, rather than simulation modelling. This explains the main reason why this case did not reach the stage of developing the simulation model.

Table 6 KPI values of 9 exemplar cases obtained via the questionnaire

CSF	Common features	Exemplar cases								
		1	2	3	4	5	6	7	8	9
Communication & Interaction	Frequency of communication	5	2	1	4	2	3	5	2	2
	Communication effectiveness	4	4	3	3	4	3	3	3	4
	Information to share	5	2	1	4	2	2	5	5	3
Provider competence	Simulation experience	5	4	4	4	5	5	2	4	4
	Knowledge of context	4	4	4	3	5	5	1	4	4
	Knowledge of simulation	2	2	2	4	2	2	2	2	3
Responsiveness	Benefits for customers	3	1	1	1	1	1	1	2	3
	Timescale for delivery	5	4	1	4	2	3	5	5	4
	Flexibility	5	1	1	5	5	5	1	1	2
Involvement	Continuity of involvement	5	1	1	3	1	1	3	5	3
	Active involvement (Teamwork)	5	2	1	2	1	2	2	2	2
	Active involvement of key stakeholder groups	5	2	1	4	1	1	3	3	2
Customer's organisation	Organisational support and commitment	5	2	1	2	1	2	1	2	2
	Organisational knowledge of simulation	1	3	1	1	1	2	1	2	1
	Shared organisational knowledge of problem	5	3	2	2	5	3	2	2	2

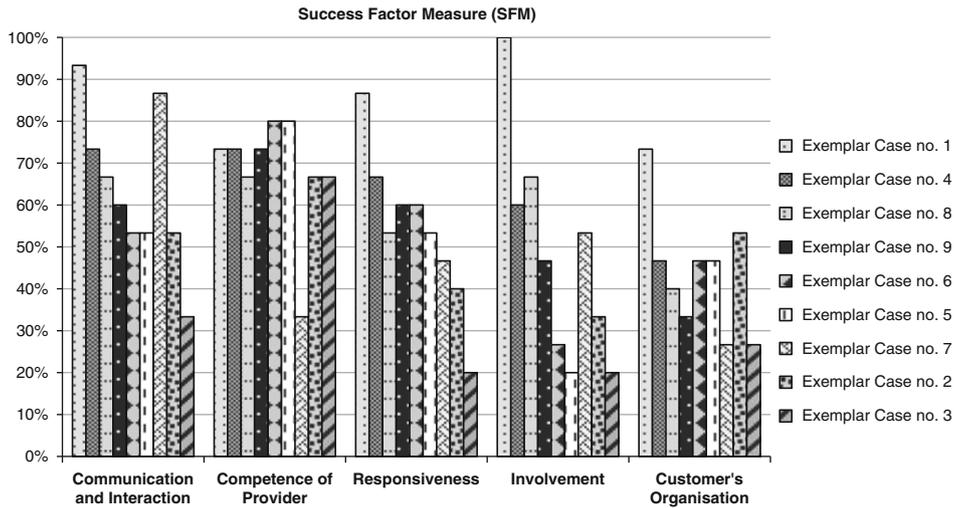


Figure 3 Assessment and comparison of the exemplar cases based on the SFM measure.

A relatively high performance of the less successful case number 2 with regards to the *Customer Organisation* is interesting. This was mainly attributed to the fact that the customer’s first contact people were mostly working at the strategic level; hence there was a high level of familiarity and acceptance among this group about the simulation project. However, an active involvement from other key stakeholder groups did not happen, which explains a low score on the *Involvement* factor.

By calculating average scores for each SFM across the 9 exemplar cases, as presented in Figure 4, it can be observed that two out of the five CSFs, namely *Involvement* and *Customer Organisation* show a performance of less than 50%. The situation with regards to the *Customer Organisation* is the poorest. This result may point to areas that generally need more attention in practice.

5.3. Correlation analyses

5.3.1. *Between the progress score and the overall success of the projects.* A Pearson correlation analysis between the progress scores and the overall success of the projects—based on the PSM values—produced a Correlation Coefficient of 0.763, which demonstrates a strong positive association.

5.3.2. *Between the CSFs and the overall success of the projects.* A Pearson correlation analysis between the CSFs and the overall success of the exemplar cases—based on the SFM and the PSM values—revealed that four out of the five factors, namely *Responsiveness*, *Involvement*, *Communication and Interaction*, and *Customer’s Organisation* hold strong associations with the overall success level of the projects, while

Responsiveness represents the strongest association (Figure 5). On the other hand, *competence of the provider* factor exhibits a very low correlation. Table 7 presents Correlation Coefficient values.

5.4. Analysis based on individual KPIs

A further analysis is possible by drilling down one level further to investigate each individual KPI. For example, the case number 1, which is the most successful one in terms of the PSM measure, shows a poor score with regards to *organisational knowledge of simulation*. Knowing this could help the provider to improve organisational knowledge for future projects. In this particular case, for example, the provider organisation could arrange simulation training for some key stakeholders during the early phase of the next project.

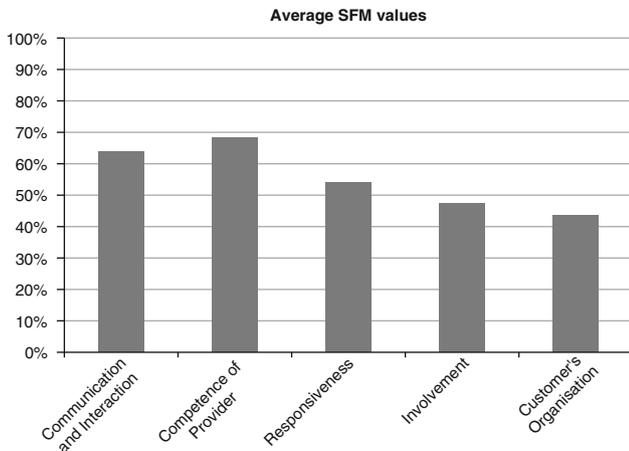


Figure 4 Average SFM values across the 9 exemplar cases.

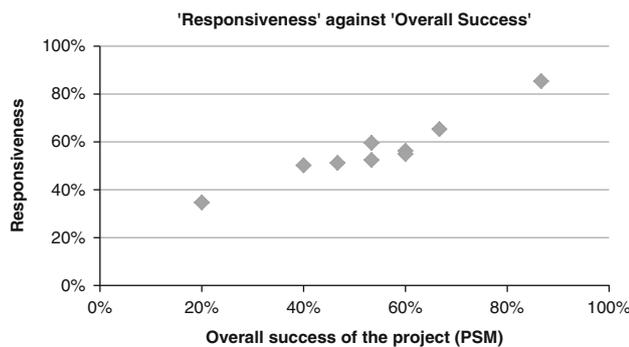


Figure 5 Correlation between Responsiveness and PSM values.

Furthermore, a bird’s-eye view to the KPI scores across projects could help identify the problem areas in general in simulation practice. For this purpose, Figure 6 presents average KPI values across all 9 exemplar cases in our study. The average score for *organisational knowledge of simulation* in our survey of nine exemplar cases is 29%, which is the lowest score among the 15 KPIs. This highlights the importance of simulation awareness and training programs in our context, healthcare.

The second lowest average score is for the *benefits for customers* indicator with an average score of 31%. This highlights the point that the simulation cases have not quite achieved in producing expected amounts of benefits for customers, which is vital to the success of any project. Case number 4 is an example where simulation results were generated but not implemented, hence less actual benefits for customers were realised. This has been reflected in the lowest scoring of the exemplar case for that particular KPI.

Organisational support and commitment, with 40% average score presents the third lowest performance measure. Management’s supports play a key role from different aspects. Apart from its financial support of the project, its moral support will motivate other stakeholders in the client’s organisation to have a high commitment.

6. Discussion

The results of our exemplar studies can be discussed from two perspectives. One is to assess the reliability of our proposed framework, and the other is to identify some meaningful patterns in the data, which could in turn inform practice.

On the reliability aspect, the results on the PSM measure shows an overall consistency with the comparative level of progress and achievements made throughout the exemplar cases. The analysis of the results suggests that the proposed framework has the capability to distinguish between projects in terms of the level of success achieved from different perspectives. For example, even though all the four case numbers 1, 4, 8 and 9 reached the final simulation stage and produced results, their PSM values illustrate a clear superiority of the case number 1, which reached the full implementation phase, against the other three, which either did not (case numbers 4 and 8) or partially did (case number 9). This is also interesting in a sense that the simulation projects normally end and then the results are implemented. In fact, in addition to a multi-faceted approach to the success, if our proposed framework is used in the middle of the simulation project it seems to exhibit an anticipatory view of success too as a predictor of likely implementation and ultimate success. This seems evident because it is highly likely

Table 7 Correlation Coefficients between the CSFs and the overall success of the project based on the 9 exemplars’ data

Responsiveness	Involvement	Communication and interaction	Customer’s organisation	Competence of the provider
0.955	0.874	0.798	0.792	0.228

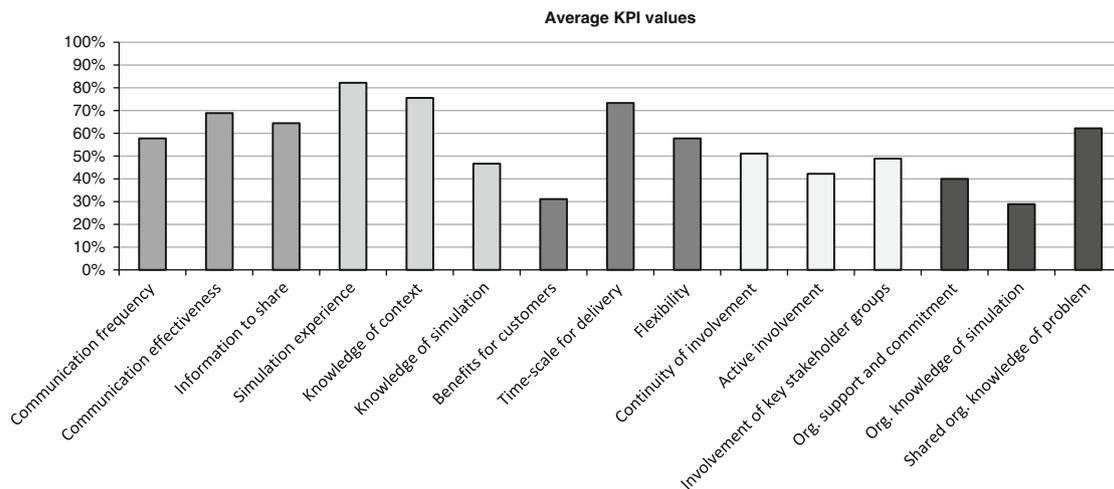


Figure 6 Average KPI values across the 9 exemplar cases.

that an interim success would lead to an ultimate success. The primary objective of the proposed framework, however, is to evaluate the project's *current* success on the basis of its past performance.

Another interesting result is about case number 9. Even though the impression is that this case might be a highly successful project because it went through all the stages of a simulation project and produced some results that were used by the customers, the PSM score was just in a moderate range (56%). The fact of the matter is that this case can be seen as an incomplete version of a simulation project, which failed to secure full engagement and customer support, hence resulted in a premature halt of the project. Therefore, it can be implied that our proposed framework was able to consider different facets of success in a simulation project, and to avoid possible short-sighted biases.

Also, as proved by the correlation analysis presented earlier in Section 5.3.2, four out of the five CSFs showed a strong capacity in differentiating between successful and unsuccessful projects. This finding suggests that the proposed framework could be used—with confidence—to evaluate the success of simulation projects. Interestingly, *responsiveness* to the clients' expectations shows the strongest correlation with $r=0.955$. It might mean that the 'Responsiveness' factor can better represent the overall success of a project if used individually. What really matters is how much a simulation study has helped the customers to achieve their objectives. This point reminds providers—who think customers might be wrong about the problem and how to tackle it—to reconsider and be more responsive. The outcome will ultimately be translated into success for both the customers and the providers; an ideal situation in a success study. Furthermore, *involvement* as the second strongest factor with a very high correlation coefficient, $r=0.879$, shows the importance of such subjective criteria in securing the overall success of projects. This finding confirms the widespread evidence on the significance of *stakeholder*

engagement factor (eg, Fildes and Ranyard, 1997; Melão and Pidd, 2003; Brailsford *et al*, 2009 and Taylor *et al*, 2009). Another interesting finding is about the weak correlation between the *competence of the provider* factor and the overall success, which is very similar to the finding by Robinson (2002) where it claims that there is a greater emphasis by both modellers and customers on the *process* of a simulation study in making quality judgements than there is on the *content* of a simulation study.

Overall, looking at the results of the 9 exemplar cases as a sample, a general pattern can be observed and discussed. Customer's organisational capacity to support the project showed the poorest result within the set of 9 exemplar cases. More specifically, there were clear indications of poor management support and simulation knowledge in the customers' organisations to back the projects internally. Lack of familiarity and awareness about the simulation capacity and benefits appears to be playing a key role in this (Murphy and Perera, 2002). Little effort has been made to generate and collect evidence on the cost/benefit assessment of simulation projects (Jahangirian *et al*, 2010) and to present that in an effective way to the community of management practitioners. A need for an integration of simulation training within the management curriculum, especially in the European countries, is also evident (Murphy and Perera, 2002).

The selection of CSFs in our study, based on the work by Robinson and Pidd (1998), were informed by views from both the provider and the customer groups. Our exemplar study, however, used evaluation of the projects' performance by providers only. This was mainly because of the fact that we could only have access to the providers. While, there are some indicators, such as the ones in the *Competence of the provider* category, that can be better evaluated by the providers, some others, such as the ones in the *Responsiveness* category, could be addressed to the customers. Yet, there are some areas, such as the *Communications and interactions* category, that could

improve by responses from a combination of both groups. However, we believe that a quantitative data-based approach adopted in our framework can mitigate possible biases in the evaluation process.

7. Conclusions

Traditional project management techniques take *cost, time* and *end product quality* factors—or so-called *Iron Triangle*—into account and provide the project managers with information only on these three attributes in order to plan and control the project. While they have been useful to some extent, research studies have suggested that it is difficult to manage projects using these traditional techniques (eg, Baccarini, 1996; Williams, 1999; Bryde, 2005; Pundir *et al.*, 2007). It is even more difficult in consulting projects, such as simulation studies, where the immediate products are rather intangible. For example Robinson (2002) highlights the greater importance of process over content. Therefore, it is important to recognise that the success of such projects cannot be linked only to the end products. A more *process-oriented* view with some attention to the intangible benefits needs to be taken on board. For example, a project that would not reach the final stage, might still gain some scores on such intangible criteria as ‘increased understanding of the system and potential system improvements in the future’.

The study of CSFs, which brings in a wide range of perspectives alongside the Iron Triangle, has become a popular area of research to address the complexity of projects and this paper shows its applicability in simulation projects. However, the mainstream research has not gone beyond the identification of success factors. There has been a clear gap in advancing this topic to the stage that a multi-faceted view of a simulation project could be quantified and then used to manage the project towards success. To address this, we present a top-down framework on the basis of KPIs linked to CSFs whereby the concept of *simulation project success* can be quantified. Such a multi-faceted approach allows a wider application.

The results of our survey on 9 exemplar cases and correlation analyses on the results provided some support for the reliability of our proposed framework. Further, an analysis of the results highlighted some areas that might represent a general pattern. For example, the 9 cases produced consistently lower scores on *the customer’s organisational capacity to support the simulation project*, which is crucial in securing the implementation of results. Simulation providers could fill the gap regarding the simulation awareness in the customer organisations with short training programs for key stakeholders during the early phase of the project.

The results suggest that our proposed framework and questionnaire could be used with some confidence to measure performance, to monitor and to benchmark simulation projects, but further testing is needed. Performance measurements using the questionnaire could be done both during the course of the

project or after its completion. The analysis of the performance measurements, through drilling down to the individual KPIs, could facilitate the identification of issues in a simulation project. A complementary research direction could be to study how the CSFs could be ‘embedded’ in emerging simulation methodologies and tools such as enterprise business process simulation (Liu and Iijima, 2015) and construction engineering (AbouRizk *et al.*, forthcoming).

This work is by no means complete and has its limitations. The selection of CSFs in our study, based on the work by Robinson and Pidd (1998), were informed by views from both the provider and the customer groups. However, our exemplar study used evaluation of the projects’ performance by providers only. This limitation, we believe, could be removed by involving customers in the future surveys. Further work might also be allocated to fine tuning our questionnaire constructs based on future surveys. New survey studies measuring simulation projects’ performances using our proposed framework could also provide some useful general insights into the areas of concern in simulation practice. These could be further complemented by studies of the impact of causal factors on the success of simulation projects (Jahangirian *et al.*, 2015).

While the scale of our exemplar study (9 exemplars) is similar in magnitude with the existing published research, the methodology will benefit from reflections on further exemplar studies. This research adopted data from health-care sector that were available to the authors; hence there might be a potential health bias. Similar studies using data from other sectors could provide insights on comparable findings. Further research could also be dedicated to confirm the weights used for each CSF.

Acknowledgements—This study was supported by the Multidisciplinary Assessment of Technology Centre for Healthcare (MATCH) program (EPSRC Grant EP/F063822/1). The authors wish to thank the simulation experts for taking part in the survey of 9 exemplar cases.

References

- AbouRizk S, Hague S, Ekyalimpa R and Newstead S (forthcoming). Symphony: A next generation simulation modelling environment for the construction domain. *Journal of Simulation*. doi:10.1057/jos.2014.33.
- Agarwal N and Rathod U (2006). Defining ‘success’ for software projects: An exploratory revelation. *International Journal of Project Management* **24**(4): 358–370.
- Al-Tmeemy SH, Abdul-Rahman H and Harun Z (2011). Future criteria for success of building projects. *International Journal of Project Management* **29**(3): 337–348.
- Altsitsiadis E (2011). Marketing health care simulation modelling: Towards an integrated service approach. *Journal of Simulation* **5**(2): 123–131.
- Baccarini D (1996). The concept of project complexity: A review. *International Journal of Project Management* **14**(4): 201–204.
- Belassi W and Tukel OI (1996). A new framework for determining critical success/failure factors in projects. *International Journal of Project Management* **14**(3): 141–151.

- Brailsford S (2005). Overcoming the barriers to implementation of operations research simulation models in healthcare. *Clinical and Investigative Medicine* **28**(6): 312–315.
- Brailsford SC (2007). Advances and challenges in healthcare simulation modelling: Tutorial. In: Henderson SG *et al* (eds). *Proceedings of the 2007 Winter Simulation Conference*, IEEE Computer Society Press: Piscataway, NJ, pp 1436–1448.
- Brailsford SC, Bolt T, Connell C, Klein JH and Patel B (2009). Stakeholder engagement in health care simulation. In: Rossetti MD, Hill RR, Johansson B, Dunkin A and Ingalls RG (eds). *Proceedings of the 2009 Winter Simulation Conference*, IEEE: Austin, TX, pp 1840–1849.
- Brailsford S and Vissers J (2011). OR in healthcare: A European perspective. *European Journal of Operational Research*. **212**(2): 223–234.
- Bryde DJ (2005). Methods for managing different perspectives of project success. *British Journal of Management* **16**(2): 119–131.
- Chan APC and Chan APL (2004). Key performance indicators for measuring construction success. *Benchmarking: An International Journal* **11**(2): 203–221.
- Chan APC, Scott D and Chan APL (2004). Factors affecting the success of a construction project. *Journal of Construction Engineering and Management* **130**(1): 153–155.
- Cheung SO, Suen HC and Cheung KK (2004). PPMS: A web-based construction project performance monitoring system. *Automation in construction* **13**(3): 361–376.
- Chow T and Cao D (2008). A survey study of critical success factors in agile software projects. *Journal of Systems and Software* **81**(6): 961–971.
- Cooke-Davis T (2002). The real success factors on projects. *International Journal of Project Management* **20**: 185–190.
- Coughlan J, Eatock J and Patel N (2011). Simulating the use of re-prioritisation as a wait-reduction strategy in an emergency department. *Emergency Medicine Journal* **28**(12): 1013–1018.
- Daniel RD (1961). Management information crisis. *Harvard Business Review* **39**(5): 111–121.
- Eldabi T (2009). Implementation issues of modeling healthcare problems: Misconceptions and lessons. In: Rossetti MD, Hill RR, Johansson B, Dunkin A and Ingalls RG (eds). *Proceedings of the 2009 Winter Simulation Conference*, IEEE: Austin, TX, pp 1831–1839.
- Eldabi T, Lacey P, Naseer A and Jahangirian M (2011). Integrated care development using systems modelling—a case study of intermediate care. In: Jain S, Creasey RR, Himmelspace J, White KP and Fu M (eds). *Proceedings of the 2011 Winter Simulation Conference*, IEEE: Phoenix, AZ, pp 3037–3047.
- Fildes R and Ranyard JC (1997). Success and survival of operational research groups—A review. *Journal of the Operational Research Society* **48**(4): 336–360.
- Harper PR and Pitt MA (2004). On the challenges of healthcare modelling and a proposed project life cycle for successful implementation. *Journal of the Operational Research Society* **55**(6): 657–661.
- Hollocks BW (1995). The impact of simulation in manufacturing decision making. *Control Engineering Practice* **3**(1): 105–112.
- Jahangirian M, Taylor SJ and Young T (2010). Economics of modeling and simulation: reflections and implications for healthcare. In: Johansson B, Jain S, Montoya-Torres J, Hagan J, and Yücesan E (eds). *Proceedings of the 2010 Winter Simulation Conference*, IEEE: Baltimore, MD, pp 2283–2292.
- Jahangirian M *et al* (2012). Simulation in health-care: Lessons from other sectors. *Operational Research An International Journal* **12**(1): 45–55.
- Jahangirian M, Shah S, Borsci S and Taylor SJE (2015). Causal factors of low Stakeholder engagement: A survey of expert opinions in the context of healthcare simulation. *SIMULATION: Transactions of the Society of Modeling and Simulation International* **91**(June): 6511–6526.
- Lam EWM, Chan APC and Chan DWM (2007). Benchmarking the performance of design-build projects: Development of project success index. *Benchmarking* **14**(5): 624–638.
- Liu Y and Iijima J (2015). Business process simulation in the context of enterprise engineering. *Journal of Simulation* **9**(3): 206–222.
- Lowery JC, Hakes B, Keller L, Lilegdon WR, Mabrouk K and McGuire F (1994). Barriers to implementing simulation in health care. In: Tew JD, Manivannan S, Sadowski DA and Seila AF (eds). *Proceedings of the 1994 Winter Simulation Conference*, IEEE: Piscataway, NJ, pp 868–875.
- Luu VT, Kim SY and Huynh TA (2008). Improving project management performance of large contractors using benchmarking approach. *International Journal of Project Management* **26**(7): 758–769.
- McClellan S, Barton M, Garg L and Fullerton K (2011). A modeling framework that combines markov models and discrete-event simulation for stroke patient care. *ACM Transactions on Modeling and Computer Simulation (TOMACS)* **21**(4): 25.
- McHaney R, White D and Heilman GE (2002). Simulation project success and failure: Survey findings. *Simulation and Gaming* **33**(1): 49–66.
- McIvor R, Humphreys P and McKittrick A (2010). Integrating the critical success factor method into the business process outsourcing decision. *Technology Analysis and Strategic Management* **22**(3): 339–360.
- Melão N and Pidd M (2003). Use of business process simulation: A survey of practitioners. *Journal of the Operational Research Society* **54**(1): 2–10.
- Murphy SP and Perera T (2002). Successes and failures in UK/US development of simulation. *Simulation Practice and Theory* **9**(6–8): 333–348.
- Parmenter D (2010). *Key Performance Indicators: Developing, Implementing, and Using Winning KPIs*. John Wiley & Sons.
- Pundir AK, Ganapathy L and Sambandam N (2007). Towards complexity framework for managing projects. *Emergence Complexity and Organization* **9**(4): 17–25.
- Raynsford N (2000). KPI report for the minister for construction. *Department of the Environment, Transport and the Regions, KPI Working Group*. Available https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/16323/file16441.pdf, accessed 10 October 2013.
- Reel JS (1999). Critical success factors in software projects. *IEEE Software* **16**(3): 18–23.
- Robinson S (1994). *Successful Simulation: A Practical Approach to Simulation Projects*. McGraw-Hill: Maidenhead, UK.
- Robinson S and Bhatia V (1995). Secrets of successful simulation projects. In *Proceedings of the 27th Winter Simulation conference*, IEEE Computer Society: Piscataway, NJ, pp. 61–67.
- Robinson S and Pidd M (1998). Provider and customer expectations of successful simulation projects. *Journal of the Operational Research Society* **49**(3): 200–209.
- Robinson S (1998). Measuring service quality in the process of delivering a simulation study: The customer's perspective. *International Transactions in Operational Research* **5**(5): 357–374.
- Robinson S (2002). General concepts of quality for discrete-event simulation. *European Journal of Operational Research* **138**(1): 103–117.
- Taylor SJE, Eldabi T, Riley G, Paul RJ and Pidd M (2009). Simulation modelling is 50; do we need a reality check? *Journal of the Operational Research Society* **60**(Supplement 1): S69–S82.
- Van Lent WA, Vanberkel P and Van Harten WH (2012). A review on the relation between simulation and improvement in hospitals. *BMC Medical Informatics and Decision Making* **12**: 18. doi:10.1186/1472-6947-12-18.
- Williams TM (1999). The need for new paradigms for complex projects. *International Journal of Project Management* **17**(5): 269–273.

Appendix

1. *Communications and Interactions:*

1.1. Average number of communications (of any types such as f2f, phone calls, emails, written reports, etc.) per month throughout the project:

5 or more 4 3 2 1 or less

1.2. How much and how easy were the interactions and communications between customers and providers understood by both sides?

Very low: Poor understanding by both sides throughout the project with little or no improvement

Low: Some understandings mostly by one side, but with little or no improvement

Average: Some understanding by both sides, with little improvement

High: Good understanding by both sides, with some improvement

Very high: Excellent understanding by both sides all over the life of the project

1.3. How many out of this 7 items were shared with the customers in the project: (1) Potential benefits, (2) Objectives, (3) Plan, (4) Project specifications, (5) Model, (6) Progress, (7) Findings/results All 6 5 3–4 2 or less

2. *Competence of the simulation provider:*

2.1. Total no. of previous simulation projects carried out by the provider: 10 or more 6–9 3–5 1–2 None

2.2. Total number of simulation projects previously carried out by the provider in the sector: 5 or more 3–4 2 1 None

2.3. Number of provider's staff allocated to the project with formal simulation/OR training: More than 2 full-time or equivalent between 1 and 2 full-time or equivalent 1 full-time or equivalent 1 part-time None

3. *Responsiveness:*

3.1. No. of benefits obtained by the customers from this list: (1) Greater understanding of the process, (2) Improved

communication within the customer organisation, (3) Better team integration, (4) Better development of skills, (5) Risk reduction, (6) Operating cost reduction, (7) Throughput increase, (8) Faster implementation of changes, (9) Capital cost reduction. All 7–8 5–6 3–4 2 or less

3.2. Percentage of project's delay against the plan: Less than 30% delayed 30–60% delayed 60–80% delayed 80–100% delayed more than 100% delayed

3.3. Percentage of change requests from customers met by the provider over the course of the project: 80% or more 60–80% 40–60% 20–40% less than 20%

4. *Involvement:*

4.1. No. of steps from this list that customers have been actively involved in: (1) Problem definition, (2) Data collection, (3) Conceptual modelling, (4) Model building, (5) Model validation and verification, (5) Experimentation, (6) Analysis of results, (7) Dissemination, (8) Project review. All 7–8 5–6 3–4 2 or less

4.2. No. of people at customer's organisation that had an active role in the project: 8 or more 6–7 4–5 1–3 None

4.3. No. of customer's organisational units (Management, Specialists, R&D, Information Centre, ...) actively involved in the project: 4 or more 3 2 1 None

5. *Customer's organisation:*

5.1. No. of people at the customer organisation's *top management* level actively involved in the project: 4 or more 3 2 1 None

5.2. No. of people at the customer's organisation with Simulation/OR formal training who were involved in the project: 4 or more 3 2 1 None

5.3. No. of people at the customer's organisation involved in the *problem definition*: 5 or more 4 3 1–2 None

Table A1 Common features for the CSF 'Communication and Interaction between the provider and the customer'

<i>Statement of success</i>	<i>Common features</i>		
	<i>Frequency of communication</i>	<i>Communication effectiveness</i>	<i>Information to share</i>
There will be regular communication between the provider and customer	√	—	—
The customer will be constantly informed about progress on the project	√	—	√
The results will be in a format that is familiar to the customer	—	√	—
Presentations by the provider will be easily understood	—	√	—
A project specification will be provided	—	—	√
The customer will see the model	—	—	√
A written report of the findings will be provided	—	√	√
There will be a plan defining the deliverables and timing for each stage	—	—	√
Documentation and paperwork will have a neat appearance	—	√	—
Minutes of meetings will be provided	—	√	—
The results will be easily understood	—	√	—
The provider will be clear and concise about what the simulation will and will not do	—	√	√
Written documentation will be in a form/language that customers understand	—	√	—
The benefits of the work will be identified and communicated to management	—	—	√
The project specification will be split into its constituent parts, giving options for each level of modelling	—	—	√
The provider will understand and use the language of the customer	—	√	—
The reports will be as agreed to be appropriate	—	√	—
The provider will liaise with people at the right level	Relates to the <i>Involvement</i> dimension under <i>Key stakeholder groups</i>		
Telephone communications will be excellent	—	√	—
Presentation materials will be excellent	—	√	—
Status/interim reports will be provided	√	—	√
Testing plans will be provided	—	—	√
Results and recommendations will be presented successfully	—	—	√
The content of the report will be correct	—	—	√
Email will be used for communications	—	√	—
Results will be presented graphically in reports	—	√	—
Reports will be distributed to the relevant people	—	—	√
The project will be documented	—	—	√
Agendas will be provided	—	—	√
Presentations will not be too detailed	—	√	√
The results will be demonstrated to senior managers	—	—	√
The customer will not be given too much details in reports	—	√	√
The customer will be informed of how the data have been collected	—	—	√
The customer will be informed of how the model has been built	—	—	√
Information will be regularly communicated to the customer in small amounts	√	√	—
The provider will check the customer's understanding	—	√	—
The output from the model will be well marketed	—	√	√
All the results will be provided	—	—	√
The customers will be given the information they want	—	—	√
Information will be communicated using right media (eg presentations or written reports)	—	√	—
The provider will influence people and make them aware of problems	—	√	—

Table A2 Common features for the CSF ‘Competence of the Provider’

<i>Statement of success</i>	<i>Common features</i>		
	<i>Knowledge of simulation</i>	<i>Simulation experience</i>	<i>Knowledge of the context</i>
The provider will have a good knowledge of the process being modelled	—	—	√
The provider will be experienced with simulation	—	√	—
The provider will demonstrate a good level of expertise with the simulation package	√	—	—
The provider will be technically competent	√	—	—
The provider will be knowledgeable about the customer’s industry	—	—	√
The provider will give accurate time estimates for the project	—	√	√
The provider will be well trained in simulation	√	—	—
The provider will be proactive in suggesting improvements to the process	—	—	√
The provider will use simulation regularly and frequently	—	√	—
The provider will have support from expert simulation modellers	√	—	—
The provider will have a good understanding of the problem	—	—	√
The provider will be knowledgeable about the customer’s business	—	—	√
The provider will spend a lot of time up-front planning	—	√	—
The provider will manage the project	—	√	—
The provider will correctly estimate the complexity of the process	—	—	√
The provider will correctly estimate the complexity of the model required	√	—	—
The provider will be able to quickly assimilate all the information required	√	—	—
The provider will have a knowledge of a wide range of disciplines	√	√	—
The provider will employ a formal process for model development	√	—	—
The provider will have experience with similar models	—	√	√
The provider will be able to analyse the customer’s requirements	—	—	√
The provider will be <i>very good</i>	√	√	√
The provider will have some good ideas on how to simplify the model	√	√	—
The provider will have a natural modelling ability	√	√	—
The provider will use reasonable intelligence to carry out the work	√	—	—
The provider will have a methodical and sound approach	—	√	—
The provider will exclude infrequent events from the simulation	√	—	—
The provider will normally be able to solve any modelling problems	√	√	√
The provider will be used to developing very complex models	√	√	—
The provider will understand what is going on in the process	—	—	√
The provider will be able to build models quickly	√	√	—
The provider will know the limitations of the software	—	√	—
The provider will use methods of experimental design	√	—	—
The provider will correctly estimate the amount and precision of the data required	√	√	√
The provider will correctly estimate the amount of work the customer needs to input	√	√	√

Table A3 Common features for the CSF 'Responsiveness'

<i>Statement of success</i>	<i>Common features</i>		
	<i>Benefits for customer</i>	<i>Timescale for delivery</i>	<i>Flexibility</i>
The simulation will provide information which otherwise would not have been available	√	—	—
The objectives of the project will be achieved	√	—	—
The project will deliver a benefit	√	—	—
The provider will adapt to the customer's changing needs as the project progresses	√	—	√
The provider will be able to perform the project at the time the customer requires	—	√	—
The project will provide the results that the customer wants to hear	√	—	√
It will be possible to perform a lot of experiments	—	—	√
There will be time to perform all the experiments desired	—	√	—
The project will be completed quickly	—	√	—
A problem will be solved through the project	√	—	—
There will be mechanisms in place for controlling change to the project	—	—	√
The simulation will enable the customer to make a decision faster	√	√	—
The customer will learn something from the project and so make better decisions	√	—	—
The simulation will provide a selection of alternative courses of action	—	—	√
The simulation will be used a great deal	√	—	√
The provider will respond quickly to any requests	—	√	√
The provider will analyse any of the customer's ideas that are fed back	√	—	√
The simulation will provide a large volume of information	√	—	—
The provider will have time to perform the simulation project	—	√	—
The reports will be timely	—	√	—
The provider will ensure that the customer's requirements are reflected in the model	√	—	—
The provider will be flexible (willing to meet the customer half-way)	—	—	√
Backup support will be provided by the provider's organisation	—	—	√
The simulation will identify where the problem really is	√	—	—
The simulation will force the customer to think about things that had not previously been considered	√	—	—
The provider will help in an appropriate fashion	√	—	—

Table A4 Common features for the CSF 'Involvement'

<i>Statement of success</i>	<i>Common features</i>		
	<i>Continuity of involvement</i>	<i>Active involvement (teamwork)</i>	<i>Involvement of Key stakeholder groups</i>
The customer will be involved throughout the project	√		
Regular meetings will be held between the customer and the provider	Relates to the <i>communication and interaction</i> dimension under <i>regular communication</i>		
The project will be a team effort	—	√	—
The customer will be involved in the validation of the model	√	√	—
The customer will be informed about what contribution he/she needs to make to the project	—	√	—
A review of how the project went will be performed at the end of the project	√	—	—
Experiments will be performed during meetings with the customer	√	—	—
The customer will be able to perform experiments himself/herself	√	√	—
The customer will spend a lot of time working on the project	—	√	—
The customer will not become too involved in the project and its detail	—	—	—
The customer will buy-in to each stage of the project	—	√	—
Discussions will start at the beginning of the project	√	—	—
The provider will focus the customer on the task in hand	—	—	—
There will be several detailed walkthroughs of the model with the customer	√	√	—
The project team will be involved in verifying all the data	—	√	—
The equipment suppliers (eg machinery) will be involved in the project	—	—	√
The provider will understand the level of the customer's simulation knowledge and will work to that level	—	√	—
Experts in the facility being modelled will be involved in the project	—	—	√
Experts in the facility being modelled will be involved at an early stage in the project	—	—	√
The customer will identify with the simulation as early as possible	√	√	—
Those involved in the project will remain involved throughout	√	—	—
The customer will have input into how the model looks	—	√	—
The customer will be involved in data collection	√	√	—
Potential experiments will be discussed at the beginning of the project	√	—	—

Table A5 Common features for the CSF 'The Customer's organisation'

<i>Statement of success</i>	<i>Common features</i>		
	<i>Organisational support and commitment</i>	<i>Organisational knowledge of simulation</i>	<i>Shared organisational knowledge of problem</i>
Senior management in the customer's organisation will be committed to the project	√	—	—
The customer will be committed to the project	√	—	—
The customer will believe in simulation	√	√	—
The customer's organisation will see the simulation as a necessary part of the wider project	√	√	—
The customer will be able to clearly define the problem being tackled	—	—	√
All involved in the project will be willing to input to the process	√	—	—
The customer will not change the objectives as the project progresses	—	—	√
The customer will clearly define the experiments before the project starts	—	—	√
Simulation will be an accepted technique in the customer's organisation	—	√	—
The plans for the real facility will be fairly concrete before the simulation is started	—	—	√
The customer will have a good knowledge of the facility being modelled	—	—	√
The customer will be supportive and helpful	√	—	—
The customer will not have preconceived ideas about what the simulation will show	—	√	—
The provider will be accepted by those providing data	√	—	—
The customer will understand something of the simulation software	—	√	—
The customer will understand some of the problems the provider might face	—	√	√
Members of the customer's organisation will be available as and when they are needed	√	—	—
The customer will ask for a reasonable number of experiments to be performed	—	√	—
The customer's organisation will have formal procedures in place for requesting a simulation	—	√	—
Senior management in the customer's organisation will be willing to listen and be open to change	√	—	—
The provider will have responsibility and accountability to the customer	—	—	√
The customer will have been designated the task of being involved in the simulation	√	—	—
The management in the customer's organisation will have the foresight to see what simulation can do	—	√	—
There will be a middle-person between the provider and the customer who understands both simulation and the problem	—	√	√
The customer will have the structure for the model documented before work commences	—	√	—
The customer will listen to the results of the simulation	√	—	—
The customer will have sufficient time/resource to collect the data	√	—	—
The customer organisation will commit to the implementation	√	—	—
The customer will initiate the project	√	—	—
The customer will not have preconceived ideas about simulation being the correct technique for the problem being tackled	—	√	—
The customer's expectations will not be too high	—	√	√
The customer will communicate his/her expectations at the beginning of the project	—	—	√
It will be easy to gain access to the customers	√	—	—
The customer will recognise that there are limitations to the model	—	√	—
The customer will spend time interpreting the results	√	—	—
The customer will understand how to use the model	—	√	—

Table A5: *Continued*

<i>Statement of success</i>	<i>Common features</i>		
	<i>Organisational support and commitment</i>	<i>Organisational knowledge of simulation</i>	<i>Shared organisational knowledge of problem</i>
The problem that the customer asks to be tackled by simulation will be manageable	—	—	√
The customer will not think in terms of current practice alone	—	√	—



This work is licensed under a Creative Commons Attribution 3.0 Unported License. The images or other third party material in this article are included in the article’s Creative Commons license, unless indicated otherwise in the credit line; if the material is not included under the Creative Commons license, users will need to obtain permission from the license holder to reproduce the material. To view a copy of this license, visit <http://creativecommons.org/licenses/by/3.0/>

*Received 4 December 2013;
accepted 12 January 2016 after two revisions*