

*Highlights (for review)

Copyright © 2016 Elsevier Ltd. All rights reserved. This manuscript version is made available under the CC-BY-NC-ND 4.0 license <https://creativecommons.org/licenses/by-nc-nd/4.0/> (see: <https://www.elsevier.com/about/policies/sharing>).

- A novel methodology for payback analysis of vacuum insulation panels was proposed
- The methodology considers the variation of techno-economic parameters with time
- Space heating energy and emission savings were calculated
- Longer lifespan vacuum insulation panel achieved a shorter payback period
- Fumed silica VIPs are economically viable for adoption into non-domestic buildings

Energy and economic analysis of Vacuum Insulation Panels (VIPs) used in non-domestic buildings

M. Alam^a, H. Singh^b, S. Suresh^c, D.A.G. Redpath^d

^a Cardiff School of Art and Design, Cardiff Metropolitan University, Cardiff, CF5 2YB, UK.

^b College of Engineering, Design and Physical Sciences, Brunel University, Uxbridge, UB8 3PH, UK.

^c Department of Mechanical Engineering, National Institute of Technology, Tiruchirappalli, 620015, India.

^d Centre for Sustainable Technologies, University of Ulster, Newtownabbey BT37 0QB, UK.

Abstract

The potential savings in space heating energy from the installation of Fumed Silica (FS) and Glass Fibre (GF) Vacuum Insulation Panels (VIPs) were compared to conventional expanded polystyrene (EPS) insulation for three different non-domestic buildings situated in London (UK). A discounted payback period analysis was used to determine the time taken for the capital cost of installing the insulation to be recovered. VIP materials were ranked using cost and density indexes. The methodology of the Payback analysis carried out considered the time dependency of VIP thermal performance, fuel prices and rental income from buildings. These calculations show that VIP insulation reduced the annual space heating energy demand and carbon dioxide (CO₂) emissions by approximately 10.2%, 41.3% and 26.7% for a six storey office building, a two floor retail unit building and a four storey office building respectively. FS VIPs had the shortest payback period among the insulation materials studied, ranging from 2.5 years to 17 years, depending upon the rental income of the building. For GF VIPs the calculated payback period was considerably longer and in the case of the typical 4 storey office building studied its cost could not be recovered over the life time of the building. For EPS insulation the calculated payback period was longer than its useful life time for all three buildings. FS VIPs were found to be economically viable for installation onto non-domestic buildings in high rental value locations assuming a lifespan of up to 60 years.

Keywords: Payback period; Space heating energy savings; Vacuum Insulation Panel (VIP); Fumed Silica; Glass fibre; Non-domestic buildings.

Contents

1 Introduction	2
2 Cost and density indices for VIP types	4
3 Payback period calculation.....	6
4 Details of the non-domestic buildings investigated	9
5 Space heating energy saving potential	10
6 Payback period results.....	12
6.1 Two floor retail unit	12
6.2 Four storey office	15
6.3 Six storey office.....	17
7 Conclusions	19
8 References.....	19

1 Introduction

The combustion of fossil fuels to generate energy is recognised as the major cause of anthropogenic climate change. To mitigate this, the international community has agreed to collectively endeavour to limit global temperature rise to within 1.5°C above pre-industrial levels by reducing emissions of greenhouse gases through the use of cleaner energy sources and increased energy efficiency [1]. In 2013, emissions from space heating energy use in UK buildings accounted for 98 million tonnes of carbon dioxide (CO₂), constituting 17% of total UK greenhouse gas emissions [2]. Energy efficiency requirements for UK buildings are continuously improved through stricter stipulations in the building regulations. The aim is to reduce overall UK CO₂ emissions by at least 80% from the 1990 level by 2050 as set in the Climate Change Act 2008 [3]. With over 60% of the energy consumed in the buildings used for space heating [4], the development of building fabrics with substantially improved insulation properties are essential for the UK to achieve its long term carbon reduction goals.

To reduce heat losses from building fabric using conventional insulation products, such as Expanded Polystyrene (EPS), will require prohibitively thick layers, which may not be feasible in existing or even new buildings. Alternatively, thinner layers of advanced insulation products, such as VIPs, could be used due to their thermal resistivity being 5-8 times greater than conventional insulation [5,6,7,8,9].

A VIP is a composite rigid sheet comprising an evacuated (pressure ≤ 0.5 mbar) inner core board laminated inside an outer barrier envelope [10]. VIPs can be installed on opaque building surfaces (externally or internally) and on hot water storage cylinders to improve their thermal resistance. For façade applications, transparent insulation materials [11,12] are under development.

In 2014, only 10% of the VIPs production were used for insulating buildings, refrigeration and transportation industry were the main users of this technology consuming 30% and 60% of the annual production of VIPs respectively [13]. The uptake of VIPs for building applications has not achieved its full potential due to their high installed cost compared with other insulation products. Presently, VIP use can only be justified in a few construction scenarios; for example, heritage and narrow city centre buildings with unique architectural features or limited usable indoor space. The high cost of VIPs is due to the materials required for manufacturing, necessitating the development of lower cost core and envelope materials with similar or improved thermal insulation properties than those currently in use. Previous research on VIP core materials has focused mainly on Fumed Silica (FS) due to its excellent thermo-physical properties [14]. But, FS is expensive and several studies, as shown in table 1, have proposed alternative core materials.

Table 1. Core materials other than FS and glass fibre reported in previous studies

Core Material	Initial Centre of Panel Conductivity ($\text{Wm}^{-1}\text{K}^{-1}$)	Reference
Melamine-formaldehyde Fibre fleece	0.0023	[15]
Expanded perlite and fumed silica composite	0.0074	[16]
Open pore melamine formaldehyde foam	0.006	[17]
Granular Silica	0.014	[18]
Phenolic foam	0.005	[19]
Fumed silica/rice husk ash hybrid mixture	0.0055-0.0062	[20]

Published research on the materials listed in table 1 have primarily focused on the thermo-physical performance of VIPs neglecting the potential for energy savings and the associated economic analysis. Cho et al. [21], Alam et al. [10] and Tenpierik [22] published economic analysis of VIPs but only considered domestic building applications. Kucukpinar et al. [11] demonstrated that VIP insulation reduced annual energy consumption by 25% for two mock-up rooms situated in Poland and Spain. Mujeebu et al. [23] predicted using ECOTECT software that VIPs fixed to the roof and external walls would reduce annual energy consumption by 0.62% for a single office building and 0.79% for a multi-storey office building compared to EPS.

Clearly, the energy saving potential of VIPs is dependent on the type of building and its location (climatic and economic factors) thus further research to clarify the energy saving potential of VIPs is required. Mujeebu et al. [24] predicted the simple payback period of VIPs to be 5.3 times longer than that of EPS if installed in a multi-storey office building in Saudi Arabia. The, simple payback method used by Mujeebu et al. [24], did not consider the impact on energy savings from the deterioration of the VIP thermal performance with time, the economic value of space savings due to thinner section of VIPs and the varying time value of money. These factors significantly influence payback periods and must be considered to enable a more accurate calculation to be made of the cost effectiveness of VIPs compared to other insulation materials.

The objective of this paper is to calculate the payback period of VIPs through a discounted economic analysis whilst simultaneously accounting for the other identified factors which affect it. To investigate this, an energy saving and economic payback analysis of FS and GF VIPs installed on three representative non-domestic buildings situated in London (UK) was undertaken. A novel methodology which considered the change of VIP thermal performance over time, fuel price variability, heating system efficiency degradation with time and the economic value of space savings realised from using comparatively thinner VIPs was developed. No such information currently exists in the peer reviewed literature. Cost and density indices linked to the thermal conductivity of FS and GF VIPs were calculated. The discounted payback period for VIPs was then compared to that of conventional expanded polystyrene (EPS) insulation, to assess the cost effectiveness of each.

2 Cost and density indices for VIP types

VIPs are classified by the type of main core materials used in their manufacturing, which includes FS, expanded perlite (EP), FS and EP composites (FS+EP), glass fibre (GF) and polyurethane foam (PU) along with opacifiers, getters and desiccants. VIPs with diverse core materials have different expected life times, which determines their suitability for specific applications. The cost of VIP core materials can account for 45% of the total cost.

The price, initial (measured at the time of manufacturing) centre of panel thermal conductivity (λ) design thermal conductivity (thermal conductivity including the thermal bridging effect and ageing effect) and density of VIPs made with different core materials are shown in table 2.


Table 2. Cost and main physical properties of different types of VIPs

Type of VIP	Cost (£m ⁻³)	Initial centre of panel λ (Wm ⁻¹ K ⁻¹)	Design λ (Wm ⁻¹ K ⁻¹)	Density (kgm ⁻³)	Service Life (years)
VIP Fumed silica (FS)	2365	0.0043 ^a	0.008	180 ^a	60 ^a
VIP Fumed silica& Expanded perlite composite (FS+EP)	2152	0.0076 ^b	0.0116	330 ^b	30
VIP Expanded perlite (EP)	1809	0.013	0.017	290	20
VIP Polyurethane (PU)	2000	0.009 ^a	0.013	65 ^a	15 ^a
VIP Glass fibre (GF)	1464	0.0028 ^c	0.0068	200 ^c	10 ^c

147 ^a va-Q-tec AG (2016) [25]; ^b Alam et al.(2014) [16]; ^c Di et al.(2013) [26]

148 Cost and density indices for the materials shown in table 2 were derived. The cost
 149 index, was the product of cost and initial centre of panel thermal conductivity. The
 150 density index, was the product of density and the initial centre of panel thermal
 151 conductivity. VIPs with smaller values of these indices are more desirable. Figure 1
 152 shows the calculated cost and density index of the materials listed in table 2.

153

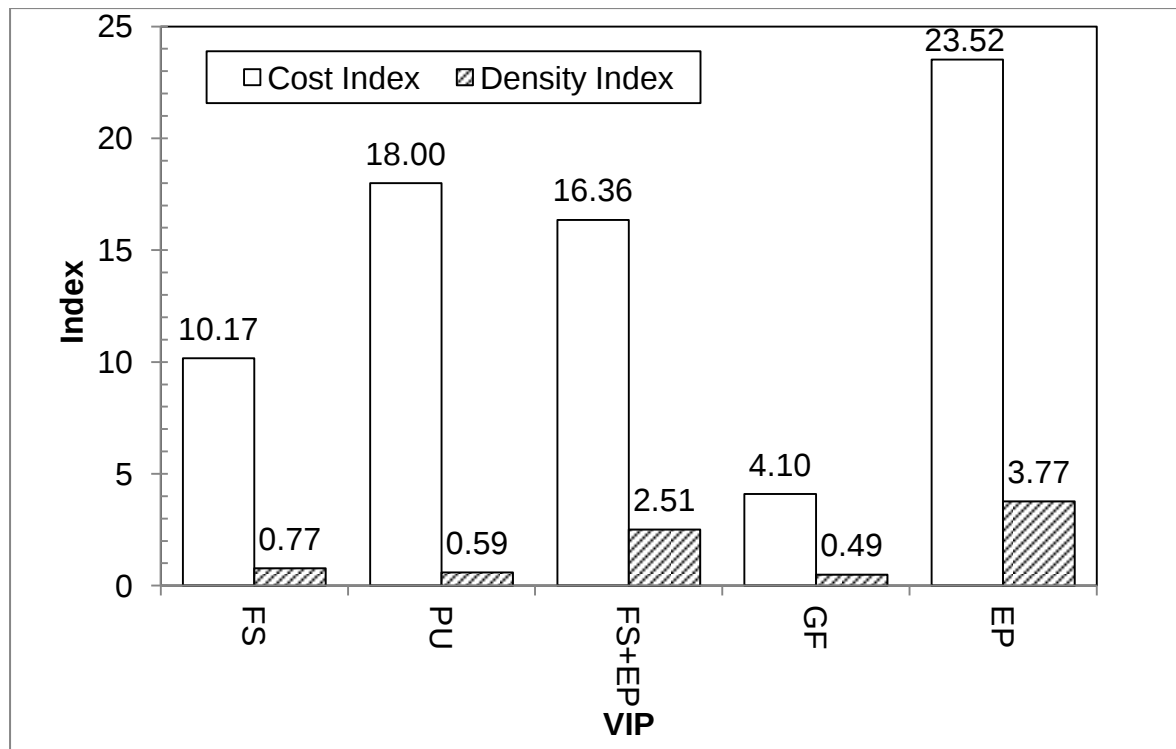

154

155

Figure 1. Cost and density index of different types of VIPs

Calculating the cost and density index of VIPs allows the relationship between cost and thermo-physical properties to be observed. From figure 1, GF VIP returned the smallest cost index of 4.10 (best performance) followed by FS, FS+EP composite, PU and EP in that order. Comparing the values of density index shown in figure 1, GF VIPs have the lowest calculated value of 0.49, whilst EP VIPs the highest value of 3.77. FS VIP, with a comparatively lower initial thermal conductivity and density, has 2.4X and 1.5X lower cost and density indices respectively than that of FS+EP composite VIP. FS VIP had a calculated cost and density index 2.48X and 1.57X greater respectively than GF VIPs. However, GF VIPs have a significantly shorter life time, of 10-12 years, compared to the lifetime of 50-60 years expected for FS VIPs.

3 Payback period calculation

The discounted payback period is the time taken for an investment, such as the installation of VIPs, to repay the initial capital through the realised savings taking into account fuel cost savings and other accrued benefits. It is a critical factor in the choice of the most cost effective insulation and was quantified by calculating the Profit on investment (*POI*) for each scenario investigated using equation (1). The *POI* accounts for present values of energy savings, space savings and present value of the capital costs. The payback year of any investment is reached when the *POI* equals zero for the very first time [27]. In case of commercial buildings, space savings due to thinner VIP sections would provide additional revenue for building owners, and is included in equation (1):

$$POI = \left[\frac{86400 \times HDD \times \Delta L \times C_F}{H_v \times \left(\frac{\eta_i - x \times n}{100} \right)} \times \frac{1}{(1+r)^n} \right] + \left[Y \times \Delta d \times 2 \{ (L_f + \Delta d) + (W_f + \Delta d) \} \times \frac{1}{(1+r)^n} \right] - [C_{Mt} + C_M + C_I] \quad (1)$$

where

C_{Mt} is the material cost of VIP core and envelope (£)

C_M is the manufacturing cost of VIP (£)

C_I is the installation cost of VIP (£)

HDD is the heating degree days (°C days)

C_F is the cost of fuel (£m⁻³)

H_v is the calorific value of fuel (Jm⁻³)

η_i is the initial thermal efficiency of the heating system, boiler (%)

x is the annual rate of decrease of thermal efficiency of heating boiler (%)

ΔL is the difference of total building transmission heat loss coefficient (L) before and after applying insulation (WK⁻¹)

n is the number of year

r is the annual discount rate (% fraction)

Y is the annual rental value (£m⁻²)

195 A_s the floor area saved (m^2)
 196 F is the number of floors
 197 Δd is the difference in thickness of conventional insulation and VIP insulation (m)
 198 L_f is the length of internal floor (m)
 199 W_f is the width of the internal floor (m)

200

201 Total building transmission heat loss coefficient (L) is described as equation (2)

$$L = \sum_{i=1}^{i=N} U_i(t) A_i + \frac{I(\rho c_p)_{air} V}{3600} \quad (2)$$

202 where

203 A_i is the insulated area of the building element i (m^2)

204 U_i is the U-value of the building element i ($Wm^{-2}K^{-1}$)

205 I is the air exchange rate per hour (ach^{-1})

206 V is the internal volume of the building (m^3)

207 $(\rho c_p)_{air}$ is the volumetric thermal capacity of air ($Jm^{-3}K^{-1}$) taken as $1200 Jm^{-3}K^{-1}$.

208 Hence, the equation (2) can be rewritten as

209

$$L = \sum_{i=1}^{i=N} U_i(t) A_i + \frac{IV}{3} \quad (3)$$

211

212 In equation (3), term $\frac{IV}{3}$ is the ventilation conductance (WK^{-1}) [28].

213

214 The different parameters used for calculating the discounted payback period analysis
 215 presented in this study are detailed in table 3. The long term price forecast reported
 216 by the UK Department of Energy and Climate Change [29] for natural gas which is
 217 shown in figure 2 and extrapolated for the assumed life time of the buildings under
 218 investigation was used to calculate space heating energy savings

219 The HDD data used to determine energy consumption for space heating was the 5
 220 year average (2011 to 2015) for a base temperature of $15.5^\circ C$ for St. James Park
 221 London [30]. Gas condensing boilers are assumed to suffer from an annual fall in
 222 their thermal efficiency by 0.5% with a useful lifespan of 20 years. The installation
 223 cost was assumed to be the same for all VIP types investigated so was not included
 224 in the calculations.

225

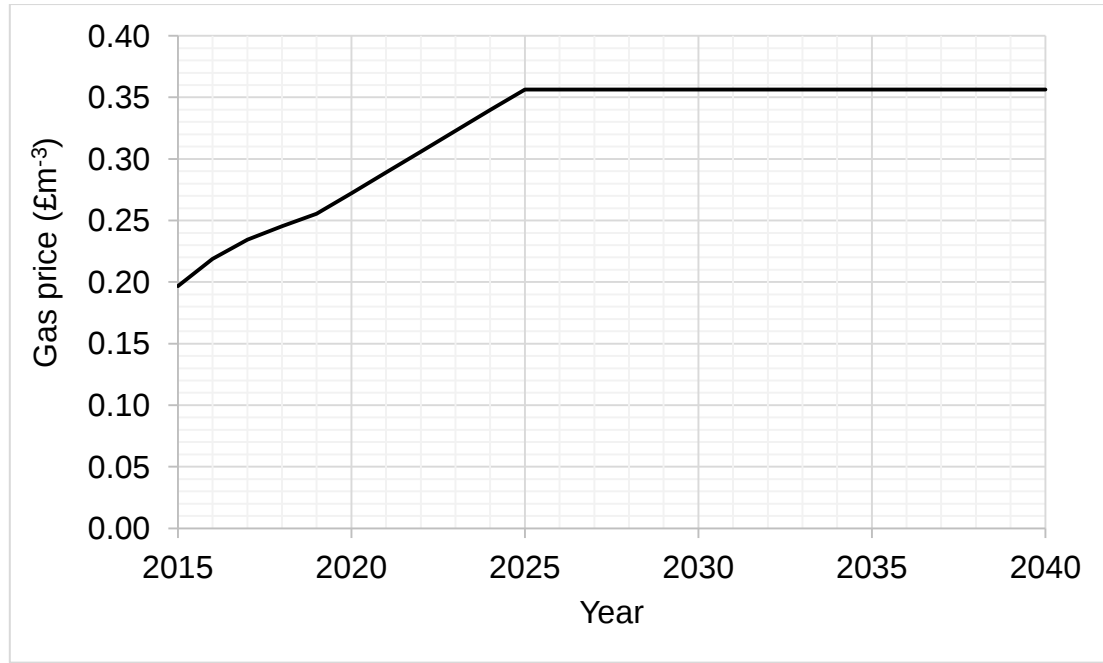


Figure 2. Gas price forecast [29]

Table 3. Parameters used for payback period calculation

Parameters	Description/Value
Fuel	Natural gas
HDD (°Cdays) [26]	1624
Fuel cost, C_{F_i} (£m ⁻³) [25]	0.196
Heating value, H_V , (MJm ⁻³)	39.5
Initial heating system efficiency, η_i , (%)	90
Annual discount rate, r , (%)	4

The U-value of building elements was determined by calculating the thermal resistances of the constituent material layers and adjacent air layers as shown in equation (4) [28]. The thermal resistance of any building material layer is the ratio of its thickness to thermal conductivity.

$$U = \frac{1}{R_{si} + (\sum R_e) + R_{sx}} \quad (4)$$

where

U is the thermal transmittance (Wm⁻²K⁻¹)

R_{si} is the internal surface resistance (m²KW⁻¹)

R_e is the thermal resistances of a material layer (m²KW⁻¹)

R_{sx} is the external surface resistance (m^2KW^{-1})

The thermal conductivity of a VIP decreases with time as pressure inside VIP increases due to outgassing, or via penetration to the interior by atmospheric air and moisture. Degradation in VIP performance was accounted for when calculating the U-value of the building elements insulated with VIPs, by modifying equation (4) as shown in equation (5).

$$U(t) = \frac{1}{R_{si} + (\sum R_e) + R_{vip}(t) + R_{sx}} \quad (5)$$

where

$R_{vip}(t)$ is the time dependent thermal resistivity of the VIP layer in a building element and calculated using equation (6):

$$R_{vip}(t) = \frac{d_{vip}}{\lambda_{vip}(t)} \quad (6)$$

where d_{vip} is the thickness and $\lambda_{vip}(t)$ the time dependent thermal conductivity of VIP.

For the U-value calculations used by this research, design thermal conductivity values of $0.008 \text{ Wm}^{-1}\text{K}^{-1}$, $0.007 \text{ Wm}^{-1}\text{K}^{-1}$ and $0.035 \text{ Wm}^{-1}\text{K}^{-1}$ were used for FS VIP, GF VIP and EPS respectively. For FS VIPs and GF VIPs the annual increase in thermal conductivity was assumed as $0.0001 \text{ Wm}^{-1}\text{K}^{-1}\text{a}^{-1}$ [31] and $0.0018 \text{ Wm}^{-1}\text{K}^{-1}\text{a}^{-1}$ respectively [26].

4 Details of the non-domestic buildings investigated

The opaque elements (i.e. walls, floor and roof) of three different types of commercial (non-domestic) buildings situated in London (UK); a two floor retail unit, a four storey office and a six storey office were considered for retrofitting with VIPs or EPS.

The two floor retail unit building is representative of 10% of the current retail building stock in the UK by age of construction (1989-90) and 13% by floor area ($250-500 \text{ m}^2$) [32]. The four storey office building type accounts for 9% of the office building stock in the UK by age of construction (1981-85) and 20% by floor area ($2500-10,000 \text{ m}^2$) [32]. The six storey office building accounts for 11% of the office building stock in the UK by age of construction (1986-90) and 20% by floor area ($2500-10,000 \text{ m}^2$) [32].

Table 4 shows the relevant details for each of the buildings investigated. Each building was assumed as refurbished to current building regulation standards by applying internal insulation on all opaque elements achieving U-values of $0.30 \text{ Wm}^{-2}\text{K}^{-1}$, $0.18 \text{ Wm}^{-2}\text{K}^{-1}$ and $0.25 \text{ Wm}^{-2}\text{K}^{-1}$ for wall, roof and floor respectively [33]. Table 4 shows U-values before and after applying insulation on all buildings considered in the study along with their thickness values. It was assumed that VIPs covered 95% of the opaque elements with phenolic foam insulation covering the remaining 5%. The thermal conductivity of the Phenolic foam used was assumed as of $0.020 \text{ Wm}^{-1}\text{K}^{-1}$.

Table 4. Details of buildings studied and U-values before and after the application of insulation

Building	Parameter	Wall	Floor	Roof
Retail Unit	Existing U-value ($\text{Wm}^{-2}\text{K}^{-1}$)	0.65	0.46	0.96
	U-value after applying insulation ($\text{Wm}^{-2}\text{K}^{-1}$)	0.30	0.25	0.18
	FS VIP Thickness (mm)	25	25	65
	GF VIP Thickness (mm)	40	40	110
	EPS Thickness (mm)	60	65	155
4 Storey Office	Existing U-value ($\text{Wm}^{-2}\text{K}^{-1}$)	0.65	0.30	0.87
	U-value after applying insulation ($\text{Wm}^{-2}\text{K}^{-1}$)	0.30	0.25	0.18
	FS VIP Thickness (mm)	30	10	65
	GF VIP Thickness (mm)	40	20	110
	EPS Thickness (mm)	74.5	20	155
6 Storey Office	Existing U-value ($\text{Wm}^{-2}\text{K}^{-1}$)	0.44	0.30	0.37
	U-value after applying insulation ($\text{Wm}^{-2}\text{K}^{-1}$)	0.30	0.25	0.18
	FS VIP Thickness (mm)	15	10	40
	GF VIP Thickness (mm)	25	20	65
	EPS Thickness (mm)	40	25	100

5 Space heating energy saving potential

The potential space heating energy savings and associated reduction in CO_2 emission from using VIP insulation in all three types of buildings (described in table 4) were calculated. The annual space heating energy saving (E_A) for any year (n) was calculated using equation (7).

$$E_A = \frac{86400 \times HDD \times \Delta L}{H_v \times \left(\frac{\eta_i - x \times n}{100} \right)} \quad (7)$$

The building transmission heat loss coefficient (L) incorporates the U-values of all building elements. In the case of applying VIP insulation the U-value varies with time and can be calculated using equations (5) and (6). The time dependent U-values of the wall, floor and roof of the retail unit building insulated with VIPs is shown in figure 3.

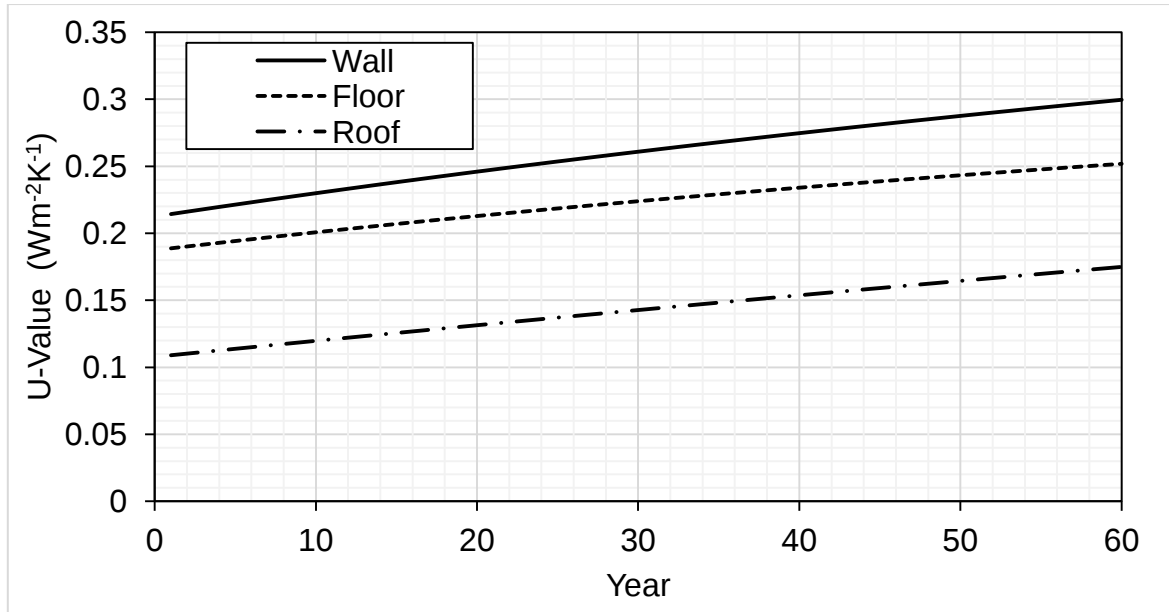


Figure 3. Time dependent U-values of VIP insulated wall, floor and roof of the two floor retail unit building studied

Applying VIP insulation reduced the U-value of building elements, as shown in table 4, saving space heating energy. The energy saved over the assumed 60 year life time of the three buildings considered is shown in figure 4.

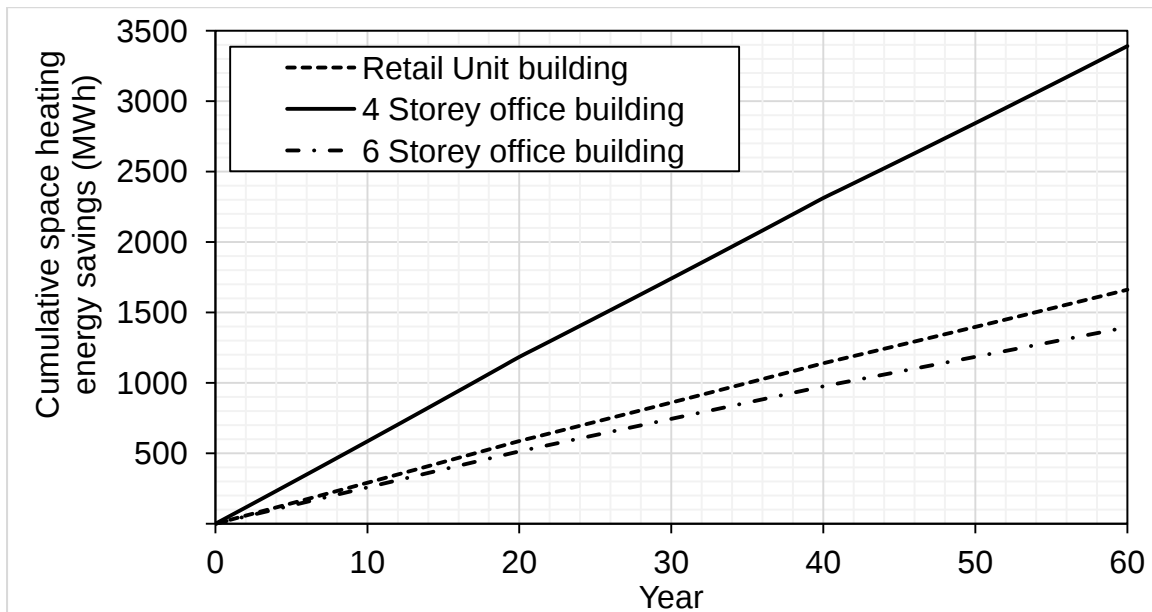


Figure 4. Cumulative space heating energy savings of the VIP insulated buildings studied

Using the parameters outlined previously in table 4 over the assumed building life span of 60 years, installing VIPs would reduce the energy used for space heating by 1395.3 MWh, 1661.2 MWh and 3391.6 MWh for the six storey office building, the retail unit building and the four storey office building respectively. The potential

reduction in CO₂ emissions was calculated using a fuel emission factor of 0.18365 kgCO₂/kWh [34] and shown in figure 5. Use of VIPs was calculated to potentially reduce CO₂ emissions by 10.2%, 41.3% and 26.7% respectively for six storey office building, retail unit building and four storey office building.

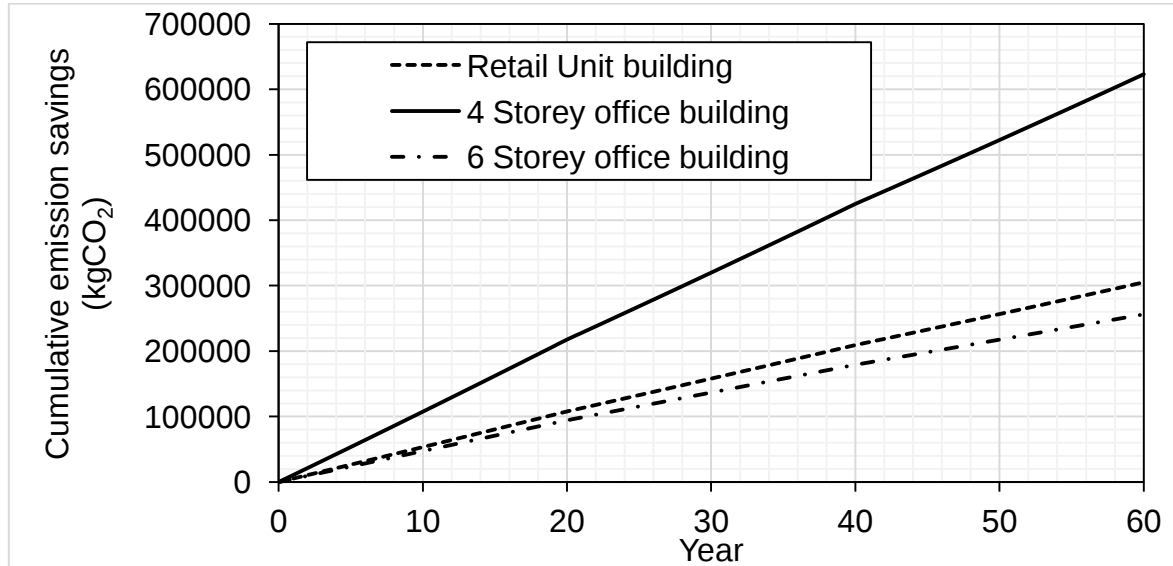


Figure 5. Reduction in CO₂ emissions for three buildings studied

6 Payback period results

A discounted Payback period analysis of FS VIPs, GF VIPs and EPS insulation applied in buildings described in table 4 was carried out using equation (1-6) and the results are presented in section 6.1, 6.2 and 6.3.

6.1 Two floor retail unit

Geometric and thermal features of the buildings studied are shown in table 5. The wall, floor and roof U-values are shown in table 4.

The cost of installing sufficient EPS for achieving current building insulation standards could not be recovered within its lifetime, see figure 6. For EPS, no space saving revenue is possible, which means that investments are solely recovered through fuel cost savings. Also, EPS due to a comparatively shorter service life of 20 years requires replacement three times over an assumed 60 year building life span leading to a higher insulation cost. A life span of 60 years for building was assumed to match the

Table 5. Geometric and thermal features of the buildings considered in this study

Parameter	Two-floor Retail Unit	Four Storey Office	Six Storey Office
Length (m)	15	40	60
Width (m)	15	15	15
Height of each storey (m)	4.5	3.7	3.7
Glazing Area (m ²)	81.0	769.6	1665.0
Glazing U-Value (Wm ⁻² K ⁻¹)	5.38	2.75	1.9
Air infiltration rate (ach)	0.25	0.25	0.25

prescribed life span of VIPs used for buildings in the UK. In the case of VIPs, the additional benefit of commercial space saving can partially offset higher initial insulation costs. The Results of payback period analysis for two different types of VIPs (FS and GF) taking into account

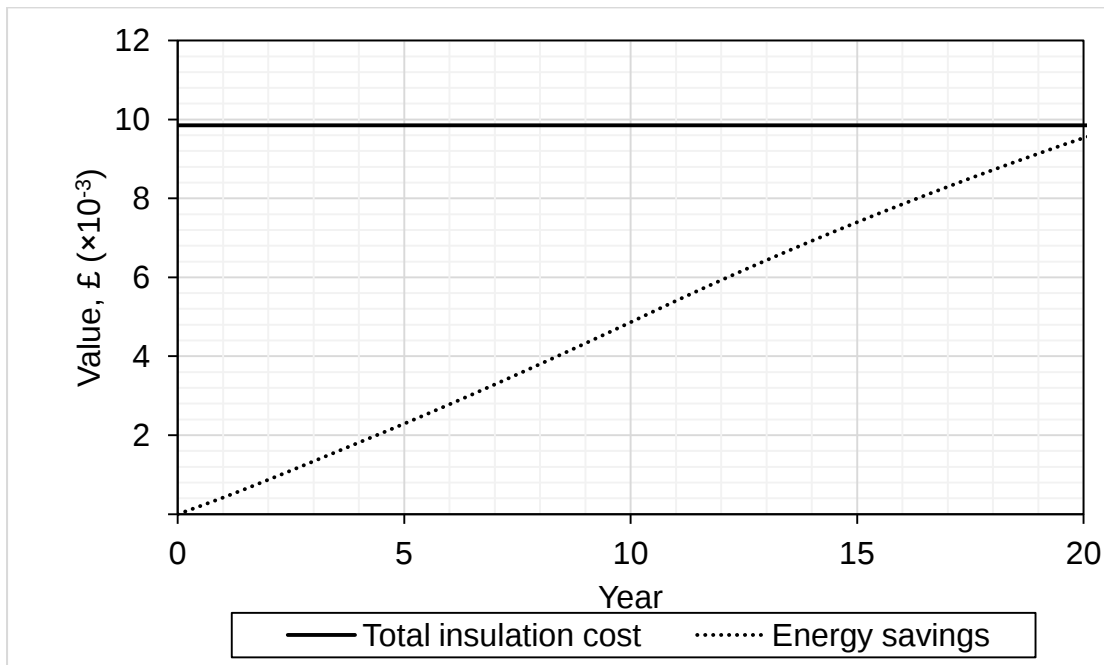


Figure 6. Cost and savings of applying EPS insulation in a retail unit building

the economic potential of space saving with average annual rental value in London (UK) ranging from £1000 m⁻² to £4000 m⁻² [35] is shown in figures 7 and 8 respectively. Figures 7 and 8 demonstrate that the cost of GF VIP insulation with a rental value of £1000 m⁻² cannot be recovered over the life time of the building whereas FS VIP will take only 7 years to recover the investment. This finding can be explained as follows. GF VIP, though costing 1.6 times lesser than FS VIP, must be replaced six times over the life time of the building due to a shorter service life (10 years), compared to that of FS VIP (60 years). As expected, as the rental values increase the payback period for VIP insulation becomes shorter. For rental values of

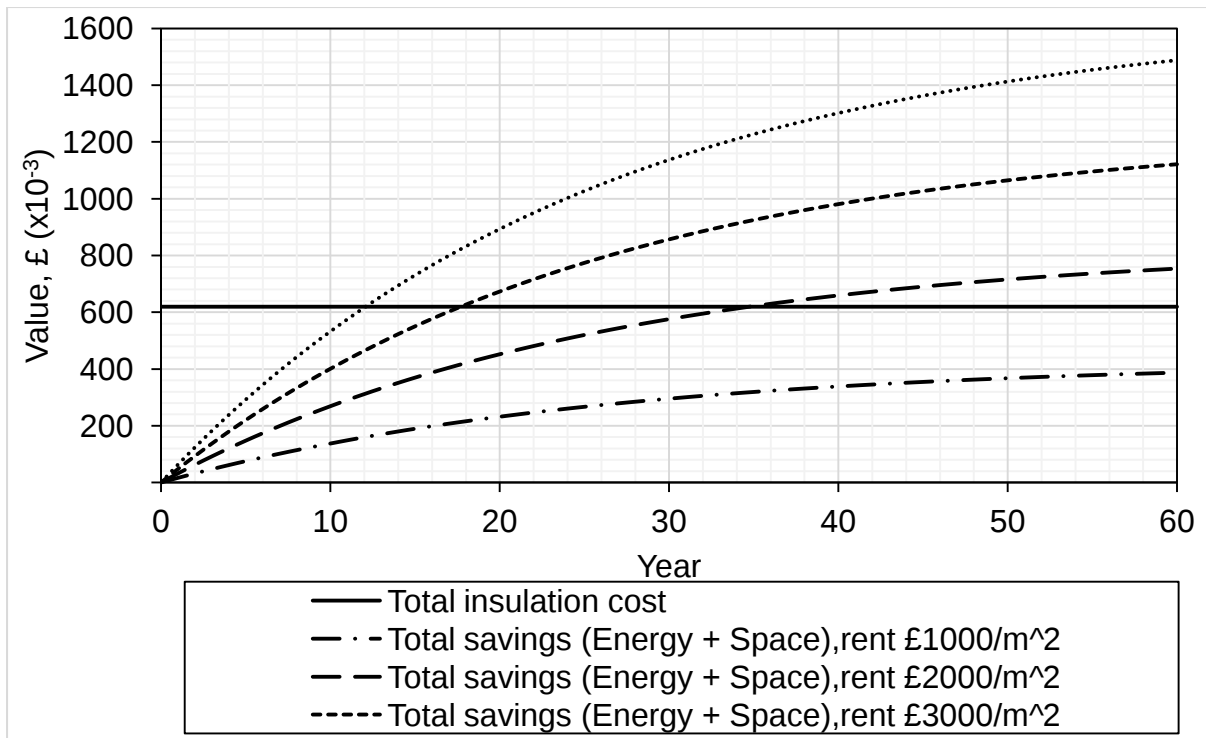


Figure 7. Cost and savings of applying GF VIP insulation in the retail unit building studied

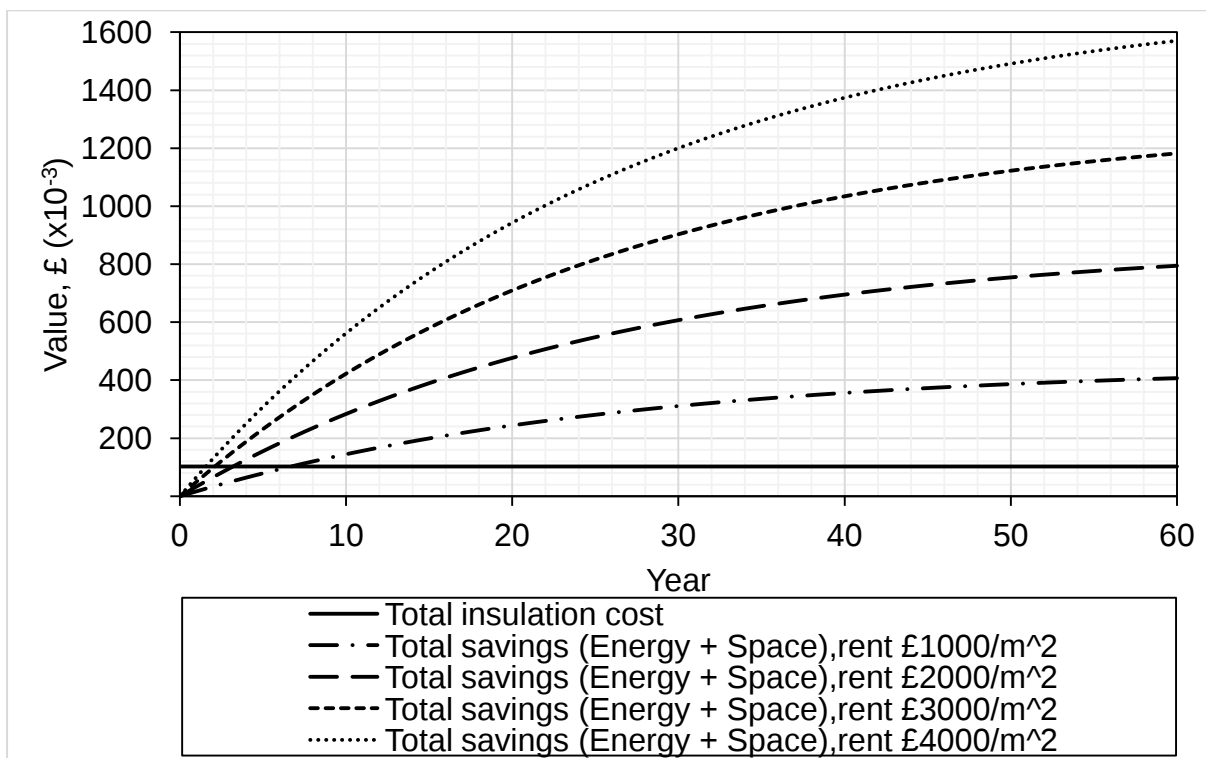


Figure 8. Cost and savings of applying FS VIP insulation in the retail unit building studied

£2000 m⁻² and £3000 m⁻² the discounted payback period was 35 years and 18 years respectively for GF VIP and 4 years and 3 years for FS VIP. For average rental value of £4000 m⁻² payback period of FS VIP becomes approximately 2 years, whereas it is still prohibitively longer (12 years) for GF VIPs.

6.2 Four storey office

Geometric and thermal features of the four storey office are shown in table 4 and table 5. The discounted payback period analysis for the four storey office retrofitted to meet current building insulation standards using EPS insulation, GF VIPs and FS VIPs is presented in figures 9 to 11 respectively.

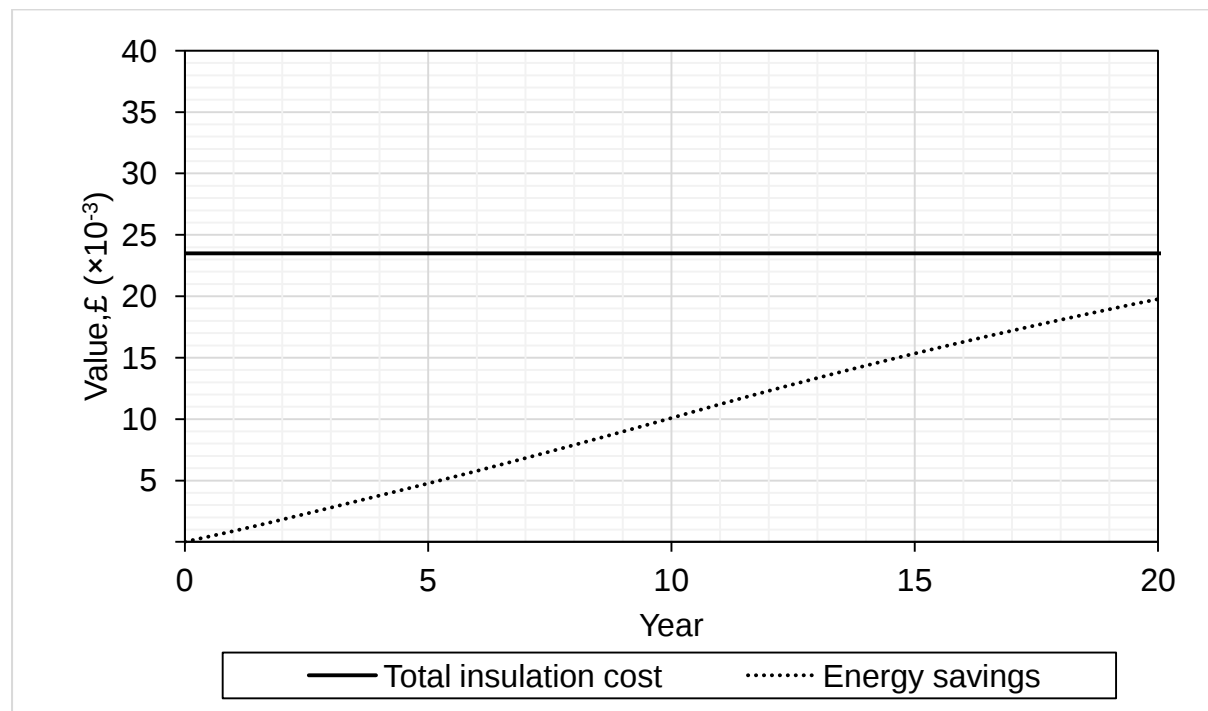


Figure 9. Cost and savings of applying EPS insulation in the 4 storey office building studied

Figure 9 demonstrates that EPS insulation cannot recover the initial capital cost over its life time of 20 years. For GF VIPs the cost of insulation cannot be recovered over the life time of building as shown in figure 10 even with the additional economic benefits from space saving with average annual floor rents ranging from £400 m⁻² to £1000 m⁻² [36]. As discussed in section 6.1, the reason for long payback period for GF VIPs is their short service life (10 years) requiring replacement six times during 60-year life time of the building.

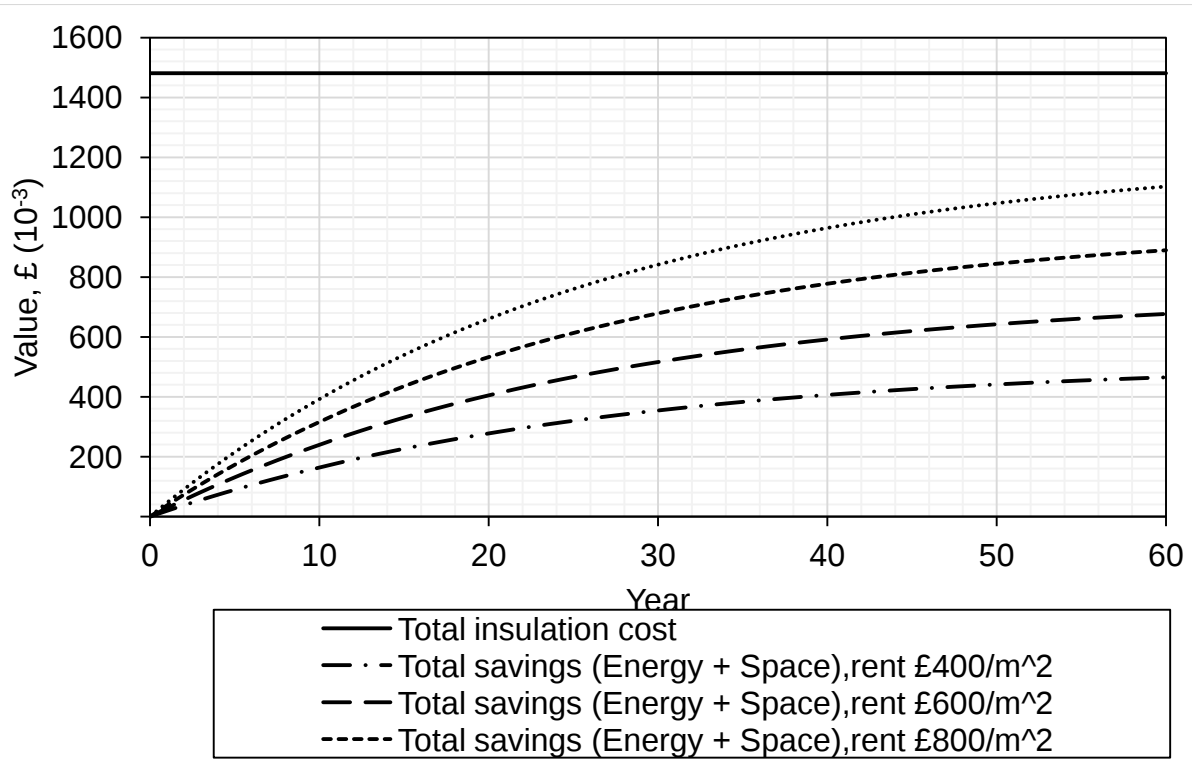


Figure 10. Cost and savings of applying GF VIP insulation in the 4 storey office building studied

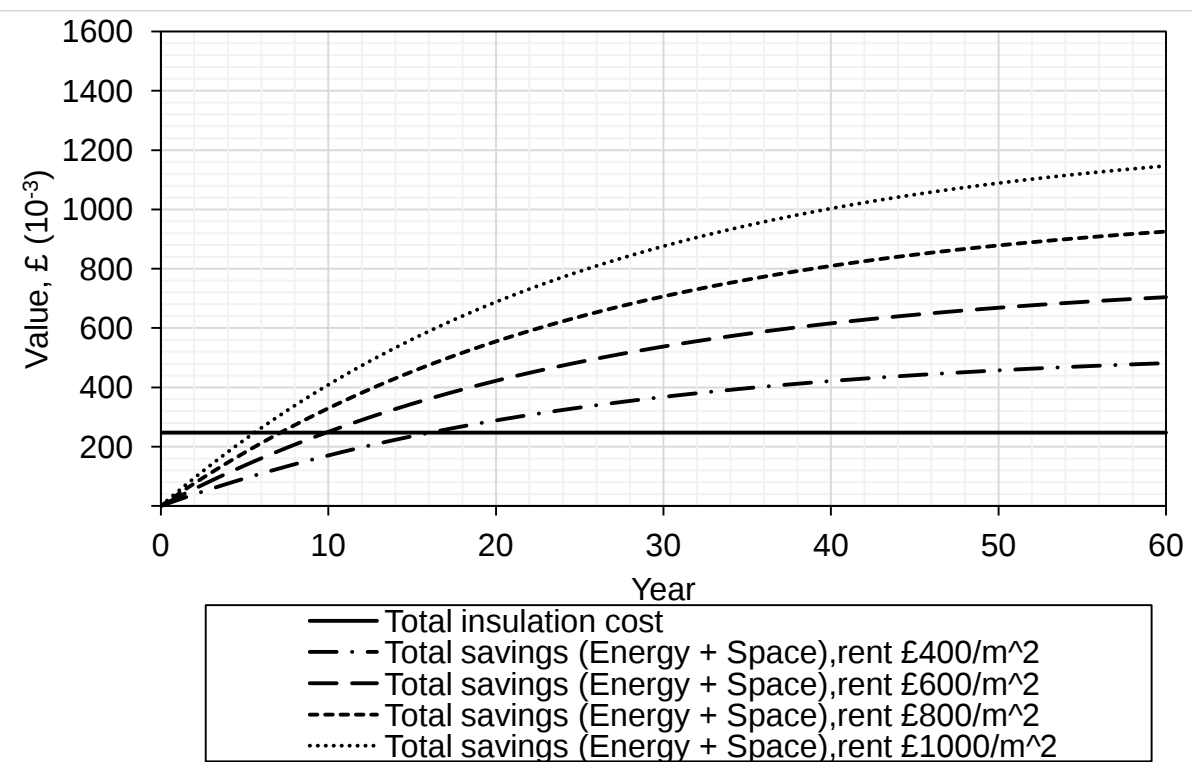


Figure 11. Cost and savings of applying FS VIP insulation in the 4 storey office building studied

From figure 11, it can be seen that upgrading the 4 storey office with FS VIP insulation to comply with current building regulations resulted in payback periods of 17 years, 10 years, 7 years and 6 years for rental values of £400 m⁻², £600 m⁻², £800 m⁻² and £1000 m⁻² respectively.

6.3 Six storey office

Geometric and thermal features of the six storey office are detailed in table 4 and table 5. Results of the discounted payback period analysis for the six storey office building are shown in figures 12 to 14.

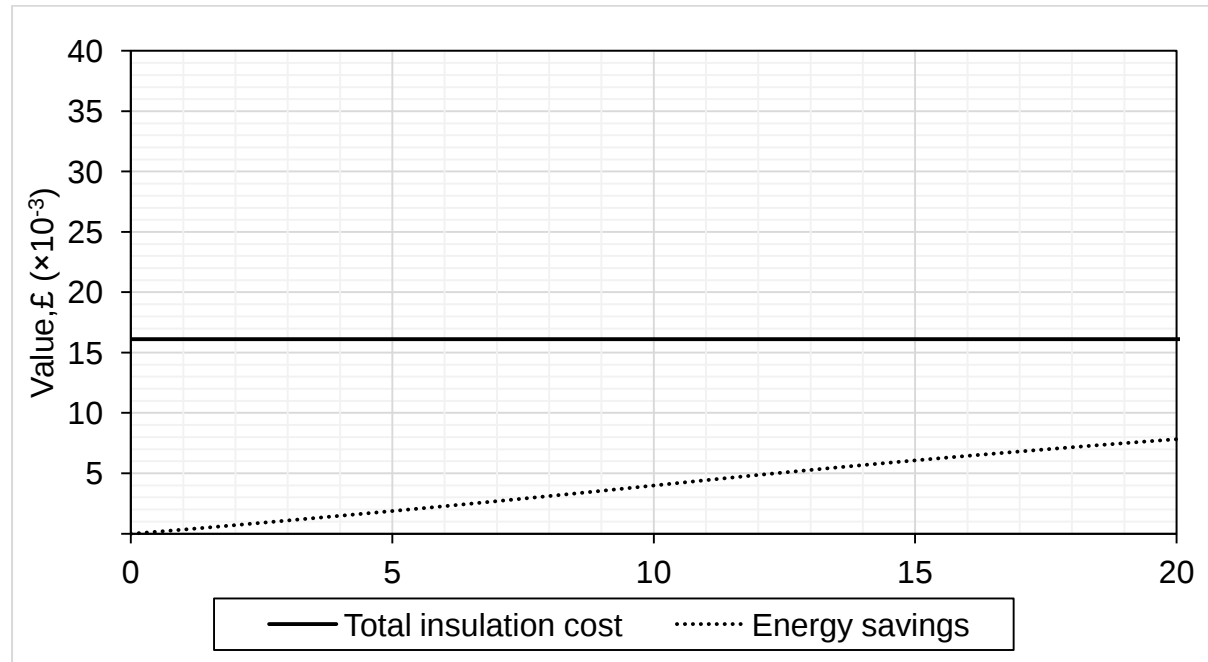


Figure 12. Cost and savings of applying EPS insulation in the 6 storey office building studied

Figure 12 shows that EPS insulation had a discounted payback period longer than its assumed life time of 20 years. It can be seen from figure 13 that in the case of GF VIP, the cost of insulation cannot be recovered with average annual rent of £400 m⁻² and £600 m⁻². For higher annual rents of £800m⁻² and £1000m⁻² payback periods of respectively 39 years and 25 years are predicted. It is clearly observed, from figure 14, that FS VIPs had a shorter payback period than EPS or GF VIPs. FS VIP was found to have a payback period of 7 years, 5 years, 3 year and 2.5 years with rental values of £400 m⁻², £600 m⁻², £800 m⁻² and £1000 m⁻² respectively. These results clearly show that FS VIPs are economically viable to be used in high-rise office buildings despite their higher initial cost and decreasing thermal performance over service life.

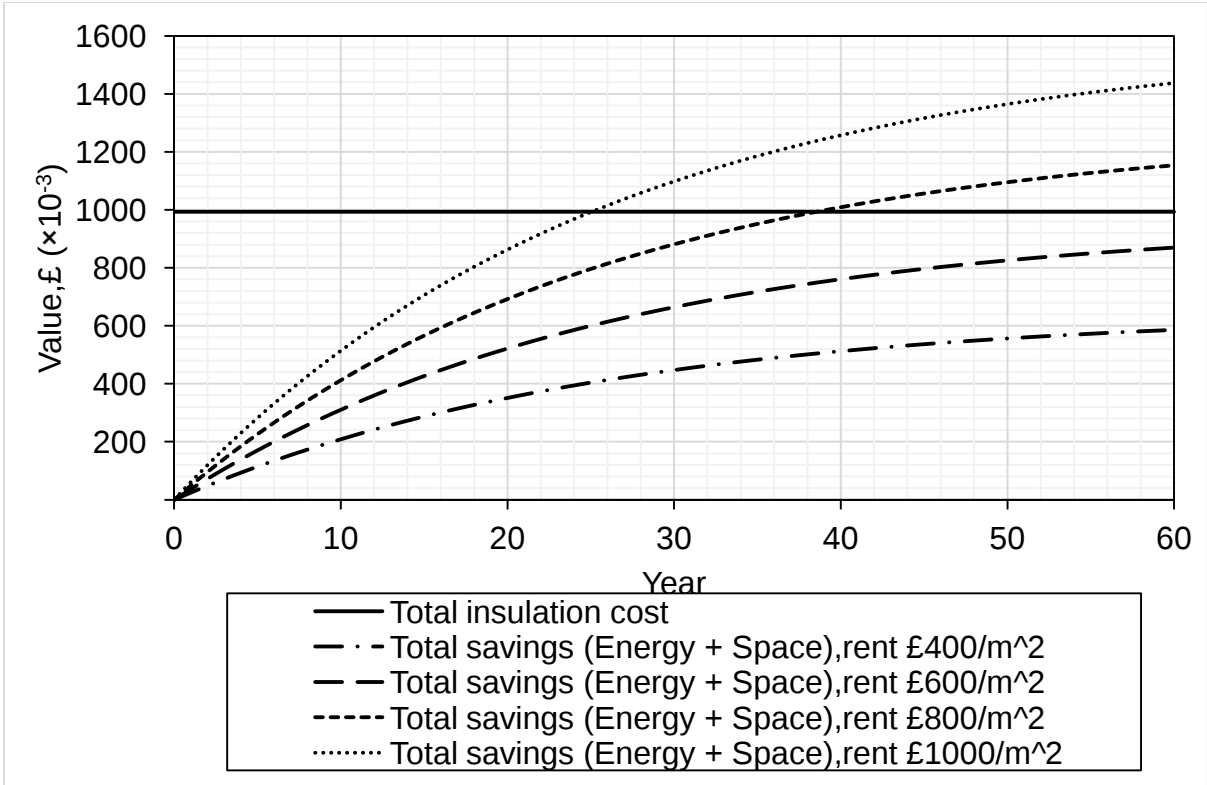


Figure 13. Cost and savings of applying GF VIP insulation in the 6 storey office building studied

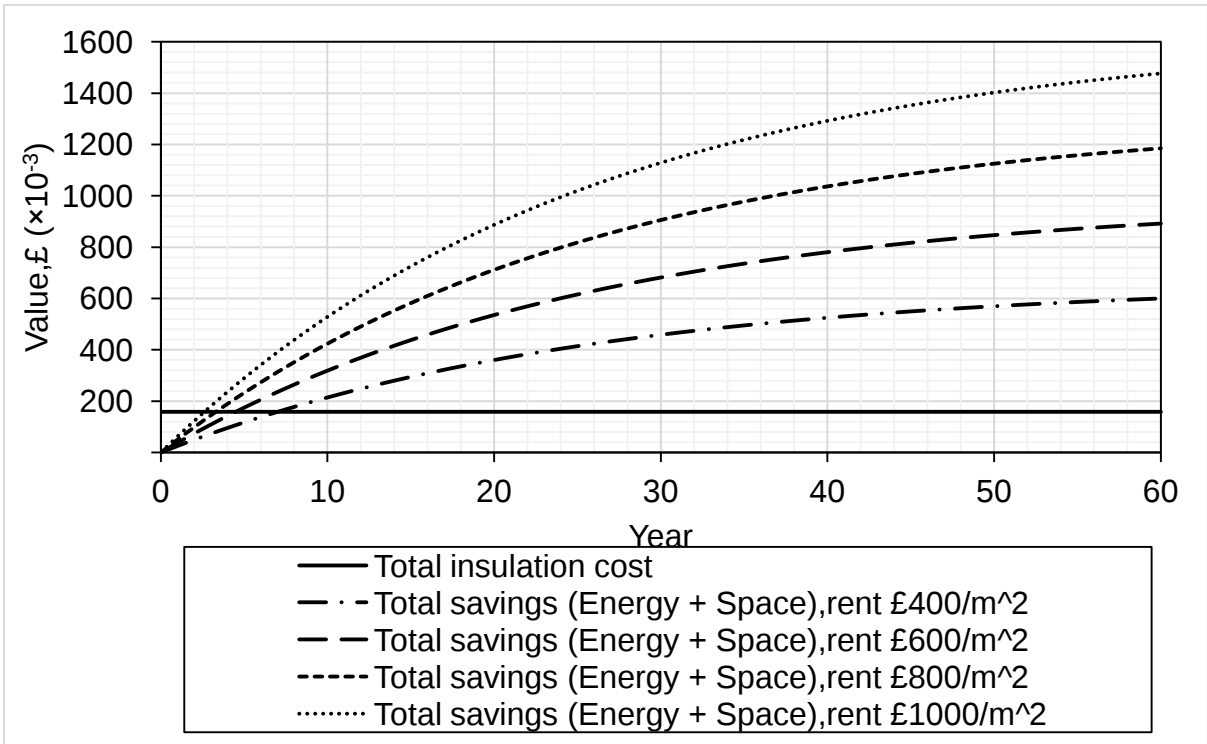


Figure 14. Cost and savings of applying FS VIP insulation in the 6 storey office building studied

7 Conclusions

In this study the energy savings and economic performance of Glass fibre (GF) and Fumed silica (FS) VIPs when used for retrofitting three non-domestic UK buildings to meet current building standards was evaluated and compared to that of conventional insulation, expanded polystyrene (EPS). Installing VIP insulation resulted in space heating energy savings of 1395.3 MWh, 1661.2 MWh and 3391.6 MWh for a six storey office building, a two floor retail unit building and a four storey office building respectively over a life time of 60 years. GF VIP was found to have a higher total cost than FS VIP due to its shorter service life requiring more frequent replacement, once every 10 years. An interesting finding is that EPS insulation cannot even recover its cost over its useful lifetime for all three buildings. Similarly, GF VIPs could not recover their cost for the case of the 4 storey office building. FS VIPs in comparison with EPS insulation and GF VIPs had shorter payback periods due to their longer service life of 60 years. This is despite of FS VIPs being 1.6 times more expensive than GF VIPs. This is a remarkable result establishing the economic viability of using FS VIPs in non-domestic buildings located in high rental value locations around the world, such as London. Longevity has been found to be a critical factor in determining the economic viability of VIPs. It has been shown that despite a higher initial cost a longer lifespan VIP will achieve a shorter payback period. A methodology to predict the payback period for VIP insulation has been proposed. An all-inclusive equation capable of taking into account the change in VIP thermal conductivity with time, variable fuel costs and revenues generated from space savings to predict payback year of VIP insulation was presented. The equation can be easily solved on a spreadsheet to estimate the payback period for VIP insulation for any installation irrespective of application, buildings (domestic or non-domestic), refrigerators, freezers and refrigerated vans among many others.

8 References

- [1] United Nations Framework Convention on Climate Change UNFCCC (2016). Adoption of the Paris Agreement- Proposal by the President (Draft decision -/CP.21), Conference of the Parties, Twenty-first session Paris, 30 November to 11 December 2015. Available from <http://unfccc.int/resource/docs/2015/cop21/eng/l09r01.pdf>, [Accessed on 11 September 2016]
- [2] Committee on Climate Change (CCC) (2013). Fact sheet: Buildings http://www.theccc.org.uk/wp-content/uploads/2014/08/Factsheetbuildings2014_Final1.pdf [Accessed on 19 October 2015].
- [3] Climate Change Act (2008). http://www.opsi.gov.uk/acts/acts2008/pdf/ukpga20080027_en.pdf [Accessed on 19 June 2016].

473 [4] Department of Energy and Climate Change (DECC), (2012). The Future of
 474 Heating: A strategic framework for low carbon heat in the UK,
 475 [https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/48574/](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/48574/4805-future-heating-strategic-framework.pdf)
 476 [4805-future-heating-strategic-framework.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/48574/4805-future-heating-strategic-framework.pdf) [Accessed on 13 August 2016].
 477

478 [5] Brunner S., Simmler H. (2008). In situ performance assessment of vacuum
 479 insulation panels in a flat roof construction. *Vacuum*, 82, 700-707.

480 [6] Alotaibi S.S., Riffat S. (2014). Vacuum insulated panels for sustainable buildings:
 481 a review of research and applications. *International Journal of Energy Research*, 38,
 482 1-19.

483 [7] Kalnæs S.E., Jelle B.P. (2014). Vacuum insulation panel products: A state-of-the-
 484 art review and future research pathways. *Applied Energy*, 116, 355–375.

485 [8] Jang C., Jung H., Lee J., Song T.H. (2013). Radiative heat transfer analysis in
 486 pure scattering layers to be used in vacuum insulation panels. *Applied*
 487 *Energy*, 111, 703-709.

488 [9] Nussbaumer T., Wakili K.G., Tanner Ch. (2006). Experimental and numerical
 489 investigation of the thermal performance of a protected vacuum-insulation system
 490 applied to a concrete wall. *Applied energy*, 83, 841-855

491 [10] Alam M., Singh H., Limbachiya M.C. (2011). Vacuum Insulation Panels (VIPs)
 492 for building construction industry - A review of the contemporary developments and
 493 future directions. *Applied Energy*, 88, 3592 - 3602.

494 [11] Kucukpinara E., Miesbauera O., Carmib Y., Frickec M., Gullbergd L., Erkeye C.,
 495 Caps R., Rochefortg M., Morenoh A.G., Delgadoi C., Koehlj M., Holdsworthk P.,
 496 Klaus Nollera K. (2015). Development of Transparent and Opaque Vacuum
 497 Insulation Panels for Energy Efficient Buildings. *Energy Procedia*, 78, 412 – 417.

498 [12] Sun Y., Wu Y, Wilson R., Sun S. (2016). Thermal evaluation of a double glazing
 499 façade system with integrated Parallel Slat Transparent Insulation Material (PS-TIM).
 500 *Building and Environment*, 105, 69 - 81.
 501

502 [13] Brunner S., Wakili K.G., Stahl T., Binder B. (2014). Vacuum insulation panels for
 503 building applications - continuous challenges and developments. *Energy and*
 504 *Buildings*, 85, 592-596.
 505

506 [14] Singh H., Geisler M., Menzel F. (2015). Experimental investigations into thermal
 507 transport phenomena in vacuum insulation panels (VIPs) using fumed silica cores.
 508 *Energy and Buildings*, 107, 76–83.

- [15] Nemanič V., Žumer M. (2015). New organic fiber-based core material for vacuum thermal insulation. *Energy and Buildings*, 90, 137-141.
- [16] Alam M., Singh H., Brunner S., Naziris C. (2014). Experimental characterisation and evaluation of the thermo-physical properties of expanded perlite - fumed silica composite for effective vacuum insulation panel (VIP) core. *Energy and Buildings*, 69, 442- 450.
- [17] Nemanič V., Zajec B., Žumer M., Figar N., Kavšek M., Mihelič I., (2014). Synthesis and characterization of melamine-formaldehyde rigid foams for vacuum thermal insulation. *Applied Energy*, 114, 320-326.
- [18] Karami P., Afriyie E.T., Norberg P., Gudmundsson K. (2014). A study of the thermal conductivity of granular silica materials for VIPs at different levels of gaseous pressure and external loads. *Energy and Buildings*, 85, 199-211.
- [19] Kim J., Lee J.H., Song T.H. (2012). Vacuum insulation properties of phenolic foam. *International Journal of Heat and Mass Transfer*, 55, 5343-5349.
- [20] Li C.D., Saeed M.U., Pan N., Chen Z.F., Xu T.Z. (2016). Fabrication and characterization of low-cost and green vacuum insulation panels with fumed silica/rice husk ash hybrid core material. *Materials and Design*, 107, 440-449.
- [21] Cho K., Hong Y., Seo J. (2014). Assessment of the economic performance of vacuum insulation panels for housing projects. *Energy and Buildings*, 70, 45-51.
- [22] Tenpierik M.J. (2009). Vacuum insulation panels applied in building constructions (VIP ABC). Ph.D. Thesis, Delft University of Technology, Delft, Netherlands.
- [23] Mujeebu M.A., Ashraf N., Alsuwayigh H.A. (2016a). Effect of nano vacuum insulation panel and nanogel glazing on the energy performance of office building. *Applied energy*, 173, 141-151.
- [24] Mujeebu M.A., Ashraf N., Alsuwayigh H.A. (2016b). Energy performance and economic viability of nano aerogel glazing and nano vacuum insulation panel in multi-story office building. *Energy*, 113, 949-956.
- [25] va-Q-tec AG (2016). <http://www.va-q-tec.com/en/products-industries/construction/products.html> [Accessed on 19 August 2016].

- [26] Di X., Gao Y., Bao C., Hu Y., Xie Z. (2013). Optimization of glass fiber based core materials for vacuum insulation panels with laminated aluminum foils as envelopes. *Vacuum*, 97, 55-59
- [27] Dylewski R., Adamczyk J. (2012). Economic and ecological indicators for thermal insulating building investments. *Energy and Buildings*, 54, 88–95.
- [28] The Chartered Institution of Building Services Engineers (CIBSE) (2015). *Environmental design-CIBSE Guide A*. Eighth edition; The Chartered Institution of Building Services Engineers, London.
- [29] Department of Energy and Climate Change (DECC) (2015). DECC 2015 Fossil Fuel Price Assumptions.
https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/477958/2015_DECC_fossil_fuel_price_assumptions.pdf [Accessed on 17 August 2016].
- [30] <http://www.degreedays.net/> [Accessed on 17 August 2016].
- [31] Simmler H, Brunner S. (2005). Vacuum insulation panels for building application: Basic properties, aging mechanisms and service life. *Energy and Buildings*, 37, 1122- 1131.
- [32] Pout C., Moss S. and Davidson P. J. (1998). *Non-domestic buildings energy fact file*. 1-86081-205-8, BRE Press.
- [33] *Building Regulations* (2010). Approved Document L1A: Conservation of fuel and power in new dwellings), London. NBS
- [34] Department for Business, Energy & Industrial strategy (2016). 2016 Government GHG Conversion Factors for Company Reporting: Methodology Paper for Emission Factors.
https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/553488/2016_methodology_paper_Final_V01-00.pdf [Accessed on 24 September 2016].
- [35] Colliers International (2014). *Research & Forecast Report UK GB Retail Report Autumn 2014*.
- [36] Find a London Office (2016). *London Office Rent: Our Definitive Rental Guide – Updated for 2016 Q2*. <https://www.findalondonoffice.co.uk/toolbox/rental-guide/> [Accessed on 21 August 2016].

1 **Energy and economic analysis of Vacuum Insulation Panels (VIPs)**
2 **used in non-domestic buildings**

3 M. Alam^a, H. Singh^b **and**, S. Suresh^c, D.A.G. Redpath^d

5 ^a Cardiff School of Art and Design, Cardiff Metropolitan University, Cardiff, CF5 2YB,
6 UK.

7 ^b College of Engineering, Design and Physical Sciences, Brunel University,
8 Uxbridge, UB8 3PH, UK.

9 ^c Department of Mechanical Engineering, National Institute of Technology,
10 Tiruchirappalli, 620015, India.

13 ^d Centre for Sustainable Technologies, University of Ulster, Newtownabbey
14 BT37 0QB, UK.

16 **Abstract**

17 ~~Payback period and~~The potential savings in space heating energy ~~saving analysis~~
18 ~~from the installation of fumed silica~~Fumed Silica (FS) and Glass ~~fibre~~Fibre (GF)
19 Vacuum Insulation Panels (VIPs) ~~when used in three distinct non-domestic buildings~~
20 ~~has been performed and results were~~ compared ~~with that of~~ conventional
21 expanded polystyrene (EPS) insulation. ~~for three different non-domestic buildings~~
22 ~~situated in London (UK). A discounted payback period analysis was used to~~
23 ~~determine the time taken for the capital cost of installing the insulation to be~~
24 ~~recovered.~~ VIP materials ~~have been~~were ranked ~~on the basis of~~using cost index and
25 density index. ~~Payback period indexes.~~ The methodology ~~developed is capable of~~
26 ~~taking into account of the~~ Payback analysis carried out considered the time
27 dependency of VIP thermal performance, fuel prices and rental income from
28 buildings. ~~Calculations have shown~~These calculations show that VIP insulation ~~can~~
29 ~~reduced~~reduced the annual space heating energy demand and carbon dioxide (CO₂)
30 emissions by approximately 10.2%, 41.3% and 26.7% ~~respectively~~ for ~~a~~ six storey
31 office building, ~~a~~ two floor retail unit building and ~~a~~ four storey office building. ~~Fumed~~
32 ~~silica respectively.~~ FS VIPs ~~were found to have had~~ the shortest payback period
33 among the insulation materials studied. ~~It ranged,~~ ranging from 2.5 years to 17
34 years, depending upon the rental income of the building. For GF VIPs ~~the calculated~~
35 payback period ~~is was~~ considerably longer and in the case of ~~at the~~ typical 4 storey
36 office building studied its cost could not be recovered ~~at all~~ over the ~~whole~~ life time of
37 the building. For EPS insulation ~~the calculated~~ payback period was longer than its
38 useful life time for all three buildings. ~~It is concluded that the~~ FS VIPs ~~are were found~~
39 ~~to be~~ economically viable for ~~implementation~~installation onto non-domestic buildings

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Space After: 0 pt

Formatted: Left

Formatted: Default Paragraph Font,
Font: Times New Roman, Pattern: Clear

Formatted: Default Paragraph Font,
Font: Times New Roman, Pattern: Clear

Formatted: Pattern: Clear

in high rental value locations ~~due to their better performance over a longer~~assuming
a lifespan of up to 60 years.

Keywords: Payback period; Space heating energy savings; Vacuum
Insulation Panel (VIP); Fumed Silica; Glass fibre; Non-domestic buildings.

Formatted: Not Expanded by /
Condensed by

Contents

<u>1 Introduction</u>	<u>3</u>
<u>2 Cost and density indices for VIP types</u>	<u>5</u>
<u>3 Payback period calculation</u>	<u>8</u>
<u>4 Insulating non-domestic buildings</u>	<u>13</u>
<u>5 Space heating energy saving potential</u>	<u>14</u>
<u>6 Payback period results</u>	<u>17</u>
<u>6.1 Two floor retail unit</u>	<u>17</u>
<u>6.2 Four storey office</u>	<u>22</u>
<u>6.3 Six storey office</u>	<u>27</u>
<u>7 Conclusions</u>	<u>31</u>
<u>8 References</u>	<u>31</u>
<u>1 Introduction</u>	<u>3</u>
<u>2 Cost and density indices for VIP types</u>	<u>5</u>
<u>3 Payback period calculation</u>	<u>8</u>
<u>4 Details of the non-domestic buildings investigated</u>	<u>12</u>
<u>5 Space heating energy saving potential</u>	<u>14</u>
<u>6 Payback period results</u>	<u>17</u>
<u>6.1 Two floor retail unit</u>	<u>17</u>
<u>6.2 Four storey office</u>	<u>21</u>
<u>6.3 Six storey office</u>	<u>25</u>
<u>7 Conclusions</u>	<u>31</u>

8 References.....31

1 Introduction

The combustion of fossil fuels have been to generate energy is recognised as the major cause of the current trend of anthropogenic climate change and. To mitigate this, the international community has recently agreed to collectively endeavour to limit global temperature rise to within 1.5°C above pre-industrial levels [1] by reducing emissions of greenhouse gases through the use of cleaner energy sources and increased energy efficiency [1]. In 2013, emissions from space heating energy use in UK buildings accounted for 98 million tonnes of carbon dioxide (CO₂), constituting 17% of total UK greenhouse gas emissions [2]. Energy efficiency requirements for UK buildings are being continuously improved through stricter stipulations in the building regulations. The aim is to assist in reducing overall UK CO₂ emissions by at least 80% from the 1990 level by 2050 as set in the Climate Change Act 2008 [3]. With over 60% of the energy consumed in buildings used for space heating [4], building envelopes with the lowest U-value are critical for the UK to achieve its long term carbon reduction goals. However, to achieve the lowest U-value, either a prohibitively thick layers of conventional insulation, which may not be feasible in existing and new buildings, or advanced insulation material such as Vacuum Insulation Panel (VIP) are needed. VIPs offer thinner alternative due to their thermal resistance potentially being 5-8 times higher than the conventional insulation [5,6,7,8]. VIP is produced as a rigid panel made of evacuated inner core board laminated in an outer barrier envelope. VIPs can be applied in buildings on external or internal surfaces of walls, on ceiling or roof, ground floor, door and window frames and on hot water cylinders. the buildings used for space heating [4], the development of building fabrics with substantially improved insulation properties are essential for the UK to achieve its long term carbon reduction goals.

A meagre 10% To reduce heat losses from building fabric using conventional insulation products, such as Expanded Polystyrene (EPS), will require prohibitively thick layers, which may not be feasible in existing or even new buildings. Alternatively, thinner layers of advanced insulation products, such as VIPs, could be used due to their thermal resistivity being 5-8 times greater than conventional insulation [5,6,7,8,9].

A VIP is a composite rigid sheet comprising an evacuated (pressure ≤0.5 mbar) inner core board laminated inside an outer barrier envelope [10]. VIPs can be installed on opaque building surfaces (externally or internally) and on hot water

Formatted: Left

storage cylinders to improve their thermal resistance. For façade applications, transparent insulation materials [11,12] are under development. In 2014, only 10% of the VIPs currently produced are production were used infor insulating buildings with, refrigeration and transportation industry were the main users of this technology consuming 30% and 60% of the annual production of VIPs respectively 60% and 30% [9]. Uptake [13]. The uptake of VIPs in the buildings for building applications has not achieved its full potential due to their high installed cost. compared with other insulation products. Presently their, VIP use can only be justified in a few construction scenarios such as difficult to insulate buildings on account of their; for example, heritage status and narrow city centre buildings with unique architectural features or limited usable indoor space. High The high cost of VIPs is caused by the materials used in VIP production and it is of utmost importance to develop low cost due to the materials which can be used to produce in VIPs having equal or better thermal performance. Bulk of the required for manufacturing, necessitating the development of lower cost core and envelope materials with similar or improved thermal insulation properties than those currently in use. Previous research work considered expensive fumed silica as VIP core material for building applications on VIP core materials has focused mainly on Fumed Silica (FS) due to its suitable excellent thermo-physical properties, for example, Singh et al. (2015) [10]. Several studies have reported investigations into various core materials, such as Melamine-formaldehyde fibre fleece [11], expanded perlite and fumed silica composite [12], open pore melamine formaldehyde foam [13], granular silica [14], phenolic foam [15], achieving initial centre of panel thermal conductivity values of $0.0023 \text{ Wm}^{-1}\text{K}^{-1}$, $0.0074 \text{ Wm}^{-1}\text{K}^{-1}$, $0.006 \text{ Wm}^{-1}\text{K}^{-1}$, $0.014 \text{ Wm}^{-1}\text{K}^{-1}$ and $0.005 \text{ Wm}^{-1}\text{K}^{-1}$ respectively. However, these studies have restricted themselves to scientific investigations whilst [14]. But, FS is expensive and several studies, as shown in table 1, have proposed alternative core materials.

Table 1. Core materials other than FS and glass fibre reported in previous studies

Core Material	Initial Centre of Panel Conductivity ($\text{Wm}^{-1}\text{K}^{-1}$)	Reference
Melamine-formaldehyde Fibre fleece	0.0023	[15]
Expanded perlite and fumed silica composite	0.0074	[16]
Open pore melamine formaldehyde foam	0.006	[17]
Granular Silica	0.014	[18]
Phenolic foam	0.005	[19]
Fumed silica/rice husk ash hybrid mixture	0.0055-0.0062	[20]

Published research on the materials listed in table 1 have primarily focused on the thermo-physical performance of VIPs neglecting the potential for energy savings and the associated economic analysis of VIPs has been largely overlooked with few exceptions such as. Cho et al. (2014) [16][21], Alam et al. (2011) [17][10] and Tenpierik (2009) [18], though these three studies have only covered [22] published economic analysis of VIPs but only considered domestic buildings, building applications. Kucukpinar et al. [11] demonstrated that VIP insulation reduced annual energy consumption by 25% for two mock-up rooms situated in Poland and Spain. This paper reports the most comprehensive and realistic Mujeebu et al. [23] predicted using ECOTECT software that VIPs fixed to the roof and external walls would reduce annual energy consumption by 0.62% for a single office building and 0.79% for a multi-storey office building compared to EPS. Clearly, the energy saving and economic potential of VIPs is dependent on the type of building and its location (climatic and economic factors) thus further research to clarify the energy saving potential of VIPs is required. Mujeebu et al. [24] predicted the simple payback analysis of VIPs when used in period of VIPs to be 5.3 times longer than that of EPS if installed in a multi-storey office building in Saudi Arabia. The, simple payback method used by Mujeebu et al. [24], did not consider the impact on energy savings from the deterioration of the VIP thermal performance with time, the economic value of space savings due to thinner section of VIPs and the varying time value of money. These factors significantly influence payback periods and must be considered to enable a more accurate calculation to be made of the cost effectiveness of VIPs compared to other insulation materials. The objective of this paper is to calculate the payback period of VIPs through a discounted economic analysis whilst simultaneously accounting for the other identified factors which affect it. To investigate this, an energy saving and economic payback analysis of FS and GF VIPs installed on three representative non-domestic buildings situated in London (UK) was undertaken. A novel methodology has been developed which is able to take into account which considered the change of VIP thermal performance with over time, fuel price variability, heating system efficiency degradation with time as well as and the money economic value of space savings resulting realised from using comparatively thinner VIPs, was developed. No such information currently exists in the peer reviewed literature. Realistic cost Cost and density indices linked with to the thermal conductivity of FS and GF VIPs were calculated and presented. Payback. The discounted payback period for VIPs has been was then compared with to that of conventional expanded polystyrene (EPS) insulation in order, to assess their comparative the cost effectiveness of each.

2 Cost and density indices for VIP types

VIPs are typically classified based on by the type of main core materials used for in their manufacturing, which includes fumed silica (FS), expanded perlite (EP), FS and EP composites (FS+EP), glass fibre (GF) and polyurethane foam (PU) along

with opacifiers, getters and desiccants. VIPs with ~~different~~diverse core materials have ~~varying~~different expected life ~~time~~times, which determines their suitability for a specific ~~application~~. ~~Cost~~applications. The cost of VIP core materials can account for up to 40–45% of the total ~~VIP cost~~. Table 1 shows the price, initial centre of panel thermal conductivity (λ) (thermal conductivity at the time of manufacturing at centre of panel), design thermal conductivity (thermal conductivity including the thermal bridging effect and ageing effect) and density of VIPs made with different core materials~~cost~~.
~~Cost~~The price, initial (measured at the time of VIPs can be linked with their main physical properties such as manufacturing) centre of panel thermal conductivity (λ) design thermal conductivity (thermal conductivity including the thermal bridging effect and ageing effect) and density ~~to compare performance of VIPs made with different types of VIPs~~. For this~~core materials are shown in table 2~~.

Table 12. Cost and main physical properties of different types of VIPs

Type of VIP	Cost (£m ⁻³)	Initial centre of panel λ (Wm ⁻¹ K ⁻¹)	Design λ (Wm ⁻¹ K ⁻¹)	Density (kgm ⁻³)	Service Life (years)
VIP Fumed silica (FS)	2365	0.0043 ^a	0.008	180 ^a	60 ^a
VIP Fumed silica& Expanded perlite composite (FS+EP)	2152	0.0076 ^b	0.0116	330 ^b	30
VIP Expanded perlite (EP)	1809	0.013	0.017	290	20
VIP Polyurethane (PU)	2000	0.009 ^a	0.013	65 ^a	15 ^a
VIP Glass fibre (GF)	1464	0.0028 ^c	0.0068	200 ^c	10 ^c

^a va-Q-tec AG (2016) [1925]; ^b Alam et al.(2014) [1216]; ^c Di et al.(2013) [2026]

~~purpose-a~~Cost and density indices for the materials shown in table 2 were derived. The cost index, ~~defined-as~~was the product of cost and initial centre of panel thermal conductivity~~-and~~. The density index, ~~defined-as~~was the product of density and ~~the~~

initial centre of panel thermal conductivity, ~~were calculated as shown in figure 1.~~
VIPs with smaller values of these indices are more desirable. Figure 1 shows the
calculated cost and density index of the materials listed in table 2.

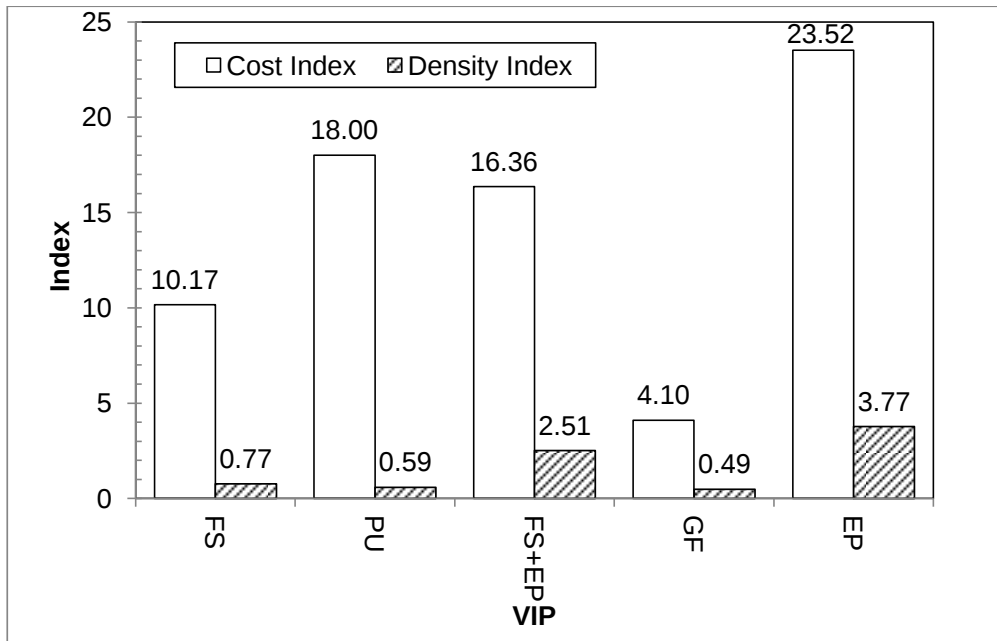


Figure 1. Cost and density index of different types of VIPs

~~desired compared to those having higher values.~~ Calculating the cost and density
index of VIPs allows the relationship between cost and thermo-physical properties to
be observed. From figure 1, GF VIP returned the smallest cost index of 4.10 (best
performance) followed by FS, FS+EP composite, PU and EP in that order. ~~With~~
~~respect to~~ Comparing the values of density index shown in figure 1, GF VIP has
VIPs have the ~~least~~ lowest calculated value of 0.49, ~~again performing best,~~ whilst EP VIP
returned a VIPs the highest value of 3.77. FS VIP, ~~due to its~~ with a comparatively
lower initial thermal conductivity and density, has ~~2.4 times~~ 4X and ~~1.5 times~~ 5X lower
cost and density indices respectively than that of FS+EP composite VIP. ~~One~~
~~interesting fact that came out of this analysis is that~~ FS VIP ~~has had~~ a calculated cost
index ~~2.48 times~~ and density index ~~2.48X and 1.57 times higher~~ 57X greater
respectively than ~~that of~~ GF VIPs. However, GF VIP ~~suffers from~~ VIPs have a
significantly shorter life time, ~~approximately~~ of 10-12 years, compared to the lifetime
of 50-60 years ~~of expected for~~ FS VIPs.

Formatted: Left

Formatted: Pattern: Clear (White)

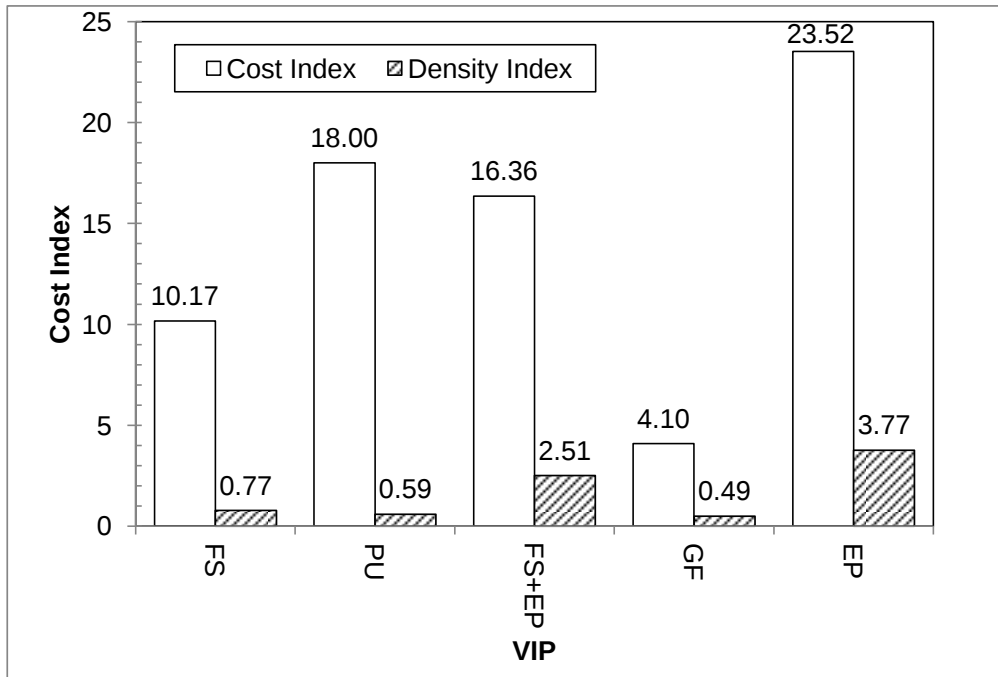


Figure 1. Cost and density index of different types of VIPs

3 Payback period calculation

~~Payback period, defined as the least possible time insulation takes installation of VIPs, to recover its installed cost~~ The discounted payback period is the time taken for an investment, such as the least possible time insulation takes installation of VIPs, to recover its installed cost ~~repay the initial capital~~ through the realised savings taking into account fuel cost savings and other accrued benefits. It is a critical factor in the choice of insulation. ~~Net present value (NPV) which the most cost effective insulation and was quantified by calculating the Profit on investment (POI) for each scenario investigated using equation (1). The POI accounts for the time value of money can be used to evaluate the payback period for VIPs; present values of energy savings, space savings and present value of the capital costs. The payback period/year of any investment is reached when NPV the POI equals zero. NPV can be calculated using equation (1):~~

$$NPV = -C_T + [C_E \times 1/(1+r)^n] + [C_S \times 1/(1+r)^n] \quad (1)$$

where

C_T is the total insulation cost (£)

C_E is annual energy cost saving (£)

n is the number of year

r is the annual discount rate

251 C_s is the annual for the very first time [27]. In case of commercial buildings, space
 252 savings due to thinner VIP sections would provide additional rental income due to
 253 space saving (£) revenue for building owners, and is included in equation (1);

Formatted: Left

Formatted: Pattern: Clear

Formatted: Pattern: Clear (White)

254
 255 C_T , C_E and C_s can be calculated using equations (2), (3) and (8) respectively.

256
 257
$$C_T = C_{ME} + C_M + C_I \quad (2)$$

258
 259
 260
$$POI = \left[\frac{86400 \times HDD \times \Delta L \times C_F}{H_v \times \left(\frac{\eta_i - x \times n}{100} \right)} \times \frac{1}{(1+r)^n} \right] + \left[Y \times \Delta d \times 2 \{ (L_f + \Delta d) + (W_f + \Delta d) \} \times \frac{1}{(1+r)^n} \right] -$$

 261
$$[C_{Mt} + C_M + C_I] \quad (1)$$

262
 263 where

Formatted: Pattern: Clear (White)

Formatted: Line spacing: 1.5 lines

Formatted: Font: Times New Roman

264 C_{Mt} is the material cost of VIP core and envelope (£)

265 C_M is the manufacturing cost of VIP (£)

266 C_I is the installation cost of VIP (£)

267
 268
$$C_E = \frac{86400 \times HDD \times \Delta L \times C_F}{H_v \times \eta (1-x)} \quad (3)$$

269
 270 where

271 HDD is the heating degree days ($^{\circ}\text{C days}$)

272 C_F is the cost of fuel (£m^{-3})

273 H_v is the calorific value of fuel (Jm^{-3})

274 η_i is the initial thermal efficiency of the heating system (boiler) (%)

275 x is the annual rate of decrease of thermal efficiency of heating boiler (%)

276 ΔL is the difference of total building transmission heat loss coefficient (L) before and
 277 after applying insulation (WK^{-1})

278 n is the number of year

279 r is the annual discount rate (% fraction)

280 Y is the annual rental value (£m^{-2})

281 A_s the floor area saved (m^2)

282 F is the number of floors

283 Δd is the difference in thickness of conventional insulation and VIP insulation (m)

284 L_f is the length of internal floor (m)

285 W_f is the width of the internal floor (m)

Formatted: Space After: 0 pt

286
 287 Total building transmission heat loss coefficient (L) is described in equation (4)

$$L = \sum_{i=1}^{i=N} U_i(t) A_i + \frac{I(\rho c_p)_{\text{air}} V}{3600} \quad (4)$$

$$L = \sum_{i=1}^{i=N} U_i(t) A_i + \frac{I(\rho c_p)_{air} V}{3600} \quad (2)$$

where

A_i is the insulated area of the building element i (m^2)

U_i is the U-value of the building element i ($Wm^{-2}K^{-1}$)

I is the air exchange rate per hour (ach^{-1})

V is the internal volume of the building (m^3)

$(\rho c_p)_{air}$ is the volumetric thermal capacity of air ($Jm^{-3}K^{-1}$) taken as $1200 Jm^{-3}K^{-1}$.


Hence, the equation (42) can be rewritten as

$$L = \sum_{i=1}^{i=N} U_i(t) A_i + \frac{IV}{3}$$

(53)

In equation (53), term $\frac{IV}{3}$ is the ventilation conductance (WK^{-1}) [2128].

The different parameters used for calculating the discounted payback period analysis presented in this study are detailed in table 23. The annual discount rate was taken as 4%. Natural gas long term price has been taken from forecast reported by the UK Department of Energy and Climate Change long term price forecast [22], [29] for natural gas which is shown in figure 2, and extrapolated for the assumed life time of the building-buildings under investigation was used to calculate space heating energy savings

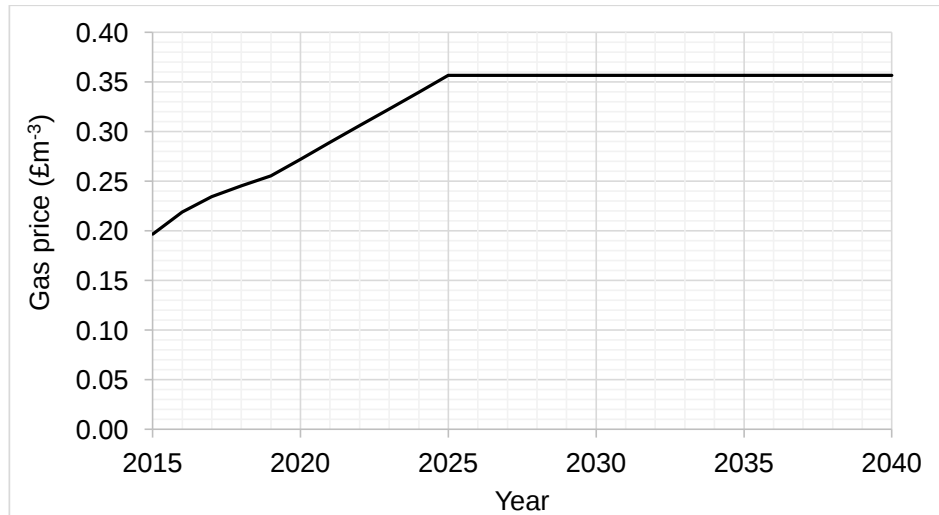

The Figure 2. Gas price forecast [22]

Heating degree (HDD) data was used to determine energy consumption for space heating was the 5 year average (2011 to 2015) for a base temperature of 15.5 °C for St. James Park London [23]. The rate of decrease of 30]. Gas condensing boilers are assumed to suffer from an annual fall in their thermal efficiency of gas condensing boiler system has been taken as by 0.5 % per annum. Installation% with a useful lifespan of 20 years. The installation cost has been assumed to be the same for all VIP types and has investigated so was not been included in the calculations.

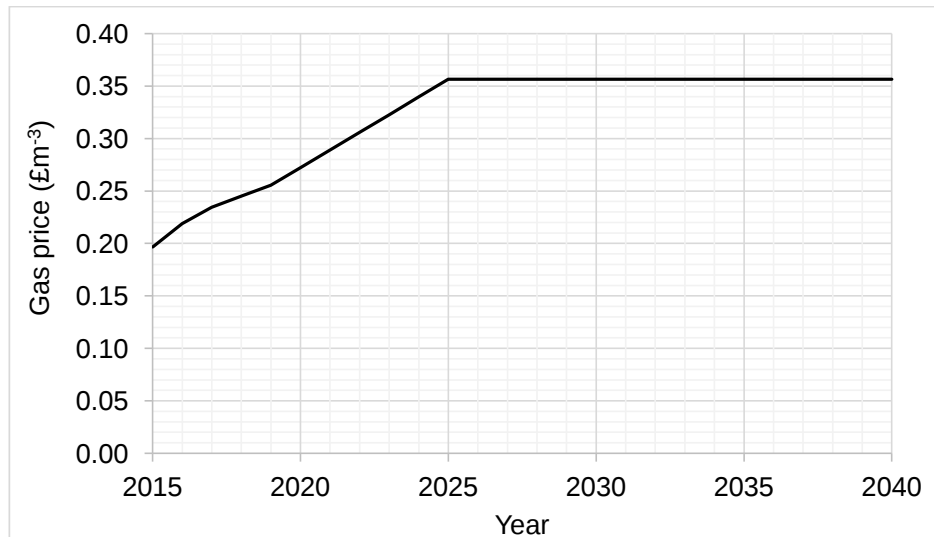


Figure 2. Gas price forecast [29]

Table 23. Parameters used for payback period calculation

Parameters	Description/Value
Fuel	Natural gas
HDD (°Cdays) [26]	1624
Fuel cost, C_F , (£m ⁻³) [25]	0.196
Heating value, H_V , (MJm ⁻³)	39.5
Heating/Initial heating system efficiency, η_i , (%)	90
Annual discount rate, r , (%)	4

The U-value of a building elements was determined by calculating the thermal resistances of the constituent material layers and the adjacent air

layers as shown in equation (6) and (7) [23]. Thermal 4) [28]. The thermal resistance of any building material layer is the ratio of its thickness to its thermal conductivity.

$$U = \frac{1}{R_{si} + (\sum R_e) + R_{sx}} \quad (64)$$

where

U is the thermal transmittance ($\text{Wm}^{-2}\text{K}^{-1}$)

R_{si} is the internal surface resistance (m^2KW^{-1})

R_e is the thermal resistances of a material layer (m^2KW^{-1})

R_{sx} is the external surface resistance (m^2KW^{-1})

~~Thermal~~The thermal conductivity of a VIP variesdecreases with time as the core pressure inside VIP increases due to outgassing from core and envelope and, or via penetration of to the interior by atmospheric air and moisture to the interiors of VIP. This degradation. Degradation in VIP performance should be was accounted for whilstwhen calculating the U-value of anythe building element containing VIP insulation. Thus, elements insulated with VIPs, by modifying equation (6) can be modified to arrive at4) as shown in equation (75).

$$U(t) = \frac{1}{R_{si} + (\sum R_e) + R_{vip}(t) + R_{sx}} \quad (75)$$

where

$R_{vip}(t)$ is the time dependent thermal resistance resistivity of the VIP layer in a building element and can be described as calculated using equation (86):

$$R_{vip}(t) = \frac{d_{vip}}{\lambda_{vip}(t)} \quad (86)$$

where d_{vip} is the thickness and $\lambda_{vip}(t)$ the time dependent thermal conductivity of VIP.

~~In this study~~For the U-value calculations used by this research, design thermal conductivity values of $0.008 \text{ Wm}^{-1}\text{K}^{-1}$, $0.007 \text{ Wm}^{-1}\text{K}^{-1}$ and $0.035 \text{ Wm}^{-1}\text{K}^{-1}$ were used for FS VIP, GF VIP and EPS respectively. for U-value calculations. For FS VIP rate ofVIPs and GF VIPs the annual increase in thermal conductivity rise of was assumed as $0.0001 \text{ Wm}^{-1}\text{K}^{-1}\text{a}^{-1}$ [2431] and for GF VIP $0.0018 \text{ Wm}^{-1}\text{K}^{-1}\text{a}^{-1}$ [20] has been adopted. respectively [26].

~~Use of VIPs can yield extra usable indoor space compared to conventional EPS insulation whilst achieving equal U-values. In case of commercial buildings, this~~

valuable space can provide additional revenue for building owners, and has been included in NPV equation (1) as the annual savings (C_s) calculated using equation (9):

$$C_s = Y \times A_s \quad (9)$$

Where 4 Details of the non-domestic buildings investigated

The opaque elements (i.e. walls, floor and roof) of three different types of commercial (non-domestic) Y is the annual rental value (£m⁻²) and A_s the floor area saved (m²).

Floor area savings for buildings can be calculated using equation (10) [18]:

$$A_s = F \times \Delta d \times 2 \times [(L_f + \Delta d) + (W_f + \Delta d)] \quad (10)$$

where

F is the number of floors

Δd is the difference in thickness of conventional insulation and VIP insulation (m)

L_f is the length of internal floor (m)

W_f is the width of the internal floor (m)

4 Insulating non-domestic buildings

Threesituated in London based non-domestic buildings,(UK): a two floor retail unit, a four storey office and a six storey office, have been studied to have been considered for retrofitting with VIPs and/or EPS insulation on all opaque elements (i.e. walls, The two floor retail unit building is representative of 10% of the current retail building stock in the UK by age of construction (1989-90) and 13% by floor area (250-500 m²) [32]. The four storey office building type accounts for 9% of the office building stock in the UK by age of construction (1981-85) and roof), see table 3 for 20% by floor area (2500-10,000m²) [32]. The six storey office building accounts for 11% of the office building stock in the UK by age of construction (1986-90) and 20% by floor area (2500-10,000m²) [32]. Table 4 shows the relevant details for each of the buildings investigated. Each building has been assumed to be refurbished to current building regulation standards by applying internal insulation on all opaque elements achieving U-values of 0.30 Wm⁻²K⁻¹, 0.18 Wm⁻²K⁻¹ and 0.25 Wm⁻²K⁻¹ for wall, roof and floor respectively [2533]. Table 34 shows U-values before and after applying insulation on all buildings considered in the study along with their thickness values. It has been assumed that VIPs covercovered 95% of the all opaque elements whilstwith phenolic foam insulation covering the remaining 5%. The thermal conductivity of the Phenolic foam hasused was assumed to have a thermal conductivityas of 0.020 Wm⁻¹K⁻¹.

Formatted: Pattern: Clear

Formatted: Space After: 0 pt

Formatted: Left

Table 34. Details of buildings studied and U-values before and after the application of insulation

Building	Parameter	Wall	Floor	Roof
Retail Unit	Existing U-value ($\text{Wm}^{-2}\text{K}^{-1}$)	0.65	0.46	0.96
	U-value after applying insulation ($\text{Wm}^{-2}\text{K}^{-1}$)	0.30	0.25	0.18
	FS VIP Thickness (mm)	25	25	65
	GF VIP Thickness (mm)	40	40	110
	EPS Thickness (mm)	60	65	155
4 Storey Office	Existing U-value ($\text{Wm}^{-2}\text{K}^{-1}$)	0.65	0.30	0.87
	U-value after applying insulation ($\text{Wm}^{-2}\text{K}^{-1}$)	0.30	0.25	0.18
	FS VIP Thickness (mm)	30	10	65
	GF VIP Thickness (mm)	40	20	110
	EPS Thickness (mm)	74.5	20	155
6 Storey Office	Existing U-value ($\text{Wm}^{-2}\text{K}^{-1}$)	0.44	0.30	0.37
	U-value after applying insulation ($\text{Wm}^{-2}\text{K}^{-1}$)	0.30	0.25	0.18
	FS VIP Thickness (mm)	15	10	40
	GF VIP Thickness (mm)	25	20	65
	EPS Thickness (mm)	40	25	100

Formatted Table

5 Space heating energy saving potential

The potential space heating energy savings and associated reduction in carbon dioxide (CO_2) emission from using VIP insulation in all three types of buildings (described in table 3) has been calculated. The annual space heating energy saving (E_A) of buildings for any year (n) was calculated using equation (11).

$$E_A = \frac{86400 \times HDD \times \Delta L}{H_p \times \eta (1 - x)} \quad (7)$$

where

HDD is the heating degree days ($^{\circ}\text{C days}$)

H_p is the calorific value of fuel (Jm^{-3})

η is the thermal efficiency of the heating system (boiler)

x is the annual rate of decrease of thermal efficiency of heating boiler

ΔL is the difference of total building transmission heat loss coefficient before and after applying insulation (WK^{-1}).

Formatted: Left, Line spacing: Multiple 1.15 li

Formatted: Left

TotalThe building transmission heat loss coefficient (L) takes into accountincorporates the U-values of all building elements. In the case of applying VIP insulation the U-value varies with time and can be calculated using equations (75) and (8). Time6). The time dependent U-values of the wall, floor and roof of the retail unit building insulated with VIPs is shown in figure 3.

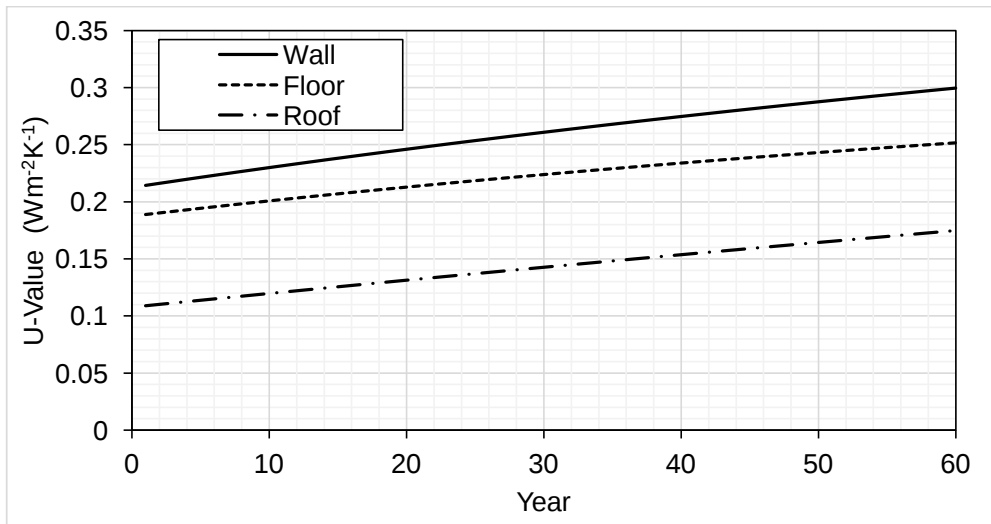
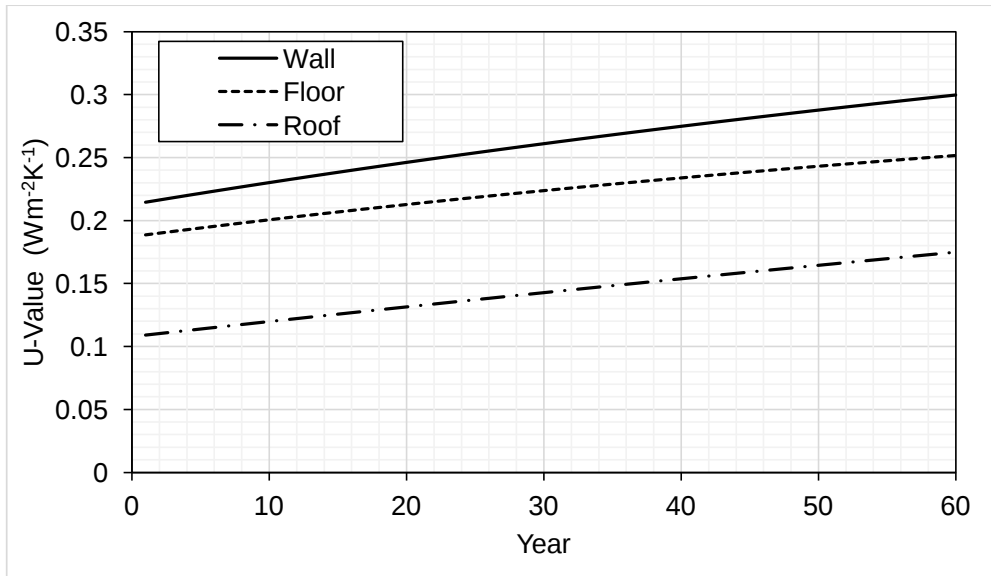


Figure 3. Time dependent U-values of VIP insulated wall, floor and roof of the two floor retail unit building studied

Applying VIP insulation ~~reduces~~reduced the U-value of building elements, ~~see as~~ shown in table 3, and results in 4, saving space heating energy ~~savings~~. The energy saved over the assumed 60 year life time of the ~~building, assumed to be 60 years,~~ for all three buildings considered is shown in figure 4.

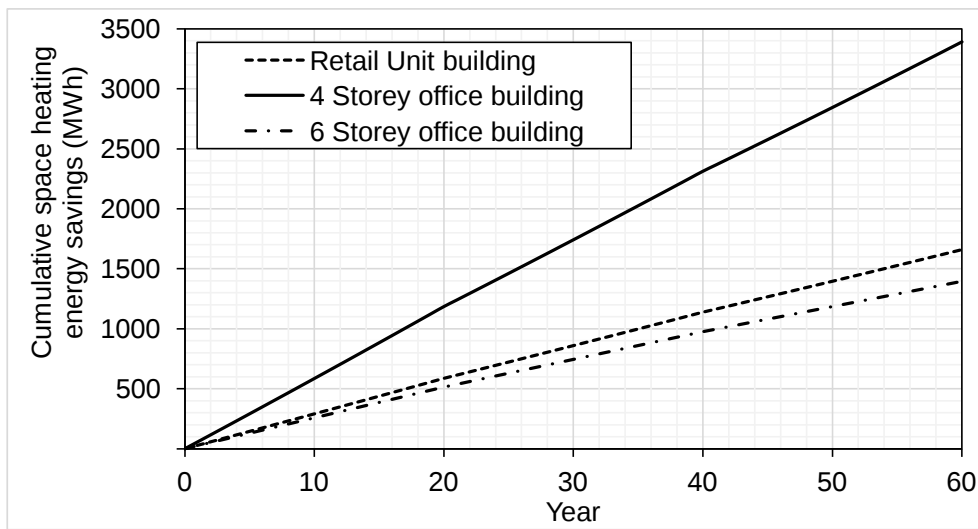


Figure 4. Cumulative space heating energy savings of the VIP insulated buildings studied

OverUsing the full parameters outlined previously in table 4 over the assumed building life time, span of 60 years, installing VIPs ~~can save~~would reduce the energy used for space heating ~~energy of by~~ 1395.3 MWh, 1661.2 MWh and 3391.6 MWh for the six storey office building, the retail unit building and the four storey office building

Formatted: Left

respectively. ~~Potential~~The potential reduction in CO₂ emissions ~~were~~was calculated using ~~a~~ fuel emission factor of 0.18365 kgCO₂/kWh [2634] and ~~are~~ shown in figure 5. Use of VIPs was calculated to potentially reduce CO₂ emissions by 10.2%, 41.3% and 26.7% respectively for six storey office building, retail unit building and four storey office building.

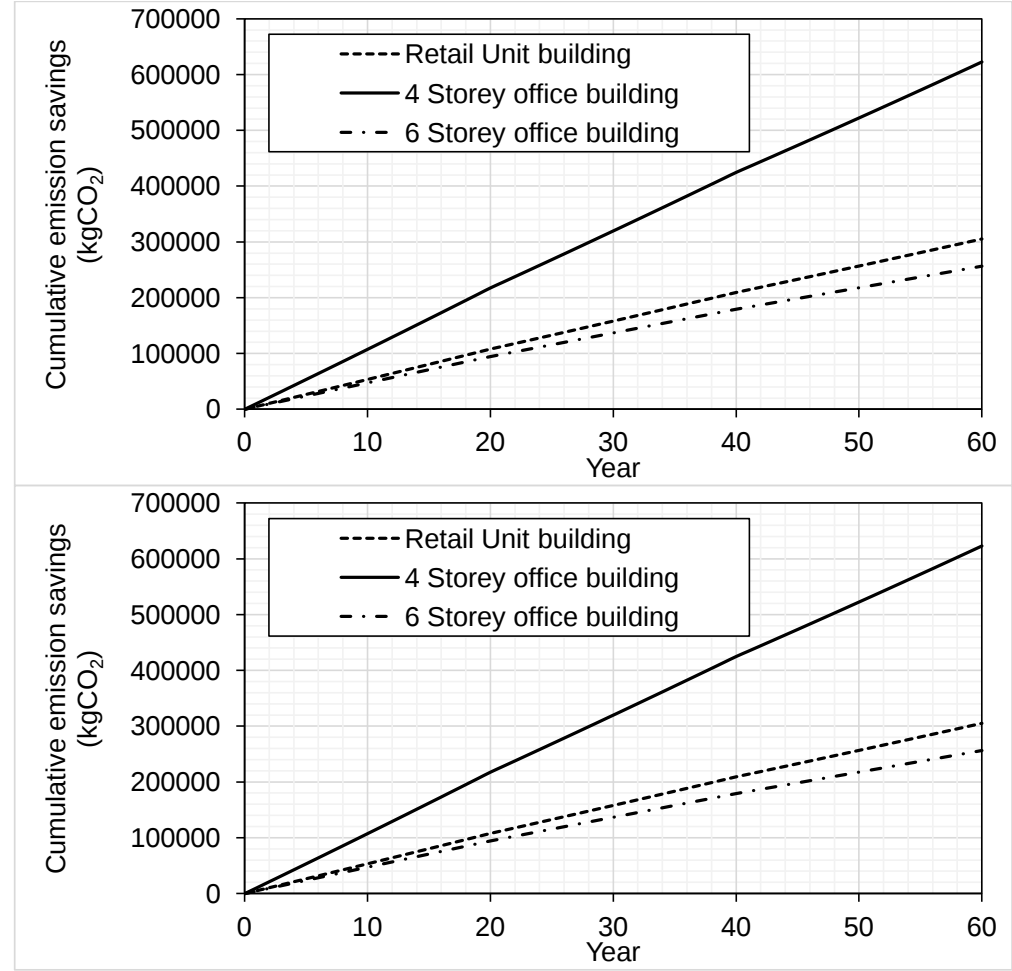


Figure 5. Reduction in CO₂ emissions for three buildings studied

6 Payback period results

A discounted Payback period analysis of FS VIPs, GF VIPs and EPS insulation applied in buildings described in table 4 was carried out using equation (1-6) and the results are presented in section 6.1, 6.2 and 6.3.

6.1 Two floor retail unit

The ~~geometric~~Geometric and thermal ~~feature~~features of the ~~building~~buildings studied are shown in table 4. This type of buildings account for 10% of the retail building

Formatted: Left

stock in the UK by age of construction (1989-90) and 13% by floor area (250-500 m²) [27]. The wall, floor and roof U-values are shown in table 4. Payback period analysis of FS VIPs and GF VIPs has been carried out employing equations (1-10) and compared with that of EPS insulation. EPS insulation was found to take longer than its life time to recover the The cost of insulation installing sufficient EPS for achieving current building insulation standards could not be recovered within its lifetime, see figure 6. For EPS, no space saving revenue is possible, which means that investments are solely recovered through fuel cost savings. Also, EPS due to a comparatively shorter service life of 20 years will require to be replaced requires replacement three times over an assumed 60 year building life span of the building leading to a higher insulation cost. A life span of 60 years for building has been was assumed to match the

Table 45. Geometric and thermal features of the buildings considered in this study

Parameter	Two-floor Retail Unit	Four Storey Office	Six Storey Office
Length (m)	15	40	60
Width (m)	15	15	15
Height of each storey (m)	4.5	3.7	3.7
Glazing Area (m ²)	81.0	769.6	1665.0
Glazing U-Value (Wm ⁻² K ⁻¹)	5.38	2.75	1.9
Air infiltration rate (ach)	0.25	0.25	0.25

match the prescribed life span of VIPs used for buildings in the UK. In the case of VIPs, the additional benefit of commercial space saving can partially offset the higher initial insulation cost. The Results of payback period analysis for two different types of VIPs (FS and GF) taking into account



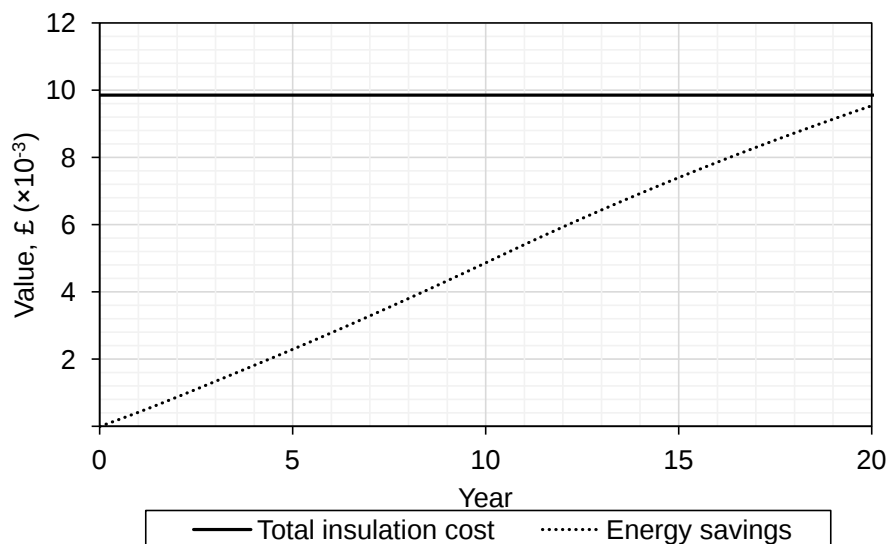


Figure 6. Cost and savings of applying EPS insulation in a retail unit building

Formatted: Left


the economic potential of space saving with average annual rental value in London (UK) ranging from £1000 m⁻² to £4000 m⁻² [28] has been [35] is shown in figure figures 7 and 8 respectively. Results show Figures 7 and 8 demonstrate that the cost of GF VIP insulation with a rental value of £1000 m⁻² cannot be recovered over the life time of the buildings building whereas FS VIP will take only 7 years to recover the investment. This finding can be explained as follows. GF VIP, though costing 1.6 times lesser than FS VIP, will need to must be replaced six times over the life time of the building due to their shorter service life (10 years) as, compared to that of FS

513 VIP (60 years). As expected, as the rental values increase the payback period for
514 VIP insulation becomes shorter. For rental ~~value~~values of

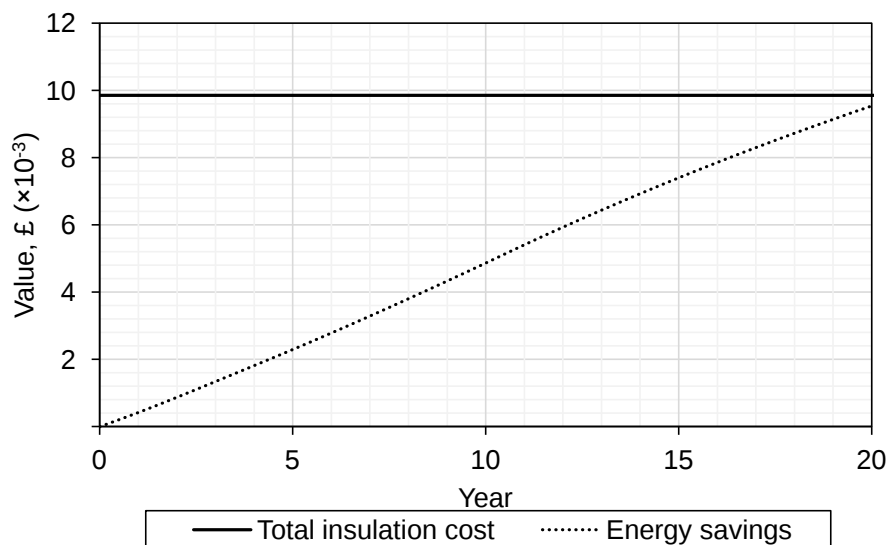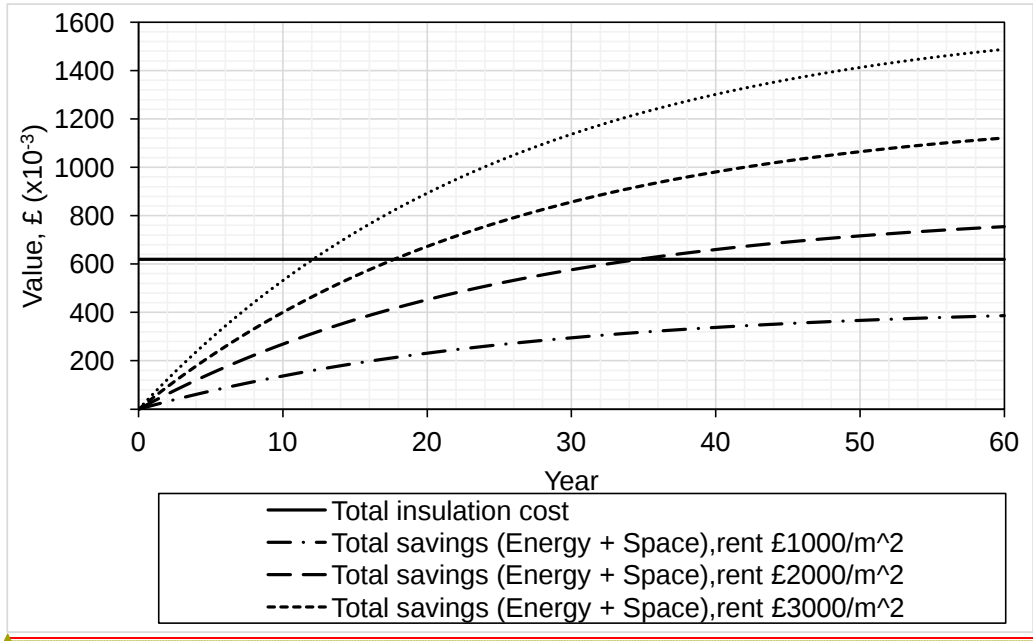

Formatted: Font: (Default) Arial


515
516
517 Figure 7. Cost and savings of applying GF VIP insulation in the retail unit building
518 studied
519

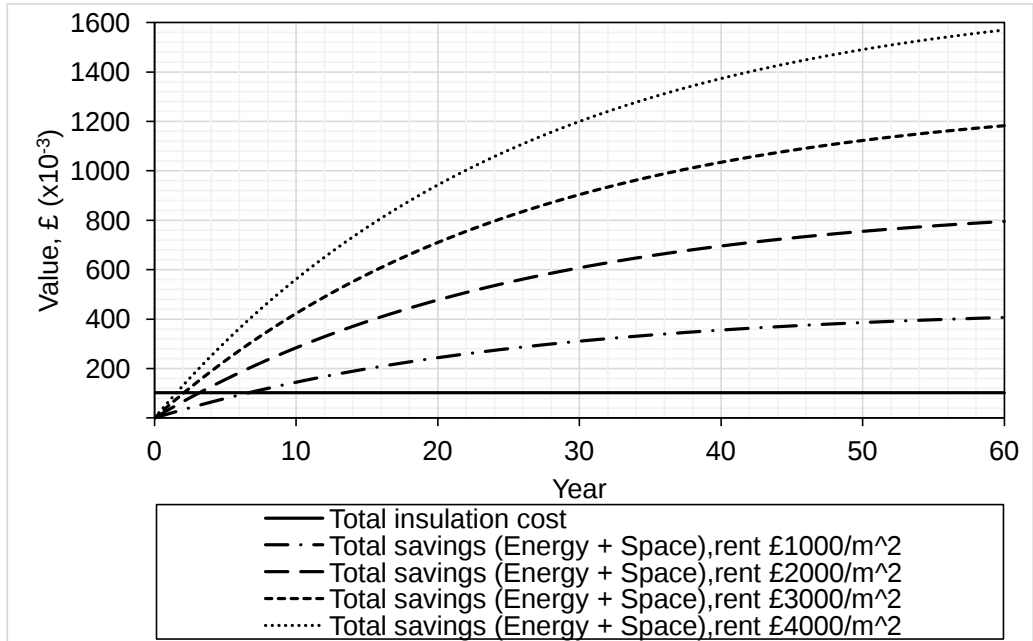


Formatted: Font: (Default) Arial

Figure 8. Cost and savings of applying FS VIP insulation in the retail unit building studied

£2000 m⁻² and £3000 m⁻² it is the discounted payback period was 35 years and 18 years respectively for GF VIP and 4 years and 3 years for FS VIP. For average rental value of £4000 m⁻² payback period of FS VIP becomes approximately 2 years, whereas it is still prohibitively longer (12 years) for GF VIPs.

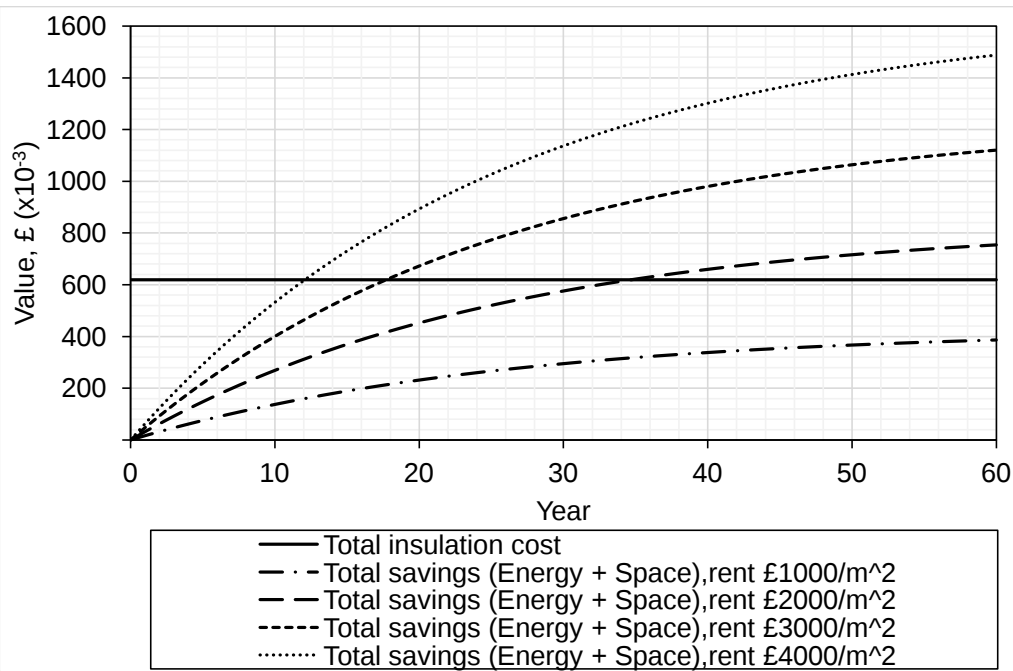

~~Figure 7. Cost and savings of applying GF VIP insulation in the retail unit building studied~~

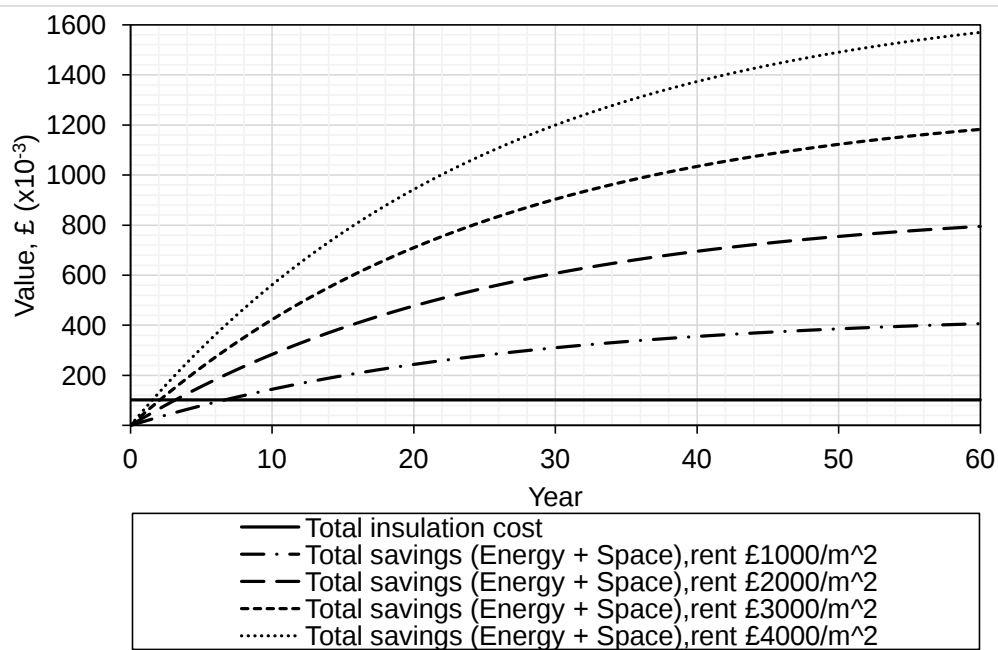

Formatted: Font: (Default) Arial

Figure 8. Cost and savings of applying FS VIP insulation in the retail unit building studied

6.2 Four storey office

The geometric and thermal features of the building studied four storey office are shown in table 4. This building type accounts for 9% of the office building stock in the UK by age of construction (1981-85) and 20% by floor area (2500-10,000m²) [27]. The wall, floor and roof U-values are shown in table 3. Payback5. The discounted payback period analysis for the four storey office is presented in figure 9, 10 and 11 for achieving retrofitted to meet current building insulation standards with using EPS insulation, GF VIP insulation and FS VIP insulation. VIPs is presented in figures 9 to 11 respectively.


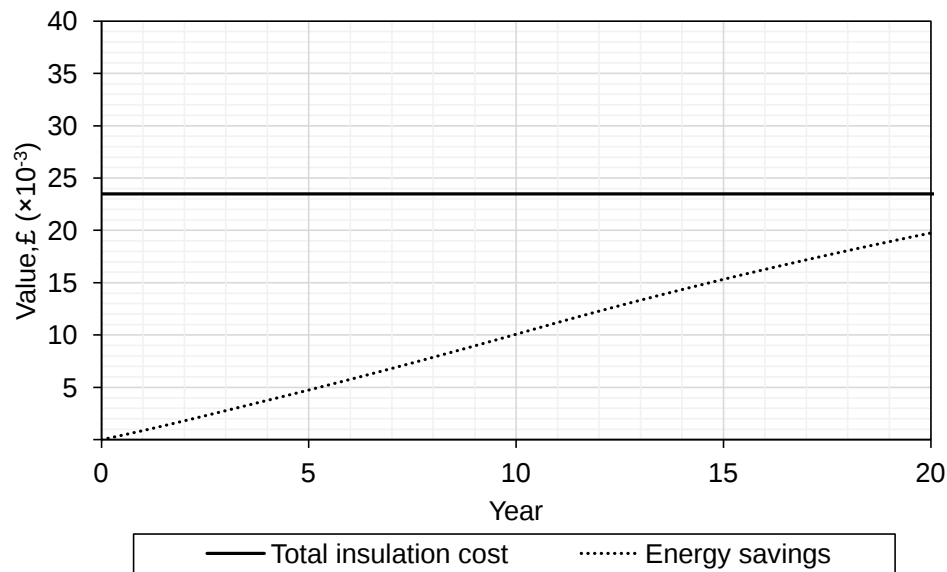



Figure 9. Cost and savings of applying EPS insulation in the 4 storey office building studied

Figure 9 ~~shows~~demonstrates that EPS insulation cannot recover the initial capital cost over its life time of 20 years. For GF ~~VIP even considering additional benefit of the economic potential of space saving with average annual rent ranging from £400 m⁻² to £1000 m⁻² [29]~~VIPs the cost of insulation cannot be recovered over the life time of building as shown in figure 10; ~~even with the additional economic benefits from space saving with average annual floor rents ranging from £400 m⁻² to £1000 m⁻² [36]~~. As ~~stated~~discussed in section 6.1, the reason for long payback period for GF VIPs is their short service life (10 years) requiring replacement six times during 60- ~~year~~ year life time of the building.

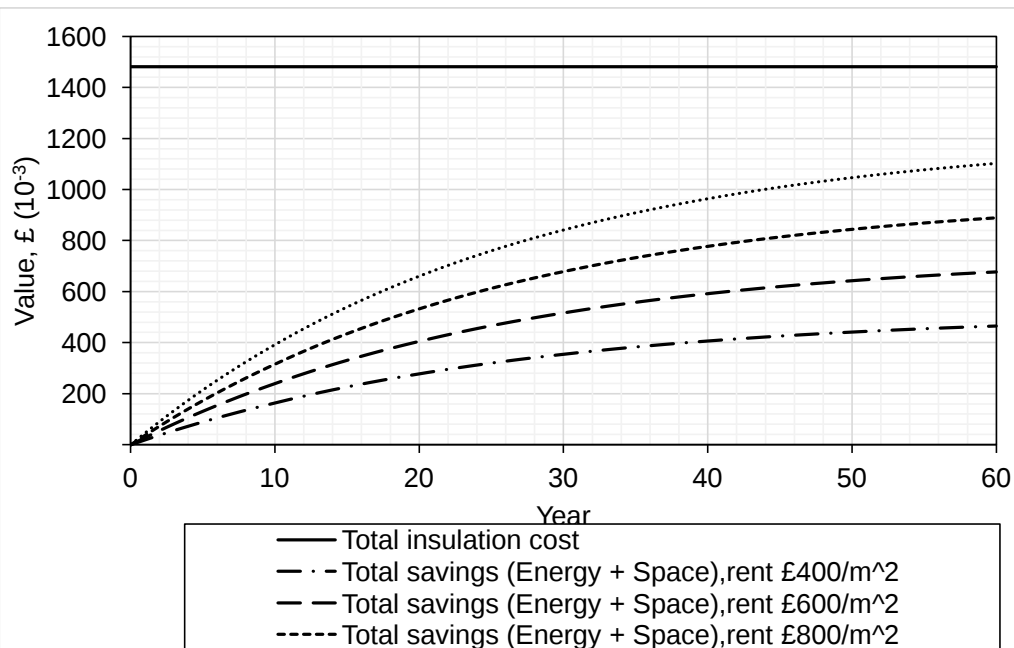

Formatted: Font: (Default) Arial

Figure 10. Cost and savings of applying GF VIP insulation in the 4 storey office building studied

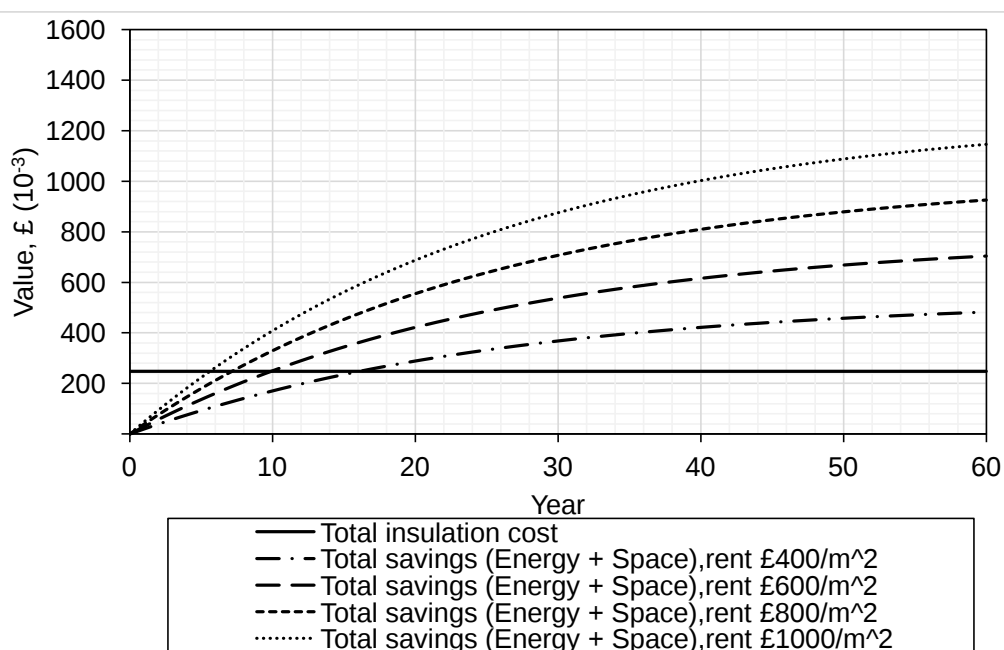

Formatted: Font: (Default) Arial

Figure 11. Cost and savings of applying FS VIP insulation returned in the 4 storey office building studied

From figure 11, it can be seen that upgrading the 4 storey office with FS VIP insulation to comply with current building regulations resulted in payback periods of 17 years, 10 years, 7 years and 6 years for rental values of £400 m⁻², £600 m⁻², £800 m⁻² and £1000 m⁻² respectively.

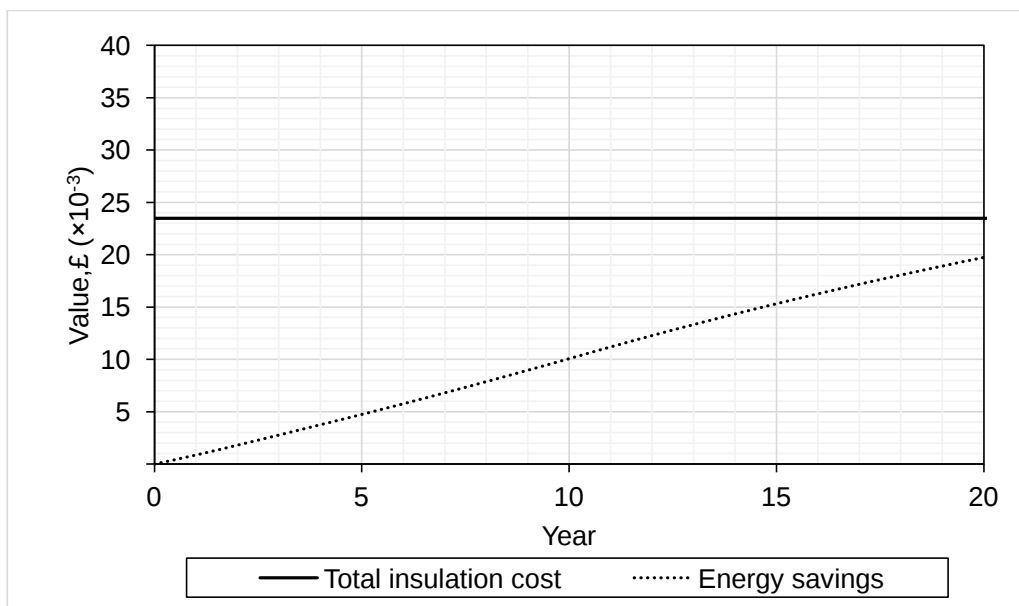


Figure 9. Cost and savings of applying EPS insulation in the 4 storey office building studied

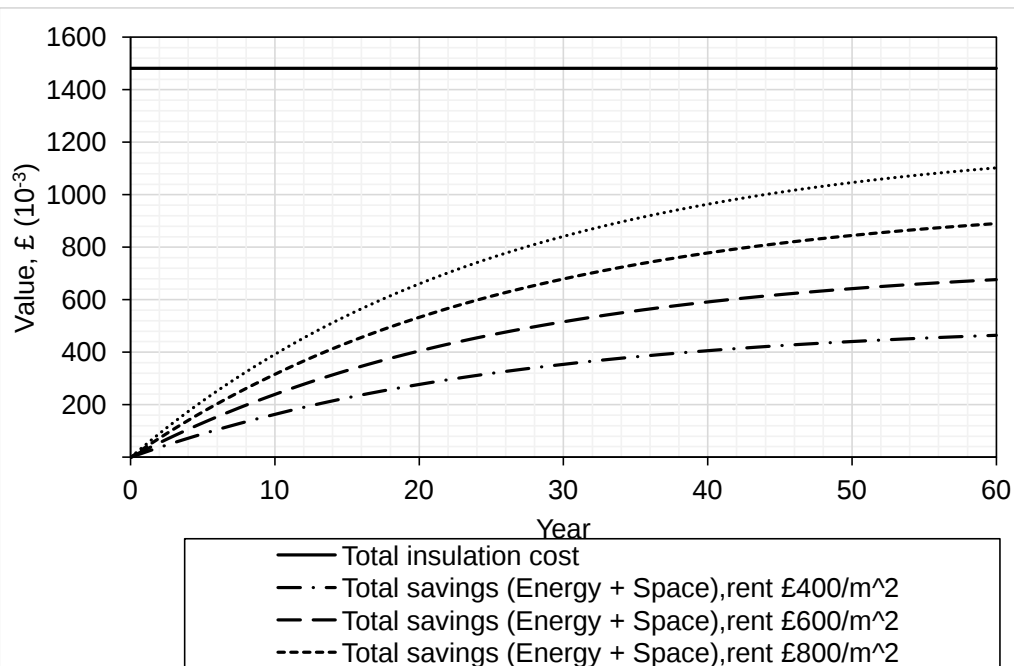


Figure 10. Cost and savings of applying CF-VIP insulation in the 4-storey office building studied

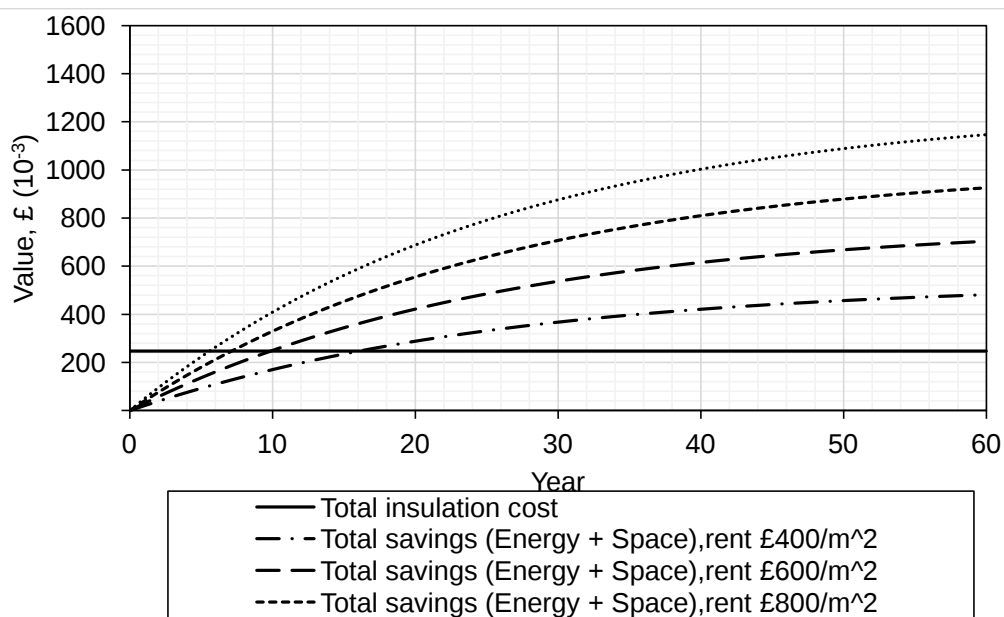


Figure 11. Cost and savings of applying FS-VIP insulation in the 4-storey office building studied

6.3 Six storey office

The geometric and thermal features of the building studied six storey office are detailed in table 4. This building type accounts for 11% of the office building stock in the UK by age of construction (1986-90) and 20% by floor area (2500-10,000m²) [27]. Results of the discounted payback period analysis for the six storey office building is shown in figure 12, figure 13 and figure 14.

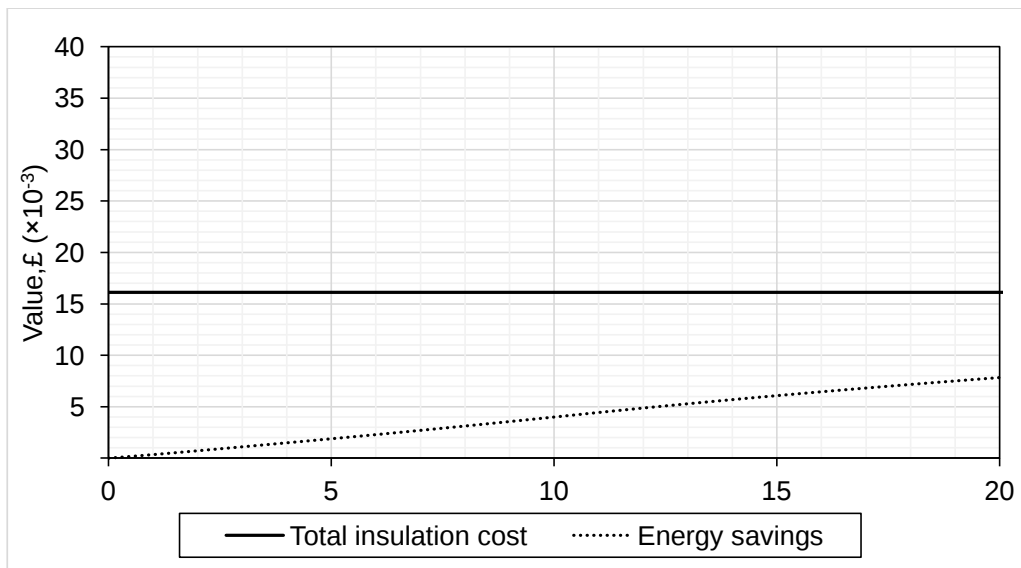


Figure 12. Cost and savings of applying EPS insulation in the 6 storey office building studied

Figure 12 shows that EPS insulation was found to have the had a discounted payback period longer than its assumed life time of 20 years. It can be seen from figure 13 that in the case of GF VIP, the cost of insulation cannot be recovered with average annual rent of £400 m⁻² and £600 m⁻² as shown in figure 13. For higher annual rents of £800m⁻² and £1000m⁻² payback periods of respectively 39 years and 25 years are predicted. Interestingly, FS VIP achieves. It is clearly observed, from figure 14, that FS VIPs had a shorter payback period than both EPS and GF VIPs. FS VIP is shown was found to have a payback period of 7 years, 5 years, 3 year and 2.5 years with rental values of £400 m⁻², £600 m⁻², £800 m⁻² and £1000 m⁻² respectively, figure 14. These results clearly show that FS VIPs are economically viable to be used in high-rise office buildings despite their higher initial cost and decreasing thermal performance over service life.

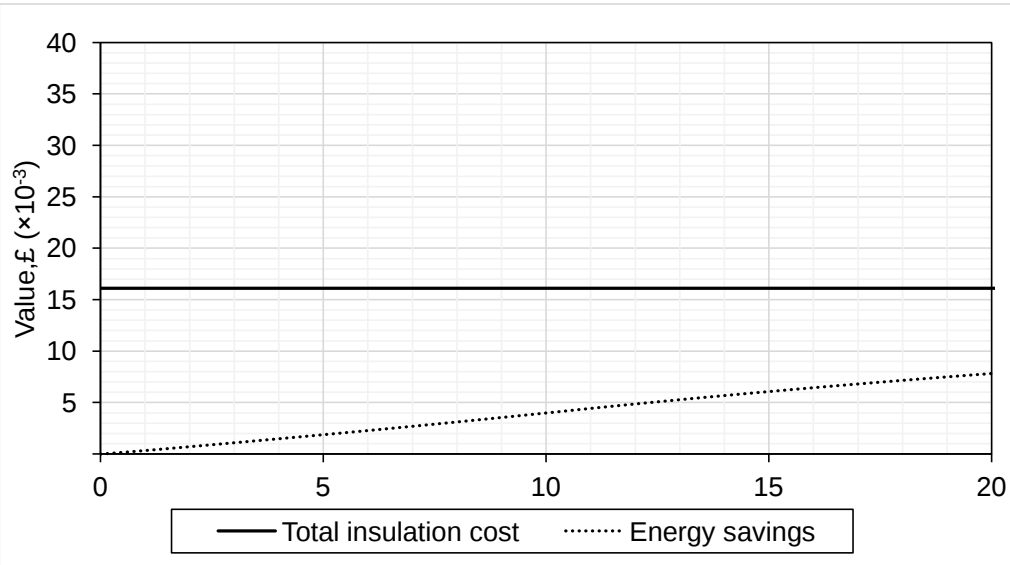
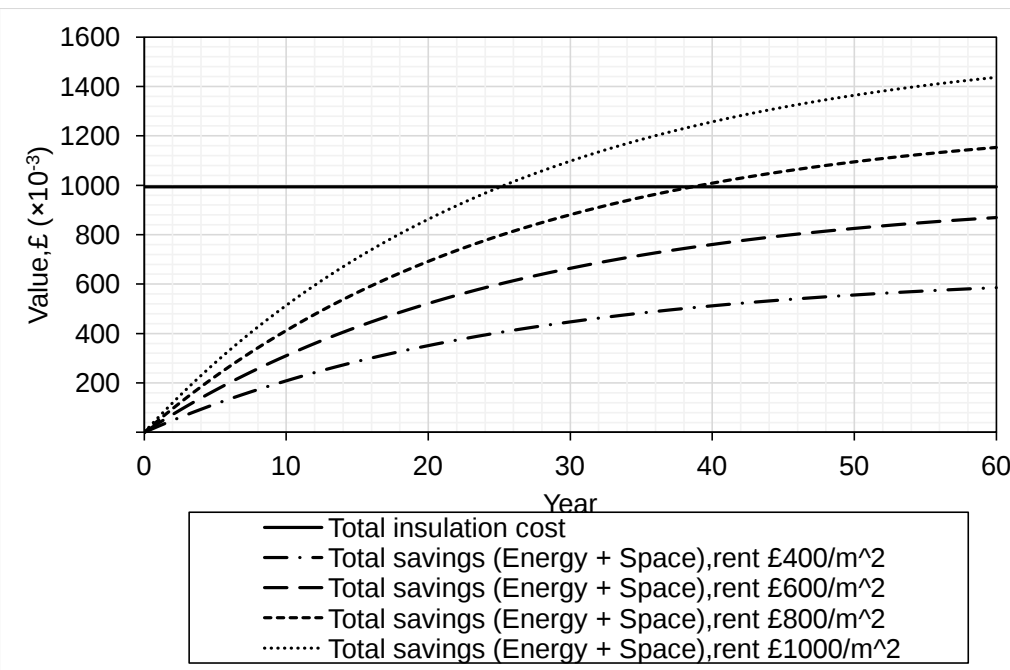


Figure 12. Cost and savings of applying EPS insulation in the 6 storey office building studied



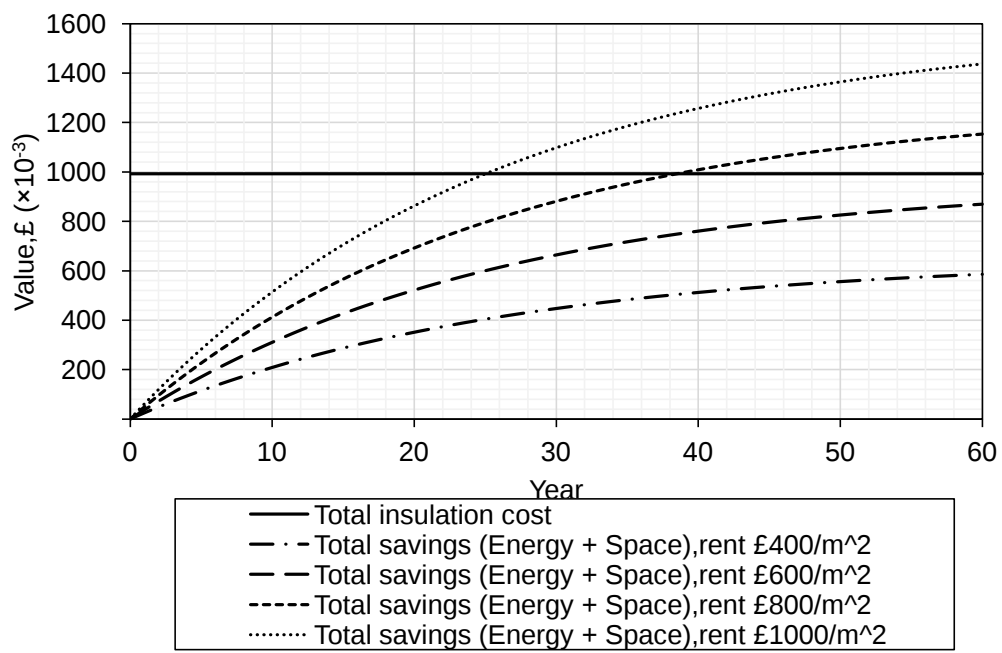


Figure 13. Cost and savings of applying GF VIP insulation in the 6 storey office building studied

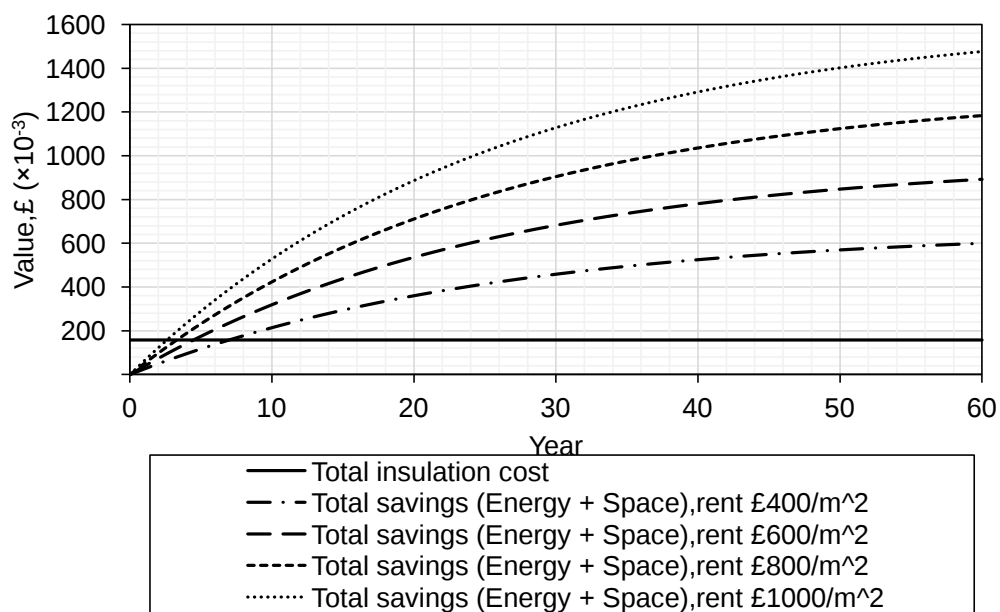
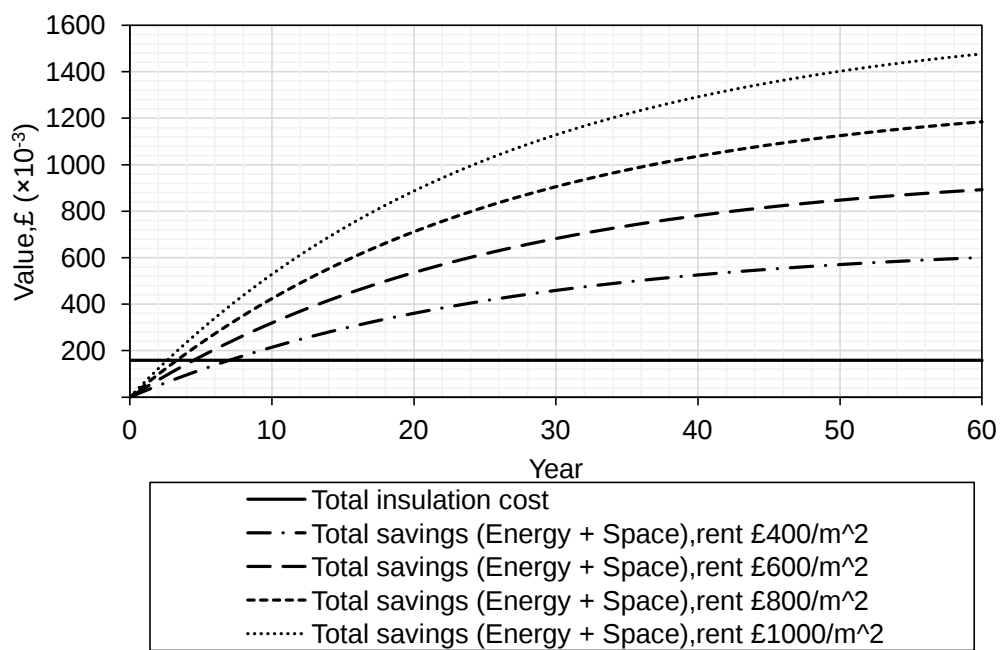


Figure 14. Cost and savings of applying FS VIP insulation in the 6 storey office building studied

7 Conclusions

In this study the energy savings and economic performance of Glass fibre (GF) and Fumed silica (FS) VIPs when used ~~infor retrofitting~~ three non-domestic UK buildings ~~have been to meet current building standards was~~ evaluated and compared ~~withto~~ that of conventional insulation, expanded polystyrene (EPS). Installing VIP insulation ~~have been shown to save resulted in~~ space heating energy savings of 1395.3 MWh, 1661.2 MWh and 3391.6 MWh for a six storey office building, a two floor retail unit building and a four storey office building respectively over a life time of 60 years. ~~A methodology to predict the payback period for VIP insulation has been proposed as well. The proposed methodology is capable of taking into account the change in thermal conductivity of VIPs with time, variable fuel costs and revenues generated from space savings.~~ GF VIP was found to have a higher total cost than FS VIP due to its ~~short~~shorter service life requiring more frequent replacement, once every 10 years. An interesting finding is that EPS insulation cannot even recover its cost over its useful lifetime for all three buildings. Similarly, GF VIPs could not recover their cost ~~infor~~ the case of the 4 storey office building. FS VIPs in comparison with EPS insulation and GF VIPs ~~are found to have had~~ shorter payback periods due to their longer service life of 60 years. This is despite of FS VIPs being 1.6 times more expensive than GF VIPs. This is a remarkable result establishing the economic viability of using FS VIPs in non-domestic buildings located in high rental value locations around the world, such as London. Longevity has been found to be a critical factor in determining the economic viability of VIPs. It has been shown that despite a higher initial cost a longer lifespan VIP will achieve a shorter payback period. A methodology to predict the payback period for VIP insulation has been proposed. An all-inclusive equation capable of taking into account the change in VIP thermal conductivity with time, variable fuel costs and revenues generated from space savings to predict payback year of VIP insulation was presented. The equation can be easily solved on a spreadsheet to estimate the payback period for VIP insulation for any installation irrespective of application, buildings (domestic or non-domestic), refrigerators, freezers and refrigerated vans among many others.

Formatted: Left

8 References

- [1] United Nations Framework Convention on Climate Change UNFCCC (2016). Adoption of the Paris Agreement- Proposal by the President (Draft decision -/CP.21), Conference of the Parties, Twenty-first session Paris, 30 November to 11 December 2015. Available from <http://unfccc.int/resource/docs/2015/cop21/eng/l09r01.pdf>, [Accessed on 11 September 2016]
- [2] Committee on Climate Change (CCC) (2013). Fact sheet: Buildings http://www.theccc.org.uk/wp-content/uploads/2014/08/Factsheetbuildings2014_Final1.pdf [Accessed on 19 October 2015].

Formatted: Left

- [3] Climate Change Act (2008).
http://www.opsi.gov.uk/acts/acts2008/pdf/ukpga20080027_en.pdf [Accessed on 19 June 2016].
- [4] Department of Energy and Climate Change (DECC), (2012). The Future of Heating: A strategic framework for low carbon heat in the UK,
https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/48574/4805-future-heating-strategic-framework.pdf [Accessed on 13 August 2016].
- [5] Brunner S.-and., Simmler H. (2008). In situ performance assessment of vacuum insulation panels in a flat roof construction. *Vacuum*, 82, 700-707.
- [6] Alotaibi S.S.-and., Riffat S. (2014). Vacuum insulated panels for sustainable buildings: a review of research and applications. *International Journal of Energy Research*, 38, 1-19.
- [7] Kalnæs S.E.-and., Jelle B.P. (2014). Vacuum insulation panel products: A state-of-the-art review and future research pathways. *Applied Energy*, 116, 355–375.
- [8] Jang C., Jung H., Lee J., Song T.H. (2013). Radiative heat transfer analysis in pure scattering layers to be used in vacuum insulation panels. *Applied Energy*, 111, 703-709.
- [9] Nussbaumer T., Wakili K.G., Tanner Ch. (2006). Experimental and numerical investigation of the thermal performance of a protected vacuum-insulation system applied to a concrete wall. *Applied energy*, 83, 841-855
- [10] Alam M., Singh H., Limbachiya M.C. (2011). Vacuum Insulation Panels (VIPs) for building construction industry - A review of the contemporary developments and future directions. *Applied Energy*, 88, 3592 - 3602.
- [11] Kucukpinara E., Miesbauera O., Carmib Y., Frickec M., Gullbergd L., Erkeye C., Caps R., Rochefortg M., Morenoh A.G., Delgadoi C., Koehlj M., Holdsworthk P., Klaus Nollera K. (2015). Development of Transparent and Opaque Vacuum Insulation Panels for Energy Efficient Buildings. *Energy Procedia*, 78, 412 – 417.
- [12] Sun Y., Wu Y, Wilson R., Sun S. (2016). Thermal evaluation of a double glazing façade system with integrated Parallel Slat Transparent Insulation Material (PS-TIM). *Building and Environment*, 105, 69 - 81.
- [13] Brunner S., Wakili K.G., Stahl T.-and., Binder B. (2014). Vacuum insulation panels for building applications - continuous challenges and developments. *Energy and Buildings*, 85, 592-596.

Formatted: German (Germany)

Formatted: English (United Kingdom)

Formatted: Left

Formatted: Left

699
700 | ~~[1014]~~ Singh H., Geisler M. ~~and~~, Menzel F. (2015). Experimental investigations into
701 thermal transport phenomena in vacuum insulation panels (VIPs) using fumed silica
702 cores. Energy and Buildings, 107, 76–83.

703 | ~~[1115]~~ Nemanič V. ~~and~~, Žumer M. (2015). New organic fiber-based core material for
704 vacuum thermal insulation. Energy and Buildings, 90, 137-141.

705 | ~~[1216]~~ Alam M., Singh H., Brunner S. ~~and~~, Naziris C. (2014). Experimental
706 characterisation and evaluation of the thermo-physical properties of expanded perlite
707 - fumed silica composite for effective vacuum insulation panel (VIP) core. Energy
708 and Buildings, 69, 442- 450.

709 | ~~[1317]~~ Nemanič V., Zajec B., Žumer M., Figar N., Kavšek M. ~~and~~, Mihelič I., (2014).
710 Synthesis and characterization of melamine-formaldehyde rigid foams for vacuum
711 thermal insulation. Applied Energy, 114, 320-326.

712
713 | ~~[1418]~~ Karami P., Afriyie E.T., Norberg P. ~~and~~, Gudmundsson K. (2014). A study of
714 the thermal conductivity of granular silica materials for VIPs at different levels of
715 gaseous pressure and external loads. Energy and Buildings, 85, 199-211.

716
717 | ~~[1519]~~ Kim J., Lee J.H. ~~and~~, Song T.H. (2012). Vacuum insulation properties of
718 phenolic foam. International Journal of Heat and Mass Transfer, 55, 5343-5349.

719
720 | ~~[16]~~ Cho K., Hong Y. ~~and~~ ~~[20]~~ Li C.D., Saeed M.U., Pan N., Chen Z.F., Xu T.Z.
721 (2016). Fabrication and characterization of low-cost and green vacuum insulation
722 panels with fumed silica/rice husk ash hybrid core material. Materials and Design,
723 107, 440-449.

724
725 | ~~[21]~~ Cho K., Hong Y., Seo J. (2014). Assessment of the economic performance of
726 vacuum insulation panels for housing projects. Energy and Buildings, 70, 45-51.

727 | ~~[17]~~ Alam M., Singh H. ~~and~~ ~~[22]~~ Limbachiya M.C. (2011). Vacuum Insulation Panels
728 (VIPs) for building construction industry – A review of the contemporary
729 developments and future directions, Applied Energy, 88, 3592–3602.

730 | ~~[18]~~ Tenpierik M.J. (2009). Vacuum insulation panels applied in building
731 constructions (VIP ABC). Ph.D. Thesis, Delft University of Technology, Delft,
732 Netherlands.

733
734 | ~~[19]~~ ~~[23]~~ Mujeebu M.A., Ashraf N., Alsuwayigh H.A. (2016a). Effect of nano vacuum
735 insulation panel and nanogel glazing on the energy performance of office building.
736 Applied energy, 173, 141-151.

737

Formatted: Left

Formatted: Font color: Text 1,
Border: : (No border), Pattern: Clear

Formatted: Left, Line spacing: single,
Font Alignment: Auto, Pattern: Clear

738 [24] Mujeebu M.A., Ashraf N., Alsuwayigh H.A. (2016b). Energy performance and
739 economic viability of nano aerogel glazing and nano vacuum insulation panel in
740 multi-story office building. Energy, 113, 949-956.
741
742 [25] va-Q-tec AG (2016).
743 <http://www.va-q-tec.com/en/products-industries/construction/products.html>
744 [Accessed on 19 August 2016].
745
746 [2026] Di X., Gao Y., Bao C., Hu Y. ~~and.~~, Xie Z. (2013). Optimization of glass fiber
747 based core materials for vacuum insulation panels with laminated aluminum foils as
748 envelopes. Vacuum, 97, 55-59
749
750 [24][27] Dylewski R., Adamczyk J. (2012). Economic and ecological indicators for
751 thermal insulating building investments. Energy and Buildings, 54,88–95.
752
753 [28] The Chartered Institution of Building Services Engineers (CIBSE) (2015).
754 Environmental design-CIBSE Guide A. Eighth edition; The Chartered Institution of
755 Building Services Engineers, London.
756
757 [2229] Department of Energy and Climate Change (DECC) (2015). DECC 2015
758 Fossil Fuel Price Assumptions.
759 https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/477958/2015_DECC_fossil_fuel_price_assumptions.pdf [Accessed on 17 August 2016].
760
761 [2330] http://www.degreedays.net/ [Accessed on 17 August 2016].
762
763 [2431] Simmler H, Brunner S. (2005). Vacuum insulation panels for building
764 application: Basic properties, aging mechanisms and service life. Energy and
765 Buildings, 37, 1122- 1131.
766
767 [25][32] Pout C., Moss S. and Davidson P. J. (1998). Non-domestic buildings energy
768 fact file. 1-86081-205-8, BRE Press.
769
770 [33] Building Regulations (2010). Approved Document L1A: Conservation of fuel and
771 power in new dwellings), London. NBS
772
773 [2634] Department for Business, Energy & Industrial strategy (2016). 2016
774 Government GHG Conversion Factors for Company Reporting: Methodology Paper
775 for Emission Factors.
776 https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/553488/2016_methodology_paper_Final_V01-00.pdf [Accessed on 24 September 2016].
777
778 ~~[27] Pout C., Moss S. and Davidson P. J. (1998). Non-domestic buildings energy fact~~
~~file. 1-86081-205-8, BRE Press.~~

Formatted: Left

Formatted: Font color: Text 1, English (United Kingdom), Border: : (No border)

Formatted: Left, Line spacing: single

Formatted: Left

Formatted: Left

Formatted: Pattern: Clear

Formatted: Left, Font Alignment: Auto

Formatted: Left

Formatted: Kern at 18 pt, Pattern: Clear (White)

Formatted: Left, Font Alignment: Baseline

Formatted: Left

Formatted: Left

779 |
780 | [2835] Colliers International (2014). Research & Forecast Report UK GB Retail
781 | Report Autumn 2014.
782 | [29
783 | [36] Find a London Office (2016). London Office Rent: Our Definitive Rental Guide –
784 | Updated for 2016 Q2. <https://www.findalondonoffice.co.uk/toolbox/rental-guide/>
785 | [Accessed on 21 August 2016].
786 |

Formatted: Kern at 18 pt, Pattern: Clear (White)

Formatted: Left, Font Alignment: Baseline

Formatted: Left

Formatted: Left