



Article submitted to journal

**Subject Areas:**

applied mathematics, mechanics

**Keywords:**

elastic plate, composite, asymptotic, Rayleigh wave, hyperbolic equation

**Author for correspondence:**

J. Kaplunov

e-mail: [j.kaplunov@keele.ac.uk](mailto:j.kaplunov@keele.ac.uk)

# Composite Wave Models for Elastic Plates

Bariş Erbaş<sup>1</sup>, Julius Kaplunov<sup>2</sup>, Evgeniya Nolde<sup>3</sup> and Melike Palsü<sup>1</sup>

<sup>1</sup> Anadolu University, Department of Mathematics, Yunus Emre Campus, 26470, Eskisehir, Turkey

<sup>2</sup> School of Computing and Mathematics, Keele University, Keele, Staffordshire, ST5 5BG, UK

<sup>3</sup> Department of Mathematics, CEDPS, Brunel University London, Uxbridge UB8 3PH, UK.

The long-term challenge of formulating an asymptotically motivated wave theory for elastic plates is addressed. Composite 2D models merging the leading or higher-order parabolic equations for plate bending and the hyperbolic equation for the Rayleigh surface wave are constructed. Analysis of numerical examples shows that the proposed approach is robust not only at low and high-frequency limits but also over the intermediate frequency range.

## 1. Introduction

A substantial fresh interest in mechanics of thin elastic structures, inspired by demands of modern advanced technologies, is strongly focused on modelling of microscale phenomena, e.g. see recent publications [1–5]. At the same time, the long standing problem, concerned with derivation of a 2D hyperbolic plate theory supporting an asymptotically consistent short-wave behaviour, is not yet solved even in the context of linear isotropic elasticity.

The classical Kirchhoff plate theory is governed by a fourth-order equation, which may be classified as parabolic [6]. As a consequence, it does not predict a finite wave speed limit resulting in a formal violation of the causality principle. However, as the leading long-wave low-frequency approximation of 3D equations in elasticity, e.g. see [7–9], the Kirchhoff equation is not assumed to be valid near wave fronts dominated by short-wave high-frequency patterns. Causality of long-wave models was also discussed for periodic media, including discrete chains [10–12]. In fact, as it was

demonstrated in [13], the asymptotic methodologies underlying thin and periodic structures appear to have a lot in common.

Refined ad-hoc plate formulations, including Timoshenko–Reissner–Mindlin type theories as well as numerous later considerations, often start from hyperbolic equations, see general reference works [14,15] and also papers [16,17]. Simultaneously, hyperbolicity of all of them is rather a type of a side effect related to incorporating of certain long-wave corrections like shear deformation and rotation inertia, but not the result of adapting a proper short-wavelength asymptotic limit. The wave speeds within various versions of refined ad-hoc theories may either coincide with bulk and surface wave speeds in a 3D elastic solid or take slightly different values, see [14]. A heuristic nature of the arguments supporting existing hyperbolic formulations is appreciated in [18] combining them with a long-wave variational-asymptotic approach.

The main challenge of constructing asymptotically consistent 2D hyperbolic theories is that the equations of short-wave approximations in question generally have to retain derivatives with respect to the third (thickness) variable. In particular, for a semi-infinite thin shell of revolution subject to edge impact loading, these equations take the form of plane and anti-plane problems in elasticity over the transverse cross-section of the shell, see [9] and also specialized monograph [19] published in Russian. Obviously, plane and anti-plane problems preserve the correct values of 3D bulk wave speeds. Their solutions may be matched with those of the Kirchhoff–Love theory of shells, which is valid outside wavefront vicinities.

A new prospect for deriving 2D hyperbolic equations has recently arisen due to the development of the asymptotic hyperbolic-elliptic model for the surface Rayleigh wave, see [20,21] and references therein. It is very crucial for our purposes that it operates with an explicit 2D wave equation along the surface. In this case, 3D ‘static’ elliptic equations have to be solved over the interior. The model is derived by perturbing the inhomogeneous equations in elasticity around the Rayleigh wave eigen-solution originally obtained in [22,23]. We also mention more recent publications [24,25] dealing with free surface waves of an arbitrary profile. Although the aforementioned model assumes near-resonant loading, it also allows one to determine the Rayleigh wave contribution to the overall response in case of a more general excitation. It was successfully implemented for a number of dynamic problems for point and moving surface sources [26–28].


In this paper, we attempt to establish 2D composite hyperbolic equations for an elastic plate using Kirchhoff or refined asymptotic plate equations along with the Rayleigh wave equation, see [29,30] regarding the idea of composite equations incorporating both long and short-wave limiting forms, for which a typical wavelength is much greater or smaller than the plate thickness. We restrict ourselves to surface loading, when bending and Rayleigh waves are seemingly of the most importance. In contrast to examples in [29], we do not expect from the very beginning to arrive at uniformly valid composite equations. The point is that over the intermediate range, for which a wavelength is of order of thickness, a plate demonstrates essentially 3D behaviour, which does not allow any asymptotic dimension reduction.

The paper is organized as follows. The governing equations are written down in Section 2. In this section, the Kirchhoff plate equation as well as its asymptotic refinement are rewritten through surface displacements. Also, the 2D hyperbolic equation for the Rayleigh wave, initially derived for the surface wave potentials, is presented in terms of displacements. It is worth noting that the right-hand side of the hyperbolic equation for the vertical displacement contains a pseudo-differential operator acting on prescribed normal surface stresses. In Section 3, we begin with analysis of dispersion relations. Along with the simplest composite relation based on the Kirchhoff equation, we also suggest a more sophisticated one corresponding to the refined plate equation. The composite dispersion relations are tested by comparison with the results of the numerical evaluation of the fundamental Rayleigh–Lamb antisymmetric mode. In Section 4, using a preliminary insight from the previous section, we establish hyperbolic composite equations starting, again, from both Kirchhoff and refined plate theories combined with the Rayleigh wave model. Leading order composite equations are presented in terms of both vertical and horizontal

displacements. In addition, a refined composite equation is obtained for vertical displacement. In Section 5, the solutions of the composite equations are compared with those of the associated plane strain problem given in the Appendix. Surface loading in the form of a plane time-harmonic wave is considered.

## 2. Statement of the problem

Consider antisymmetric deformation of an elastic layer of thickness  $2h$  ( $-\infty \leq x_1, x_2 \leq \infty$ ,  $-h \leq x_3 \leq h$ ) subject to prescribed normal stresses  $\pm \frac{1}{2}P(x_1, x_2, t)$  at faces  $x_3 = \pm h$ , see Figure 1, starting from shortened forms of 3D dynamic equations in linear elasticity exposed, in particular, in the paper [7], the book [9], and in the annual volume chapter [21]; in this section we use the results of these publications without further reference to them.

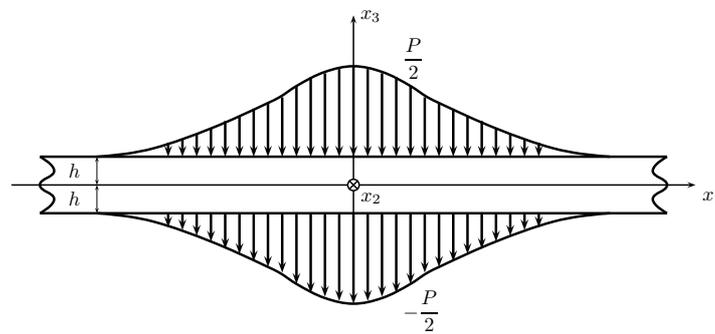

**Figure 1.** Antisymmetric deformation of an elastic layer under surface loading

Let us first write down the 2D equations governing the long-wave low-frequency approximations, for which

$$L \gg h \quad \text{and} \quad T \gg \sqrt{\frac{\rho}{E}}h, \quad (2.1)$$

where  $L$  and  $T$  are typical wavelength and time scale, respectively,  $E$  is Young's modulus, and  $\rho$  is mass density.

It is well known that the leading order long-wave low-frequency approximation corresponds to the classical Kirchhoff theory for plate bending resulting in the fourth-order parabolic equation

$$D\Delta^2 w + 2\rho h \frac{\partial^2 w}{\partial t^2} = P, \quad (2.2)$$

where  $w(x_1, x_2, t)$  is vertical displacement of midplane  $x_3 = 0$ ,  $t$  is time,  $\Delta = \partial^2/\partial x_1^2 + \partial^2/\partial x_2^2$  is the 2D Laplacian in variables  $x_1$  and  $x_2$ , and bending stiffness  $D$  is given by

$$D = \frac{2Eh^3}{3(1-\nu^2)},$$

with  $\nu$  denoting Poisson's ratio. At  $P = 0$  we have from equation (2.2)

$$\frac{T}{h} \sqrt{\frac{E}{\rho}} \sim \frac{L^2}{h^2}. \quad (2.3)$$

We suppose that this condition also holds at  $P \neq 0$ , unless stated otherwise. Therefore, we may operate with a single small geometric parameter  $\eta = \frac{h}{L} \ll 1$ .

At next order, we have the refined equation

$$D\Delta^2 w + 2\rho h \left(1 + h^2 \frac{7\nu - 17}{15(1-\nu)} \Delta\right) \frac{\partial^2 w}{\partial t^2} = \left(1 - h^2 \frac{8 - 3\nu}{10(1-\nu)} \Delta\right) P, \quad (2.4)$$

where the extra terms in brackets are of order  $O(\eta^2)$ , cf. (2.2).

Simultaneously, we rely here on the asymptotic formulation for the Rayleigh wave, which, in contrast to (2.1), is valid at

$$L \ll h \quad \text{and} \quad T \ll \sqrt{\frac{\rho}{E}} h. \quad (2.5)$$

At leading order, this is given by a 2D hyperbolic equation along each of the faces  $x_3 = \pm h$ ; due to symmetry of the problem, below we consider only the upper face  $x_3 = h$ . In terms of the boundary value of longitudinal wave potential  $\Phi(x_1, x_2, x_3, t)$ , see e.g. [31], we have

$$\Delta\Phi_h - \frac{1}{c_R^2} \frac{\partial^2 \Phi_h}{\partial t^2} = -\frac{(1 + k_2^2)P}{4\mu B}, \quad (2.6)$$

where  $\Phi_h = \Phi(x_1, x_2, h, t)$ ,  $\mu$  is Lamé elastic modulus,  $c_R$  is Rayleigh wave speed and

$$B = \frac{k_1}{k_2} (1 - k_1^2) + \frac{k_2}{k_1} (1 - k_2^2) - (1 - k_2^4).$$

In the above  $k_i = \sqrt{1 - \frac{c_R^2}{c_i^2}}$ ,  $i = 1, 2$ , with  $c_i$  denoting longitudinal and shear wave speeds. This equation is initially oriented to near resonant loading implementing

$$\Delta P - \frac{1}{c_R^2} \frac{\partial^2 P}{\partial t^2} \ll \frac{P}{L^2}, \quad (2.7)$$

but also handles the Rayleigh wave contribution to the general dynamic response. Condition (2.7), for example, holds for a plane harmonic wave with wavelength  $L$  and phase velocity close to  $c_R$ .

Over the interior ( $|x_3| < h$ ) longitudinal potential  $\Phi(x_1, x_2, x_3, t)$  satisfies the 'static' elliptic equation

$$\frac{\partial^2 \Phi}{\partial x_3^2} + k_1^2 \Delta \Phi = 0, \quad (2.8)$$

whereas a pair of shear potentials  $\Psi_i(x_1, x_2, x_3, t)$ ,  $i = 1, 2$ , may be found from the boundary value problem

$$\frac{\partial^2 \Psi_i}{\partial x_3^2} + k_2^2 \Delta \Psi_i = 0, \quad (2.9)$$

with

$$\frac{\partial \Psi_i}{\partial x_3} \Big|_{x_3=h} = \frac{1 + k_2^2}{2} \frac{\partial \Phi_h}{\partial x_i}. \quad (2.10)$$

Hyperbolic equation (2.6) may be also rewritten through the displacements of the upper face  $u_n(x_1, x_2, t)$ ,  $n = 1, 2, 3$ . To this end, we express the solutions of elliptic equations (2.8) and (2.9) as

$$\Phi = \Phi_h e^{\sqrt{-\Delta} k_1 (x_3 - h)} \quad \text{and} \quad \Psi_i = \Psi_{ih} e^{\sqrt{-\Delta} k_2 (x_3 - h)}, \quad (2.11)$$

where  $\sqrt{-\Delta}$  is a 2D pseudo-differential operator and  $\Psi_{ih} = \Psi_i(x_1, x_2, h, t)$ . Then, taking into account boundary condition (2.10) and also the relation

$$\frac{\partial \Phi}{\partial x_3} \Big|_{x_3=h} = -\frac{1 + k_2^2}{2} \left( \frac{\partial \Psi_{1h}}{\partial x_1} + \frac{\partial \Psi_{2h}}{\partial x_2} \right), \quad (2.12)$$

we obtain

$$u_i = \frac{\partial \Psi_i}{\partial x_3} \Big|_{x_3=h} - \frac{\partial \Phi_h}{\partial x_i} = -\frac{1 - k_2^2}{2} \frac{\partial \Phi_h}{\partial x_i}, \quad i = 1, 2, \quad (2.13)$$

and

$$u_3 = \frac{\partial \Phi}{\partial x_3} \Big|_{x_3=h} + \frac{\partial \Psi_{1h}}{\partial x_1} + \frac{\partial \Psi_{2h}}{\partial x_2} = \frac{k_1(1-k_2^2)}{1+k_2^2} \sqrt{-\Delta} \Phi_h. \quad (2.14)$$

Finally, with the help of these formulae, we transform (2.6) to the form

$$\Delta u_i - \frac{1}{c_R^2} \frac{\partial^2 u_i}{\partial t^2} = -\frac{(1-k_2^4)}{8\mu B} \frac{\partial P}{\partial x_i}, \quad i=1,2 \quad (2.15)$$

or

$$\Delta u_3 - \frac{1}{c_R^2} \frac{\partial^2 u_3}{\partial t^2} = -\frac{k_1(1-k_2^2)}{4\mu B} \sqrt{-\Delta} P. \quad (2.16)$$

It is remarkable that the last equation contains pseudo-differential operator  $\sqrt{-\Delta}$  acting on the prescribed stress. Such form of the equation of motion does not seem to be traditional in solid mechanics.

Similar to the Rayleigh wave equations (2.15) and (2.16), plate bending equation (2.4) can also be rewritten in terms of the displacements at the upper face  $x_3 = h$  starting from the relations

$$u_i = \mathcal{L}_i \frac{\partial w}{\partial x_i} \quad \text{and} \quad u_3 = \mathcal{L}_3 w, \quad i=1,2, \quad (2.17)$$

where differential operators  $\mathcal{L}_i$  and  $\mathcal{L}_3$  are defined as

$$\mathcal{L}_i = -h \left\{ 1 + h^2 \left( \frac{\nu+4}{6(1-\nu)} \frac{\partial^2}{\partial x_i^2} - \frac{5\nu}{6(1-\nu)} \frac{\partial^2}{\partial x_j^2} \right) \right\}, \quad i,j=1,2, i \neq j,$$

and

$$\mathcal{L}_3 = 1 + h^2 \frac{\nu}{2(1-\nu)} \Delta. \quad (2.18)$$

Acting with (2.18) on (2.4) and neglecting  $O(\eta^4)$  terms, we get

$$\begin{aligned} D\Delta^2 u_i + 2\rho h \left( 1 + h^2 \frac{7\nu-17}{15(1-\nu)} \Delta \right) \frac{\partial^2 u_i}{\partial t^2} &= \\ &= -h \left\{ 1 + h^2 \left( \frac{\nu+4}{6(1-\nu)} \frac{\partial^2}{\partial x_i^2} - \frac{5\nu}{6(1-\nu)} \frac{\partial^2}{\partial x_j^2} - \frac{8-3\nu}{10(1-\nu)} \Delta \right) \right\} \frac{\partial P}{\partial x_i}, \end{aligned} \quad (2.19)$$

and

$$D\Delta^2 u_3 + 2\rho h \left( 1 + h^2 \frac{7\nu-17}{15(1-\nu)} \Delta \right) \frac{\partial^2 u_3}{\partial t^2} = \left( 1 - h^2 \frac{4}{5} \Delta \right) P. \quad (2.20)$$

It is obvious that within the Kirchhoff theory we just need to neglect  $O(\eta^2)$  terms in all formulae (2.17)–(2.20).

Our goal is to establish 2D composite wave models containing plate bending and Rayleigh wave equations as their asymptotic long-wave low-frequency and short-wave high-frequency limits corresponding to (2.1) and (2.5), respectively. At the same time, we cannot expect such composite models to be able to pick up the asymptotic behaviour of the original 3D problem within the intermediate range

$$L \sim h \quad \text{and} \quad T \sim \sqrt{\frac{\rho}{E}} h. \quad (2.21)$$

This assumption agrees with the general idea of composite equations originally formulated in [29], see also more recent book [30], not excluding the possibility of asymptotically non-uniform composite theories.

### 3. Dispersion Analysis

It appears to be natural to begin with the analysis of dispersion relations. To this end, we study the plane travelling wave solutions to the homogeneous equations ( $P=0$ ) in the previous section

in the form  $\exp[i(kx_1 - \omega t)]$  with angular frequency  $\omega$  and wave number  $k$ . In this case, typical wavelength and timescale are defined as  $L \sim k^{-1}$  and  $T \sim \omega^{-1}$ . First, we substitute the travelling wave solution into equations (2.2) and (2.6) at  $P = 0$  having

$$K^4 - \frac{3(1-\nu)}{2}\Omega^2 = 0, \quad (3.1)$$

and

$$K^2 - \frac{\Omega^2}{v_R^2} = 0, \quad (3.2)$$

where

$$K = kh \quad \text{and} \quad \Omega = \frac{\omega h}{c_2}, \quad (3.3)$$

with  $v_R = c_R/c_2$  denoting the dimensionless Rayleigh wave speed.

It is obvious that the problem of constructing composite relations does not have a unique solution. Here, by inspecting (3.1) and (3.2) we may readily suggest a very simple composite dispersion relation given by

$$K^4 - \frac{3(1-\nu)}{2}\Omega^2 - \frac{\Omega^4}{v_R^4} = 0. \quad (3.4)$$

At the long-wave low-frequency limit, in which  $\Omega \sim K^2$ , the last term on the right-hand side of (3.4) is of order  $O(\eta^2)$  and may be ignored at leading order, since  $\eta = K \ll 1$ . Therefore, we arrive at dispersion relation (3.1). On the contrary, at the Rayleigh wave limit ( $\Omega \sim K \gg 1$ ) we may neglect the middle term, which is of order  $O(K^{-2})$ , arriving at another shortened dispersion relation (3.2).

Next, we obtain a refined composite dispersion relation combining (3.2) with

$$K^4 - \frac{3(1-\nu)}{2}(1 - \delta K^2)\Omega^2 = 0, \quad (3.5)$$

where

$$\delta = \frac{7\nu - 17}{15(1-\nu)}. \quad (3.6)$$

Approximate formula (3.5) arises from homogeneous refined plate equation (2.4). The sought for composite relation may be written as

$$K^4 - \frac{3(1-\nu)}{2}(1 - \delta K^2)\Omega^2 + \gamma K^2 \Omega^2 \left( K^2 - \frac{\Omega^2}{v_R^2} \right) = 0, \quad (3.7)$$

where  $\gamma$  is a constant parameter to be found. Expressing from this equation  $K^2$  we have

$$K^2 = \frac{1}{2(1+\gamma\Omega^2)} \left\{ - \left( \frac{3(1-\nu)\delta}{2} - \gamma \frac{\Omega^2}{v_R^2} \right) \Omega^2 + \sqrt{\left( \frac{3(1-\nu)\delta}{2} - \gamma \frac{\Omega^2}{v_R^2} \right)^2 \Omega^4 + 6(1-\nu)(1+\gamma\Omega^2)\Omega^2} \right\}. \quad (3.8)$$

The latter may be expanded at  $\Omega \ll 1$ , leading to

$$K^2 = \frac{3(1-\nu)}{2}\Omega^2 \left\{ 1 + \sqrt{\frac{3(1-\nu)}{2}}\delta\Omega + \left( \frac{3\delta^2(1-\nu)}{4} - \gamma \right) \Omega^2 + \dots \right\}. \quad (3.9)$$

Now, we require the last formula to coincide with the asymptotic expansion of the Rayleigh–Lamb dispersion equation for the bending mode

$$D_{RL}(K, \Omega) = 0, \quad (3.10)$$

with  $D_{RL}$  given by (A.7) in the Appendix; see considerations in [9, Section 7.5]. As a result we have

$$\gamma = \frac{422 - 424\nu - 33\nu^2}{1050(1 - \nu)}. \quad (3.11)$$


It might easily be verified that at  $\Omega \sim K^2 \ll 1$  formula (3.7) to within  $O(\eta^4)$  coincides with dispersion relation (3.5) corresponding to refined plate equation (2.4). As above, neglecting  $O(K^{-2})$  terms, we arrive at (3.2) at the Rayleigh wave limit.

Numerical illustrations are presented in Figures 2–4 and Table 1 for Poisson's ratio  $\nu = 0.25$  for which the positive root of the Rayleigh equation is given, approximately, by  $v_R = 0.9194$ . Figure 2 displays the dispersion curves for relations (3.1), (3.2), and (3.4) plotted by the dotted, dashed, and dash-dotted lines, respectively. Graphic material in this figure is supported by the numerical data in the first, third and fourth columns of the table. The dispersion curves, plotted in Figure 3 by the dotted and dash-dotted lines, correspond to refined plate and composite relations (3.5) and (3.7), respectively, see also associated columns two and five in the table. As might be expected, the deviation between the predictions of composite relation (3.4) and its refined form (3.7) is more substantial at relatively low frequencies, while it is rather minor at the high-frequency limit. The obvious reason is that both composite relations utilise the same Rayleigh wave asymptote.

The accuracy of composite relations (3.4) and (3.7) is tested in Figure 4 by comparison with the numerical solution of the Rayleigh–Lamb equation, see (3.10) with (A.7). Computations for the latter are also presented in the last column of the table. We plot the relative error expressed in terms of percentages as

$$e_r = \left| \frac{K_{RL} - K}{K_{RL}} \right| \times 100\%, \quad (3.12)$$

where  $K_{RL}$  denotes the associated Rayleigh–Lamb root. It is depicted with dashed and solid lines for  $K$  found from composite relations (3.4) and (3.7), respectively. The curves corresponding to composite relations meet that for the Rayleigh–Lamb equation at  $\Omega \approx 3$ . This reduces the approximation error over the intermediate frequency range, which is main concern from the very beginning. To the left of this value, the refined relation has a clear advantage, while to the right of it the difference between (3.4) and (3.7) is not that significant.

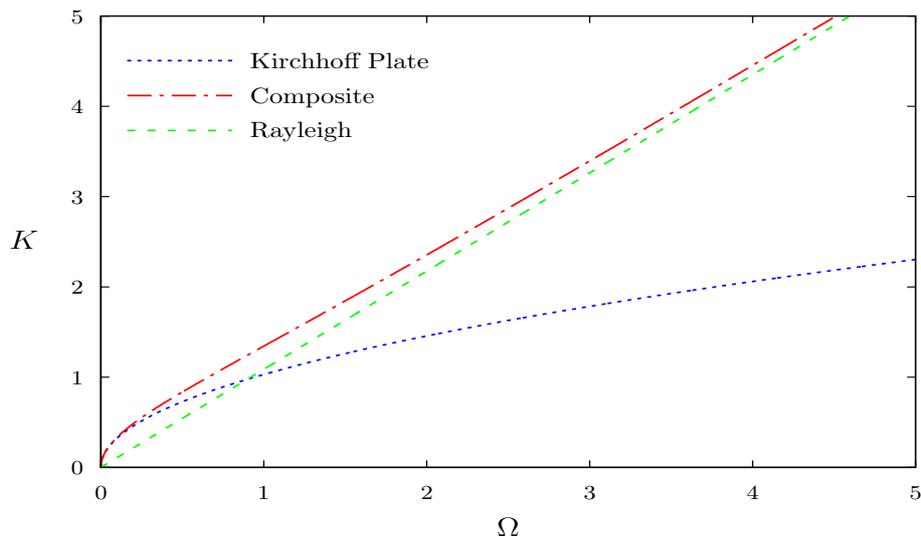

**Figure 2.** Dispersion curves for Kirchhoff equation (3.1), composite equation (3.4), and Rayleigh wave (3.2).

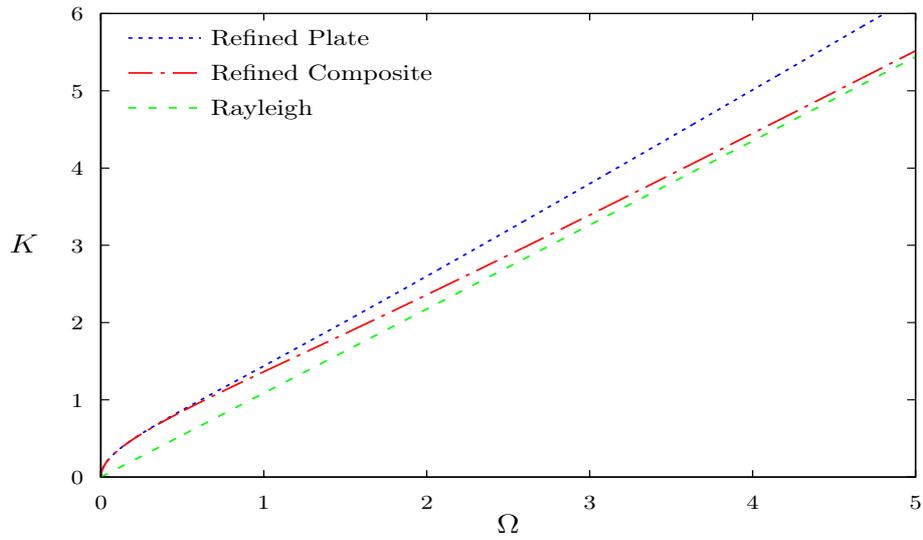


Figure 3. Dispersion curves for refined plate equation (3.5), refined composite equation (3.7), and Rayleigh wave (3.2).

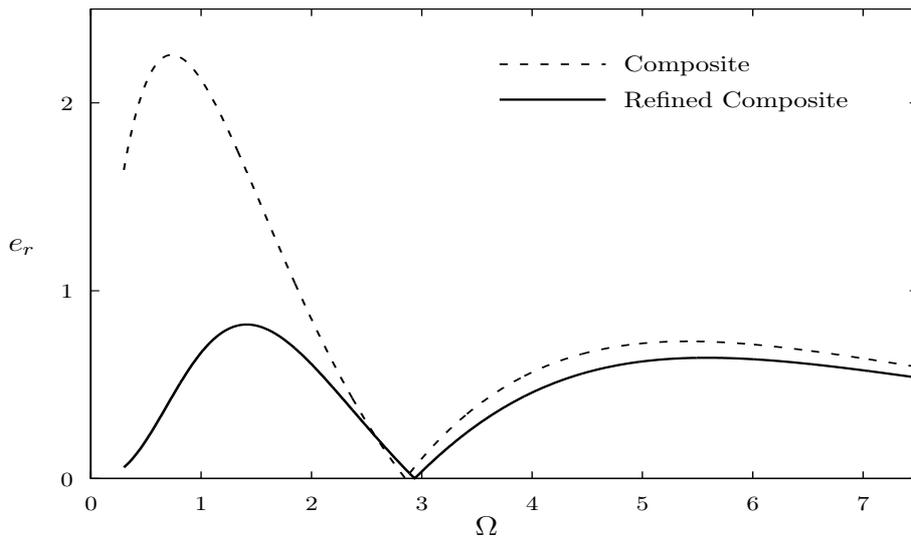


Figure 4. Relative error for composite equation (3.4) and refined composite equation (3.7).

### 4. Composite Equations

Motivated by composite dispersion relation (3.4), we obtain for vertical displacement  $u_3$  along the faces

$$D\Delta^2 u_3 - \frac{D}{c_R^2} \Delta \frac{\partial^2 u_3}{\partial t^2} + 2\rho h \frac{\partial^2 u_3}{\partial t^2} = \left( 1 - h^3 \frac{k_1 (1 - k_2^2)}{3B(1 - \nu)} \sqrt{-\Delta} \right) P, \tag{4.1}$$

starting from inhomogeneous equations (2.2) (written in terms of  $u_3$ ) and (2.16). This simplest composite equation can easily be reduced to the original shortened equations at the long-wave low-frequency and Rayleigh wave limits. First, we scale the original variables in (4.1) setting

$$x_i = \xi_i L, \quad i = 1, 2, \text{ and } t = T\tau. \tag{4.2}$$

$\Omega$	Kirchhoff plate dispersion relation (3.1)	Refined plate dispersion relation (3.5)	Rayleigh wave asymptote (3.2)	Composite dispersion relation (3.4)	Refined composite dispersion relation (3.7)	Rayleigh-Lamb dispersion relation (3.10) with (A.7)
0.1	0.3257	0.3376		0.3349	0.3373	0.3373
0.2	0.4606	0.4948		0.4869	0.4930	0.4931
0.3	0.5641	0.6278		0.6131	0.6229	0.6233
0.4	0.6514	0.7506		0.7276	0.7409	0.7418
0.5	0.7282	0.8684		0.8357	0.8520	0.8537
1	1.030	1.438		1.344	1.364	1.373
1.5	1.261	2.014		1.845	1.858	1.874
2	1.456	2.601		2.355	2.360	2.375
2.5			2.719	2.872	2.872	2.880
3			3.263	3.395	3.393	3.391
4			4.351	4.454	4.449	4.429
5			5.438	5.522	5.517	5.483
6			6.526	6.597	6.592	6.550
8			8.701	8.755	8.751	8.707
10			10.88	10.92	10.92	10.88
11			11.96	12.00	12.00	11.97
12			13.05	13.09	13.08	13.05

**Table 1.** Indicative numerical solutions for exact and approximate dispersion relations.

Then, assuming that  $\eta = \frac{h}{L} \ll 1$  and  $T = \frac{L}{\eta c_2}$ , see (2.1) and (2.3), we have

$$\left( \Delta_* - \eta^2 \frac{1}{v_R^2} \frac{\partial^2}{\partial \tau^2} \right) \Delta_* u_3 + \frac{3(1-\nu)}{2} \frac{\partial^2 u_3}{\partial \tau^2} = \left( 1 + \eta^3 \frac{k_1(1-k_2^2)}{3B(1-\nu)} \sqrt{-\Delta_* \Delta_*} \right) \frac{PL^4}{D}, \quad (4.3)$$

where  $\Delta_* = \partial^2 / \partial \xi_1^2 + \partial^2 / \partial \xi_2^2$ . It is obvious that, to within the error  $O(\eta^2)$ , the last equation coincides with classical Kirchhoff equation (2.2) rewritten in a dimensionless form.

Let now  $\eta = \frac{h}{L} \gg 1$  and  $T = \frac{L}{c_R}$ , see (2.5), resulting in the following transformation of composite equation (4.1)

$$\begin{aligned} \Delta_* \left( \Delta_* u_3 - \frac{\partial^2 u_3}{\partial \tau^2} \right) + \frac{3(1-\nu)}{2} v_R^2 \eta^{-2} \frac{\partial^2 u_3}{\partial \tau^2} &= \\ &= \left( \eta^{-3} + \frac{k_1(1-k_2^2)}{3B(1-\nu)} \sqrt{-\Delta_* \Delta_*} \right) \frac{PL^4 \eta^3}{D}. \end{aligned} \quad (4.4)$$

Neglecting  $O(\eta^{-2})$  terms and then cancelling out operator  $\Delta_*$ , we obtain a dimensionless counterpart of equation (2.16). It also can be verified that the dispersion relation associated with the derived composite equation coincides with dispersion relation (3.4).

Similarly, starting from the leading order form of (2.19), for which  $h^2$  terms in both brackets are neglected, and (2.15), we have composite equations written through tangential displacements  $u_i$  at the upper face. They are

$$D \left( \Delta - \frac{1}{c_R^2} \frac{\partial^2}{\partial t^2} \right) \Delta u_i + 2\rho h \frac{\partial^2 u_i}{\partial t^2} = -h \left( 1 + h^2 \frac{1-k_2^4}{6B(1-\nu)} \Delta \right) \frac{\partial P}{\partial x_i}, \quad i = 1, 2. \quad (4.5)$$

Next, we implement refined plate equation (2.20) and proceed in the same manner as above. Then, a more sophisticated composite equation for vertical displacement may be presented as

$$\begin{aligned} D \left( 1 - h^2 \frac{\gamma}{c_2^2} \frac{\partial^2}{\partial t^2} \right) \Delta^2 u_3 + 2\rho h \left( 1 + h^2 \delta \Delta + h^4 \frac{2\gamma}{3(1-\nu)c_R^2} \Delta \frac{\partial^2}{\partial t^2} \right) \frac{\partial^2 u_3}{\partial t^2} &= \\ &= \left( 1 - h^2 \frac{4}{5} \Delta + \frac{h^5}{c_2^2} \frac{\gamma k_1(1-k_2^2)}{3B(1-\nu)} \sqrt{-\Delta \Delta} \frac{\partial^2}{\partial t^2} \right) P. \end{aligned} \quad (4.6)$$

Again, using proper scalings, it may be shown that equation (4.6) is reduced to its original shortened forms at the long-wave low-frequency and Rayleigh wave limits. In particular, at

low-frequency limit, it takes the form

$$\begin{aligned} \left(1 - \eta^4 \gamma \frac{\partial^2}{\partial \tau^2}\right) \Delta_*^2 u_3 + \frac{3(1-\nu)}{2} \left(1 + \eta^2 \delta \Delta_* + \eta^6 \frac{2\gamma c_2^2}{3(1-\nu)c_R^2} \Delta_* \frac{\partial^2}{\partial \tau^2}\right) \frac{\partial^2 u_3}{\partial \tau^2} = \\ = \left(1 - \eta^2 \frac{4}{5} \Delta_* + \eta^7 \frac{\gamma k_1(1-k_2^2)}{3B(1-\nu)} \sqrt{-\Delta_*} \Delta_* \frac{\partial^2}{\partial \tau^2}\right) \frac{PL^4}{D}. \end{aligned} \quad (4.7)$$

This time let us keep  $O(\eta^2)$  terms, neglecting all the smaller ones, to obtain

$$\Delta_*^2 u_3 + \frac{3(1-\nu)}{2} \left(1 + \eta^2 \delta \Delta_*\right) \frac{\partial^2 u_3}{\partial \tau^2} = \left(1 - \eta^2 \frac{4}{5} \Delta_*\right) \frac{PL^4}{D}. \quad (4.8)$$

This equation is identical to refined plate equation (2.20) rewritten in dimensionless variables. Now, we get from (4.7) at the Rayleigh wave limit

$$\begin{aligned} \left(\eta^{-2} - \gamma \frac{c_R^2}{c_2^2} \frac{\partial^2}{\partial \tau^2}\right) \Delta_*^2 u_3 + \frac{c_R^2}{c_2^2} \frac{3(1-\nu)}{2} \left(\eta^{-4} + \eta^{-2} \delta \Delta_* + \frac{2\gamma}{3(1-\nu)} \Delta_* \frac{\partial^2}{\partial \tau^2}\right) \frac{\partial^2 u_3}{\partial \tau^2} = \\ = \left(\eta^{-5} - \eta^{-3} \frac{4}{5} \Delta_* + \frac{\gamma k_1(1-k_2^2)}{3B(1-\nu)} v_R^2 \sqrt{-\Delta_*} \Delta_* \frac{\partial^2}{\partial \tau^2}\right) \frac{PL^4 \eta^3}{D}. \end{aligned} \quad (4.9)$$

At leading order, the latter becomes

$$\Delta_* \frac{\partial^2}{\partial \tau^2} \left(\Delta_* - \frac{\partial^2}{\partial \tau^2}\right) u_3 = -\frac{L^4 \eta^3}{D} \frac{k_1(1-k_2^2)}{3B(1-\nu)} \sqrt{-\Delta_*} \Delta_* \frac{\partial^2 P}{\partial \tau^2}. \quad (4.10)$$

Finally, cancelling out operator  $\Delta_* \frac{\partial^2}{\partial \tau^2}$ , we have Rayleigh wave equation (2.16) presented in a dimensionless form.

As it might be expected, the dispersion relation corresponding to refined composite equation (4.6) is the same as (3.7).

## 5. Example

As an example, we consider the effect of the surface loads, see Figure 1, in the form of plane time-harmonic travelling waves, for which  $P = P_0 e^{i(k_0 x_1 - \omega t)}$ , where  $k_0 = k_0(\omega)$  is a given function of angular frequency  $\omega$ , corresponding to near-resonant excitation, see (2.7). Let us search for the solution to the differential equations in Sections 2 and 4 also in the form of a plane travelling wave, i.e. take  $u_3 = A \frac{hP_0}{\mu} e^{i(k_0 x_1 - \omega t)}$ , where  $A$  is normalized amplitude.

First, insert  $u_3$  and  $P$  into composite equation (4.1) and its shortened limiting forms (2.2) and (2.16). Then, we have, respectively,

$$A = \frac{3(1-\nu)B + k_1(1-k_2^2)K_0^3}{4B \left(K_0^4 - \frac{1}{v_R^2} K_0^2 \Omega^2 - \frac{3(1-\nu)}{2} \Omega^2\right)}, \quad (5.1)$$

$$A = \frac{3(1-\nu)}{4} \frac{1}{K_0^4 - \frac{3(1-\nu)}{2} \Omega^2}, \quad (5.2)$$

and

$$A = \frac{k_1(1-k_2^2)}{4B} \frac{K_0}{K_0^2 - \Omega^2/v_R^2}, \quad (5.3)$$

where  $K_0 = k_0 h$  and, as before,  $\Omega = \omega h/c_2$ .

Next, insert  $u_3$  and  $P$  into refined composite and plate equations (4.6) and (2.20) to obtain

$$A = \frac{1}{20B} \frac{3(1-\nu)(5+4K_0^2)B + 5k_1(1-k_2^2)\gamma K_0^3 \Omega^2}{(1+\gamma\Omega^2)K_0^4 - \left(\frac{3(1-\nu)}{2} - \frac{7\nu-17}{10}K_0^2 + \frac{\gamma}{v_R^2}K_0^2\Omega^2\right)\Omega^2}, \quad (5.4)$$

and

$$A = \frac{3(1-\nu)}{20} \frac{5+4K_0^2}{K_0^4 - \frac{3(1-\nu)}{2}(1-\delta K_0^2)\Omega^2}, \quad (5.5)$$

or, multiplying the numerator and denominator of the latter by  $5-4K_0^2$ ,

$$A = \frac{3(1-\nu)}{20} \frac{25-16K_0^4}{5K_0^4 - \frac{15(1-\nu)}{2}\Omega^2 - \frac{5}{2}(1+\nu)K_0^2\Omega^2 - 4K_0^6 - 6(1-\nu)\delta K_0^4\Omega^2}. \quad (5.6)$$

This formula, to within higher-order terms, coincides with the long-wave low-frequency expansion of exact solution (A.5) at  $K=K_0$ , see the Appendix. Also, expression (5.3) is the same as Rayleigh wave limit (A.9) in the Appendix at  $K=K_0$  due to the identity  $4B=v_R R'(v_R)$ .


Formulae (5.1)–(5.5) are tested at  $K_0(\Omega) = \frac{1-\varepsilon}{v_R}\Omega$ ,  $\varepsilon \ll 1$ , in order to satisfy condition (2.7) underlying the adapted Rayleigh wave model. In this case  $O(K_0^6)$  terms in the denominator of (5.6) may be ignored; these are essential under assumption  $\Omega \sim K_0^2$ , see also (2.3), characteristic of free bending vibration.

Numerical data are given in Figures 5–7 and Table 2 for  $\nu=0.25$  and  $\varepsilon=0.02$ . In Figures 5 and 6 the solutions of composite equations (5.1) and (5.4) are plotted by the dash-dotted line, along with those of plate equations (5.2) and (5.5) by the dotted line, and Rayleigh wave model (5.3) by the dashed line. It is worth noting that behaviours of the solutions of the Kirchhoff and refined plate equations appear to be quite different over the intermediate frequency range.


In the last Figure, the solution of the composite equations are compared with the exact solution of the associated problem in plane elasticity (A.5), see also the last column of the table. The graphs for (5.1), (5.4), and (A.5) are drawn with dotted, dashed, and solid lines, respectively. Figure 7 and the table indicate a reasonable accuracy of the composite equations also over the intermediate frequency range. As for the dispersion curves in Section 3, the main improvement brought by the refined composite equation is observed at relatively low frequencies.

$\Omega$	Kirchhoff equation (5.2)	Refined Plate equation (5.5)	Rayleigh wave equation (5.3)	Composite equation (5.1)	Refined Composite equation (5.4)	Plane elasticity equations (A.5)
0.1	-50.58	-50.26		-50.00	-50.26	-50.20
0.2	-13.10	-12.75		-12.52	-12.75	-12.70
0.3	-6.195	-5.805		-5.591	-5.806	-5.759
0.4	-3.828	-3.368		-3.180	-3.371	-3.330
0.5	-2.804	-2.235		-2.074	-2.242	-2.206
1	3.391	-0.6853		-0.6660	-0.7320	-0.7159
1.5	0.1405	-0.3593		-0.4686	-0.4762	-0.4549
2	0.0348	-0.2254		-0.4373	-0.4210	-0.3811
2.5			-1.670	-0.4429	-0.4211	-0.3657
3			-1.392	-0.4546	-0.4348	-0.3759
4			-1.044	-0.4675	-0.4562	-0.4260
5			-0.8350	-0.4616	-0.4564	-0.4741
6			-0.6958	-0.4435	-0.4415	-0.4925
8			-0.5219	-0.3942	-0.3944	-0.4502
10			-0.4175	-0.3455	-0.3460	-0.3794
11			-0.3795	-0.3237	-0.3242	-0.3478
12			-0.3479	-0.3038	-0.3043	-0.3201

Table 2. Numerical values of displacement amplitude  $A$ .

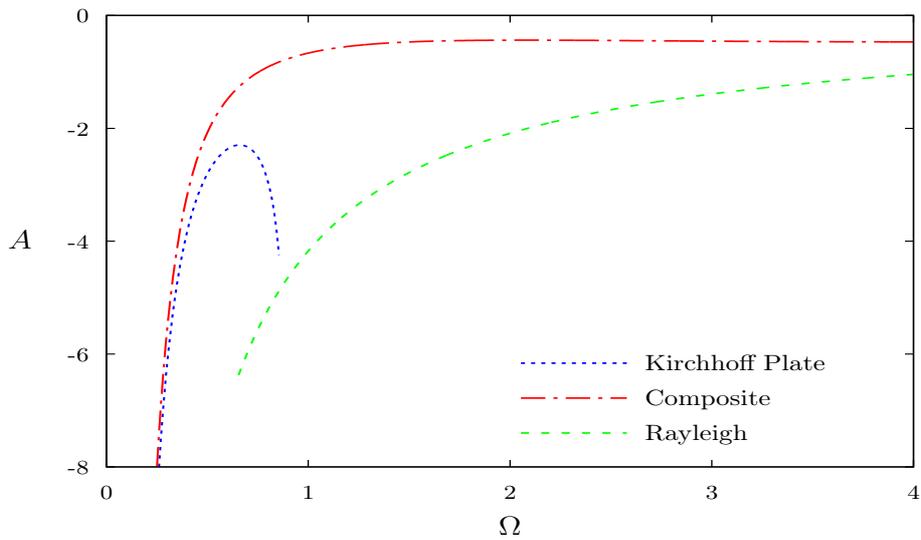


**Figure 5.** Displacement amplitude  $A$  for Kirchhoff equation (5.2), composite equation (5.1), and Rayleigh wave equation (5.3).

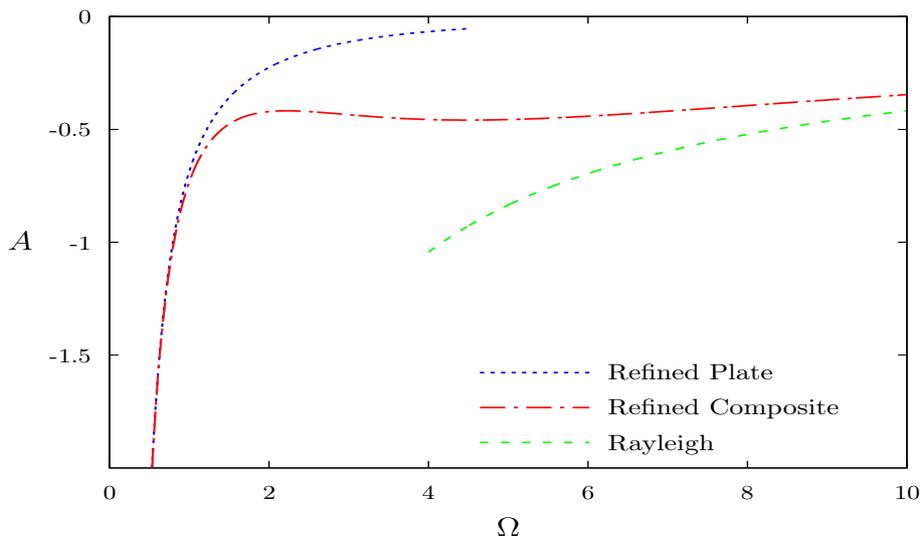

**Figure 6.** Displacement amplitude  $A$  for refined plate equation (5.5), refined composite equation (5.4), and Rayleigh wave equation (5.3).

## 6. Conclusion

Composite wave models for thin elastic plates are established, benefiting from the hyperbolic equation for the Rayleigh wave as their short-wave limiting form. The numerical results for free and forced vibrations, presented in the paper, demonstrate a reasonable accuracy of the proposed 2D equations also over the intermediate frequency range, where they are not asymptotic. As it might be expected, refined composite equation (4.6) corresponding to higher-order long-wave approximation (2.4) is more accurate than simple composite equation (4.1) at low frequencies. The composite theories might also be refined over high-frequency range by using a high-order approximation for the Rayleigh wave, which is however not yet available. We also remark that

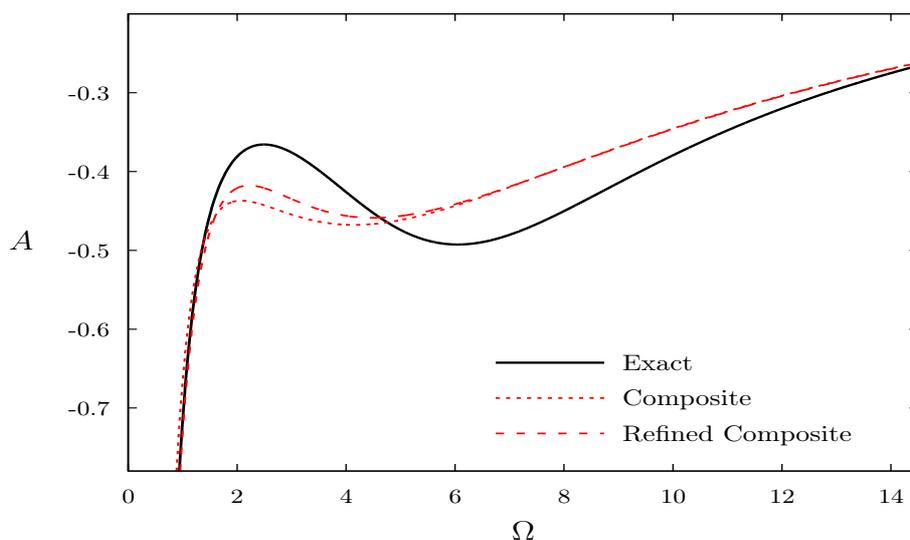

**Figure 7.** Displacement amplitude  $A$  for composite equation (5.1), refined composite equation (5.4), and plane elasticity (A.5).

conditions (2.3) and (2.7) on surface loading can generally be relaxed as it has been done in the example in Section 5 for assumption (2.3).

The developed models, as any 2D theory, do not reproduce all the features of the original 3D problem. In particular, they only pretend to approximate the fundamental antisymmetric Rayleigh–Lamb mode, which is nevertheless of the most interest for modelling of surface loading, exciting both bending and Rayleigh waves over low and high-frequency bands, respectively. Preserving both low and high-frequency components of surface loading in the right hand sides of composite equations (4.1), (4.5), and (4.6) appears to be a nontrivial feature of the presented framework.

It is obvious that the problem of constructing a composite equation does not have a unique solution. At the same time, it is intuitively clear that equations (4.1), (4.5), and (4.6), involving, respectively, just the fourth and sixth order derivatives, are optimal in a sense. Of course, we cannot expect them to lead immediately to composite expansions not only along the faces but also over the interior of the plate. In this case, polynomial approximations across the thickness typical for asymptotic plate theories have to be matched with exponentially decaying surface wave fields.

Another challenge is concerned with the formulation of initial and boundary conditions. In particular, the long-wave procedure in [32] should be adapted for incorporating of short-wave behaviour. The derivation of the boundary conditions apparently has to refer to the results of [33], in which the reflection of the Rayleigh wave from a corner was studied.

For the sake of simplicity, we analysed a specific loading along both plate faces as it is shown in Figure 1 in order to deal with antisymmetric deformation only. Within a more general setup, the symmetric fundamental mode is excited as well. For the latter, similar composite equations may also be established. Moreover, there is a potential for a composite wave theory for thin elastic shells due to a non-significant curvature effect on short-wave motions.

**Data Accessibility.** This paper contains no data.

**Competing Interests.** The authors have no competing interests.

**Authors' Contributions.** All authors have contributed equally to the paper.

**Acknowledgements.** BE and JK acknowledge the financial support of TÜBİTAK via the 2221 - Fellowships for Visiting Scientists and Scientists on Sabbatical Leave.

**Funding.** The research of BE and MP are supported by the Scientific Projects of Anadolu University, No: 1408F370.

**Ethics.** Does not apply.

## Appendix A. Exact solution of plane time-harmonic problem

The governing equations in plane elasticity are given by, e.g. see [31],

$$\Delta\varphi - \frac{1}{c_1^2} \frac{\partial^2 \varphi}{\partial t^2} = 0, \quad \Delta\psi - \frac{1}{c_2^2} \frac{\partial^2 \psi}{\partial t^2} = 0, \quad (\text{A.1})$$

where  $\varphi(x_1, x_3, t)$  and  $\psi(x_1, x_3, t)$  are wave potentials, and  $c_1$  and  $c_2$  are longitudinal and shear wave speeds given, respectively, by

$$c_1 = \sqrt{\frac{E(1-\nu)}{(1+\nu)(1-2\nu)\rho}}, \quad c_2 = \sqrt{\frac{E}{2(1+\nu)\rho}}.$$

Consider a layer ( $-\infty \leq x_1 \leq \infty$ ,  $-h \leq x_3 \leq h$ ) with the boundary conditions on its faces  $x_3 = \pm h$  given in terms of wave potentials by

$$\mu \left( \frac{\partial^2 \psi}{\partial x_1^2} - \frac{\partial^2 \psi}{\partial x_3^2} + 2 \frac{\partial^2 \varphi}{\partial x_1 \partial x_3} \right) \Big|_{x_3=\pm h} = 0, \quad (\text{A.2})$$

$$\frac{\mu}{\chi^2} \left( \frac{\nu}{1-\nu} \frac{\partial^2 \varphi}{\partial x_1^2} + \frac{\partial^2 \varphi}{\partial x_3^2} + 2\chi^2 \frac{\partial^2 \psi}{\partial x_1 \partial x_3} \right) \Big|_{x_3=\pm h} = \pm \frac{P_0}{2} e^{i(kx_1 - \omega t)}, \quad (\text{A.3})$$

where  $\chi = c_2/c_1$ .

The solution to the formulated problem for the vertical displacement at the faces,

$$u_3 = \left( \frac{\partial \varphi}{\partial x_3} + \frac{\partial \psi}{\partial x_1} \right) \Big|_{x_3=\pm h}, \quad (\text{A.4})$$

takes the form  $u_3 = A \frac{hP_0}{\mu} e^{i(kx_1 - \omega t)}$  with

$$A = -\frac{\alpha \Omega^2}{D_{RL}}, \quad (\text{A.5})$$

where

$$\alpha = \sqrt{K^2 - \chi^2 \Omega^2}, \quad \beta = \sqrt{K^2 - \Omega^2}, \quad (\text{A.6})$$

and the Rayleigh–Lamb denominator is written as

$$D_{RL}(K, \Omega) = (K^2 + \beta^2)^2 \tanh \alpha - 4K^2 \alpha \beta \tanh \beta, \quad (\text{A.7})$$

with  $\Omega$  and  $K$  defined by (3.3).

The long-wave low-frequency expansion of formula (A.5) at  $\Omega \ll 1$  and  $K \ll 1$  reads as

$$A = \frac{3(1-\nu)}{4} \frac{1}{K^4 - \frac{4}{5}K^6 - \frac{3(1-\nu)}{2}\Omega^2 - \frac{1+\nu}{2}K^2\Omega^2 + \dots}. \quad (\text{A.8})$$

At leading order, we have for the Rayleigh wave contribution at  $K \sim \Omega \gg 1$ , and  $|\Omega/K - v_R| \ll 1$ , see (2.7),

$$A = \frac{1}{4K} \frac{v_R^2 \sqrt{1 - \chi^2 v_R^2}}{R'(v_R)(c^2 - v_R^2)}, \quad (\text{A.9})$$

where  $c = \Omega/K$ , and the Rayleigh denominator is given by

$$R(c) = (2 - c^2)^2 - 4\sqrt{1 - \chi^2 c^2} \sqrt{1 - c^2}, \quad (\text{A.10})$$

with prime denoting a differentiation with respect to the argument of the Rayleigh denominator.

## References

1. Chebakov R, Kaplunov J, Rogerson GA. 2017 A non-local asymptotic theory for thin elastic plates. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Science* 473, 20170249. (doi:10.1098/rspa.2017.0249)
2. Pradhan SC, Phadikar JK. 2009 Nonlocal elasticity theory for vibration of nanoplates. *Journal of Sound and Vibration* 325, 206-223. (doi:10.1016/j.jsv.2009.03.007)
3. Lu P, Zhang PQ, Lee HP, Wang CM, Reddy JN. 2007 Non-local elastic plate theories. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* 463, 3225-3240. (doi:10.1098/rspa.2007.1903)
4. Sajadi B, Goosen H, van Keulen F. 2017 Capturing the effect of thickness on size-dependent behavior of plates with nonlocal theory. *International Journal of Solids and Structures* 115-116, 140-148. (doi:10.1016/j.ijsolstr.2017.03.010)
5. Ebrahimi F, Barati MR, Dabbagh A. 2016 A nonlocal strain gradient theory for wave propagation analysis in temperature-dependent inhomogeneous nanoplates. *International Journal of Engineering Science* 107, 169-182. (doi:10.1016/j.ijengsci.2016.07.008)
6. Bers L, John F, Schechter M. 1964 *Partial differential equations*. Lecture Notes in Applied Mathematics, AMS, John Wiley and Sons.
7. Goldenveizer AL, Kaplunov JD, Nolde EV. 1993 On Timoshenko-Reissner type theories of plates and shells. *International Journal of Solids and Structures* 30, 675-694. (doi:10.1016/0020-7683(93)90029-7)
8. Goldenveizer AL, Kaplunov JD, Nolde EV. 1990 Asymptotic analysis and improvements of Timoshenko-Reissner-type theories of plates and shells. *Mechanics of Solids (Izv. AN USSR, Mekhanika Tverd. Tela)* 25(6), 126-139.
9. Kaplunov JD, Kossovich LYu, Nolde EV. 1998 *Dynamics of thin walled elastic bodies*, Academic Press, UK.
10. Askes H, Metrikine AV, Pichugin AV, Bennett T. 2008 Four simplified gradient elasticity models for the simulation of dispersive wave propagation. *Philosophical Magazine* 88, 3415-3443. (doi:10.1080/14786430802524108)
11. Metrikine AV. 2006 On causality of the gradient elasticity models. *Journal of Sound and Vibration* 297, 727-742. (doi:10.1016/j.jsv.2006.04.017)
12. Metrikine AV, Askes H. 2002 One-dimensional dynamically consistent gradient elasticity models derived from a discrete microstructure. *European Journal of Mechanics - A/Solids* 21, 555-572. (doi:10.1016/s0997-7538(02)01218-4)
13. Craster RV, Joseph LM, Kaplunov J. 2014 Long-wave asymptotic theories: The connection between functionally graded waveguides and periodic media. *Wave Motion* 51, 581-588. (doi:10.1016/j.wavemoti.2013.09.007)
14. Grigolyuk EI, Selezov IT. 1973 *Nonclassical theories of vibrations of rods, plates and shells*. Advances in Science and Technology, Ser. Mechanics of Deformable Solids, Vol. 5, Moscow, USSR: VINITI.
15. Elishakoff I, Kaplunov J, Nolde E. 2015 Celebrating the centenary of Timoshenko's study of effects of shear deformation and rotary inertia. *Applied Mechanics Reviews* 67, 60802. (doi:10.1115/1.4031965)
16. Selezov I. 1999 Some hyperbolic models for wave propagation. In *Hyperbolic Problems: Theory, Numerics, Applications* (ed. M.Fey and R.Jeltsch), International Series of Numerical Mathematics, vol.130, pp. 833-842. Birkhäuser, Basel. (doi:10.1007/978-3-0348-8724-3)
17. Selezov IT. 1994 Hyperbolic models of wave propagation in rods, plates, and shells. *Mechanics of Solids (Izv. AN USSR, Mekhanika Tverd. Tela)* 29, pp. 64-77.
18. Le KC. 2012 *Vibrations of shells and rods*. Springer Science & Business Media.
19. Kossovich LYu. 1986 *Nonstationary problems of the theory of elastic thin shells*. Saratov University Press, Saratov.
20. Kaplunov J, Prikazchikov DA. 2013 Explicit models for surface, interfacial and edge waves. In *Dynamic localization phenomena in elasticity, acoustics and electromagnetism* (ed. R.V.Craster and J.Kaplunov). CISM Courses and Lectures, vol. 547, pp. 73-114). Springer Vienna.
21. Kaplunov J, Prikazchikov DA. 2017 *Asymptotic theory for Rayleigh and Rayleigh-type waves*. In *Advances in Applied Mechanics* (ed. S.P.A.Bordas and D.S.Balint), Vol. 50, pp. 1-106. Elsevier. (doi:10.1016/bs.aams.2017.01.001)

22. Friedlander FG. 1948 On the total reflection of plane waves. *The Quarterly Journal of Mechanics and Applied Mathematics* 1, 376-384. (doi:10.1093/qjmam/1.1.376).
23. Chadwick P. 1976 Surface and interfacial waves of arbitrary form in isotropic elastic media. *Journal of Elasticity*. 6(1):73-80.
24. Parker DF, Kiselev AP. 2008 Rayleigh waves having generalised lateral dependence. *The Quarterly Journal of Mechanics & Applied Mathematics*. 62(1):19-30.
25. Parker DF. 2013 The Stroh formalism for elastic surface waves of general profile. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* 469, 20130301. (doi:10.1098/rspa.2013.0301)
26. Ege N, Erbaş B, Prikazchikov DA. 2015 On the 3D Rayleigh wave field on an elastic half-space subject to tangential surface loads. *ZAMM - Journal of Applied Mathematics and Mechanics / Zeitschrift für Angewandte Mathematik und Mechanik* 95, 1558-1565. (doi:10.1002/zamm.201400211)
27. Kaplunov J, Prikazchikov DA, Erbaş B, Şahin O. 2013 On a 3D moving load problem for an elastic half space. *Wave Motion* 50, 1229-1238. (doi:10.1016/j.wavemoti.2012.12.008)
28. Erbaş B, Kaplunov J, Prikazchikov DA, Şahin O. 2017 The near-resonant regimes of a moving load in a three-dimensional problem for a coated elastic half-space. *Mathematics and Mechanics of Solids* 22, 89-100. (doi:10.1177/1081286514555451)
29. Van Dyke M. 1975 *Perturbation methods in fluid mechanics/Annotated edition*. NASA STI/Recon Technical Report A.;75.
30. Andrianov IV, Awrejcewicz J, Manevitch LI. 2013. *Asymptotical mechanics of thin-walled structures*. Springer Science & Business Media.
31. Achenbach J. 2012 *Wave propagation in elastic solids* (Vol. 16). Elsevier.
32. Kaplunov J, Nolde E, Rogerson GA. 2006 An asymptotic analysis of initial-value problems for thin elastic plates. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* 462, 2541-2561. (doi:10.1098/rspa.2006.1687)
33. Kamotski VV, Fradkin LJ, Samokish BA, Borovikov VA, Babich VM. On Budaev and Bogy's approach to diffraction by the 2D traction-free elastic wedge. *SIAM Journal on Applied Mathematics*. 2006 Dec 5;67(1):235-59.