

Adaptive Morphological Reconstruction for Seeded Image Segmentation

Tao Lei, *Member, IEEE*, Xiaohong Jia, Tongliang Liu, *Member, IEEE*,
Shigang Liu, Hongying Meng, *Senior Member, IEEE*, and Asoke K. Nandi, *Fellow, IEEE*

Abstract—Morphological reconstruction (MR) is often employed by seeded image segmentation algorithms such as watershed transform and power watershed, as it is able to filter out seeds (regional minima) to reduce over-segmentation. However, MR might mistakenly filter meaningful seeds that are required for generating accurate segmentation and it is also sensitive to the scale because a single-scale structuring element is employed. In this paper, a novel adaptive morphological reconstruction (AMR) operation is proposed that has three advantages. Firstly, AMR can adaptively filter out useless seeds while preserving meaningful ones. Secondly, AMR is insensitive to the scale of structuring elements because multiscale structuring elements are employed. Finally, AMR has two attractive properties: monotonic increasingness and convergence that help seeded segmentation algorithms to achieve a hierarchical segmentation. Experiments clearly demonstrate that AMR is useful for improving performance of algorithms of seeded image segmentation and seed-based spectral segmentation. Compared to several state-of-the-art algorithms, the proposed algorithms provide better segmentation results requiring less computing time.

Index Terms—Mathematical morphology, image segmentation, seeded segmentation, spectral segmentation.

I. INTRODUCTION

MORPHOLOGICAL reconstruction (MR) [1] is a powerful operation in mathematical morphology. It has been widely used in image filtering [2], image segmentation [3],

and feature extraction [4], etc. Among these applications, one of the most important applications is that MR is often used in seeded segmentation algorithms [5], [6] such as watershed transformation (WT) [7] and power watershed (PW) [8] to reduce over-segmentation caused by image noise and details. However, there are two drawbacks [9], [10] when MR is used in seeded segmentation algorithms.

- It is difficult to reduce over-segmentation while obtaining a high segmentation accuracy for seeded segmentation algorithms (we use MR-WT to denote MR-based watershed transform and use MR-PW to denote MR-based power watershed). Although MR is able to filter noise in gradient images, some important contour details are smoothed out as well.
- MR is sensitive to the scale of structuring elements. In practical applications, if the scale is too small, the reconstructed gradient image suffers from a serious over-segmentation. Conversely, if the scale is too large, the reconstructed gradient image suffers from an under-segmentation.

Generally, MR is used in watershed transform to improve the segmentation effect by employing a structuring element to filter regional minima [11]. However, it is very difficult to filter useless regional minima while preserving meaningful ones by simply considering one single-scale structuring element. Although H -min imposition [12] is a simple and efficient method for over-segmentation reduction, it relies on a threshold choice and is likely to miss some important boundaries. Region merging [13], [14] is also a popular method for this, but it requires iterating and renewing edge weight leading to a high computing burden. In addition, some researchers employ reasonable contour detection methods, e.g., globalized probability of boundary (gPb) [15] that combines the multiscale information from brightness, color and texture, to achieve better image segmentation. However, the gPb is computationally expensive because it combines too many feature cues for contour detection. To speed up the algorithm of contour detection, Dollar and Zitnick [16] took the advantage of the structure present in regional image patches and random decision forests, and proposed a fast structured edge (SE) detection approach using structured forests. This algorithm obtains real-time performance and state-of-the-art edge detection but requires a huge amount of memory for training data. To reduce memory requirement, Hallman and Fowlkes [17] proposed a simple and efficient model to learn contour detection, namely oriented edge forests (OEF). Although these

This work was supported in part by the National Natural Science Foundation of China under Grant 61461025, Grant 61871259, Grant 61811530325 (IEC\NSFC\170396, Royal Society, U.K.), Grant 61871260, Grant 61672333, and Grant 61873155, in part by the China Postdoctoral Science Foundation under Grant 2016M602856, in part by the National Key R&D Program of China under Grant 2017YFB1402102, and in part by Australian Research Council Projects DP-180103424 and DE-1901014738.

T. Lei is with the School of Electronic Information and Artificial Intelligence, Shaanxi University of Science and Technology, Xi'an 710021, China, and also with the School of Computer Science, Northwestern Polytechnical University, Xi'an 710072, China. (E-mail: leitao@sust.edu.cn)

X. Jia is with the School of Electrical and Control Engineering, Shaanxi University of Science and Technology, Xi'an 710021, China. (E-mail: jiaxh-sust@163.com)

T. Liu is with the School of Computer Science in the Faculty of Engineering at The University of Sydney, J12 Cleveland St, Darlingtown NSW 2008, Australia. (E-mail: tongliang.liu@sydney.edu.au)

S. Liu is with the School of Computer Science, Shaanxi Normal University, Xi'an 710119, China. (E-mail: shgliu@gmail.com)

H. Meng is with the Department of Electronic and Computer Engineering, Brunel University London, Uxbridge, Middlesex, UB8 3PH, U.K. (E-mail: hongying.meng@brunel.ac.uk)

A. K. Nandi is with the Department of Electronic and Computer Engineering, Brunel University London, Uxbridge, Middlesex, UB8 3PH, U.K., and also the Key Laboratory of Embedded Systems and Service Computing, College of Electronic and Information Engineering, Tongji University, Shanghai 200092, China. (E-mail: asoke.nandi@brunel.ac.uk)

improved contour detectors are superior to traditional detectors, e.g. Sobel or Canny, and they are helpful for improving subsequent image segmentation, they still generate a large number of seeds leading to serious over-segmentations.

In practice, contour detection methods are usually combined with other approaches to improve image segmentation effect. For example, Fu *et al.* [18] proposed a robust image segmentation approach using contour-guided color palettes by integrating contour and color cues, where SE, mean-shift algorithm [19], region merging, and spectral clustering [20] are combined to achieve better segmentation results. However, the approach is complex because it combines several different algorithms that requires many parameters.

In this paper, we propose an adaptive morphological reconstruction (AMR) operation that is able to generate a better seed image than MR to improve seeded segmentation algorithms. Firstly, AMR employs multiscale structuring elements to reconstruct a gradient image. Secondly, a pointwise maximum operation on these reconstructed gradient images is performed to obtain the final adaptive reconstruction result. Because AMR employs small structuring elements to reconstruct pixels of large gradient magnitudes while employing large structuring elements to reconstruct pixels of small gradient magnitudes in a gradient image, AMR is able to obtain better seed images to improve the seeded segmentation algorithms. Our main contributions are summarized as follows.

- Multiscale structuring elements are employed by AMR, and different scaled structuring elements are adaptively adopted by pixels of different gradient magnitudes without computing the local features of a gradient image.
- AMR has a convergence property and a monotonic increasing property, the two properties help seeded segmentation algorithms to achieve a hierarchical segmentation.
- AMR has a low computational complexity, and it can help seed-based spectral segmentation to achieve better image segmentation results than the-state-of-art algorithms.

The rest of the paper is organized as follows. In the next section, the research background related with AMR is introduced and analyzed. On this basis, AMR is proposed, and its two properties, monotonic increasingness and convergence are carefully analyzed in Section III. To demonstrate the superiority of AMR, AMR is used for seeded image segmentation and seed-based spectral segmentation. Experiments are presented in Section IV, followed by the conclusion in Section V.

II. BACKGROUND

A. Morphological Reconstruction

MR is an image transformation that requires two input images, a marker image and a mask image. Let two grayscale images f and g denote the marker image that is the starting point for the transformation and the mask image that constrains the transformation, respectively [21]. If $f \leq g$, which means f is pointwise less than or equal to g , the morphological dilation reconstruction (R^δ) of g from f is denoted by

$$R_g^\delta(f) = \delta_g^{(n)}(f), \quad (1)$$

15	0	100		89	66	62		15	0	62
6	90	12	$\wedge$	19	28	2	=	6	28	2
1	6	73		156	23	50		1	6	50

(a)

15	0	100		89	66	62		89	66	100
6	90	12	$\vee$	19	28	2	=	19	90	12
1	6	73		156	23	50		156	23	73

(b)

Fig. 1. An example for pointwise extremum operation. (a) Pointwise minimum. (b) Pointwise maximum.

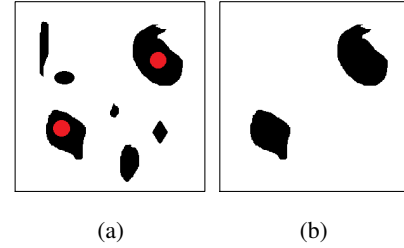


Fig. 2. Binary MR from markers. (a) A mask image. (b) Reconstructed result.

where $\delta_g^{(1)}(f) = \delta(f) \wedge g$, $\delta_g^{(k)}(f) = \delta(\delta_g^{(k-1)}(f)) \wedge g$ for $2 \leq k \leq n$, $k, n \in N^+$ satisfies $\delta_g^{(n)}(f) = \delta_g^{(n-1)}(f)$. The symbol δ represents the elementary morphological dilation operation, and $\wedge$ stands for the pointwise minimum at each pixel of two images as shown in Fig. 1(a).

Similarly, if $f \geq g$, the morphological erosion reconstruction (R^ε) of g from f , which is the dual operation of R^δ , is defined as

$$R_g^\varepsilon(f) = \varepsilon_g^{(n)}(f), \quad (2)$$

where $\varepsilon_g^{(1)}(f) = \varepsilon(f) \vee g$, $\varepsilon_g^{(k)}(f) = \varepsilon(\varepsilon_g^{(k-1)}(f)) \vee g$ for $2 \leq k \leq n$, $k, n \in N^+$ satisfies $\varepsilon_g^{(n)}(f) = \varepsilon_g^{(n-1)}(f)$. The symbol ε represents the elementary morphological erosion operation, and $\vee$ stands for the pointwise maximum at per pixel of two images as shown in Fig. 1(b).

To further illustrate the principle of MR for image transformation, we present an example for the binary MR as shown in Fig. 2, where the red regions denote seeds, i.e., the marker image f .

According to Fig. 2 and (1)-(2), a suitable marker image is important for MR. We have known that $f \leq g$ for R^δ while $f \geq g$ for R^ε . Thus, there are lots of choices for f . Different marker images corresponds to different reconstruction results as shown in Fig. 3. To obtain an efficient f in practice, the marker image is usually obtained by performing a transformation on the corresponding mask image [22]-[24]. For example, the erosion or dilation result of a mask image is often considered as a marker image [25], i.e., $f = \varepsilon_{b_i}(g)$ or $f = \delta_{b_i}(g)$, where b_i is a disk shaped structuring element, the

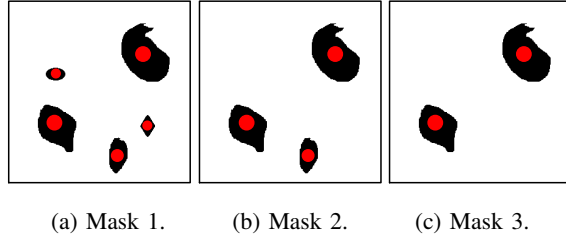


Fig. 3. Binary MR from different markers.

radius of b_i is i , $i \in N^+$. Therefore, MR is sensitive to the parameter i because the marker image is decided by the scale of the structuring element.

As compositional morphological opening and closing operations show better performance than elementary morphological erosion and dilation operations for image filtering, feature extraction, etc., we present the definition of compositional morphological opening and closing reconstructions (R^γ and R^ϕ) of g from f as follows

$$\begin{cases} R_g^\gamma(f) = R_g^\delta(R_g^\varepsilon(f)) \\ R_g^\phi(f) = R_g^\varepsilon(R_g^\delta(f)) \end{cases} \quad (3)$$

B. Multiscale and Adaptive Mathematical Morphology

For image filtering and enhancement using morphological operators, a large-scale structuring element can suppress noise but may also blur the image details, whereas a small-scale structuring element can preserve image details but may fail to suppress noise. Some researchers proposed multiscale and adaptive morphological operators to improve the performance of traditional morphological operators. However, most multiscale morphological operators [26], [27] such as morphological gradient operators and morphological filtering operators, average all scales of morphological operation results as final output

$$y = \frac{1}{\lambda} \sum_{j=1}^{\lambda} g_j, \quad (4)$$

where y is the final output result, j is the radius of the structuring element, $1 \leq j \leq \lambda$, $j, \lambda \in N^+$. Although the average result is superior to the result based on single-scale morphological operators, it causes contour offset and mistakes. Some researchers improved multiscale morphological operators by introducing a weighted coefficient to (4), and they defined adaptive multiscale morphological operators as follows [28]

$$y = \frac{1}{\lambda} \sum_{j=1}^{\lambda} \omega_j g_j, \quad (5)$$

where w_j is the weighted coefficient on the j th scale result. However, because the computing of weighted coefficients is complex, the adaptive multiscale morphological operators have a low computational efficiency. Moreover, the weighted average result is similar to average result because it is difficult to obtain the optimal weighted coefficient, even though the former is slightly better than the latter.




Fig. 4. The original image and ground truths (GT) from BSDS500. (a) "100007". (b) GT 1. (c) GT 2. (d) GT 3. (e) GT 4. (f) GT 5. BSDS (<http://www.eecs.berkeley.edu/Research/Projects/CS/vision/bsds/>) is a very popular image dataset and it is often used for the evaluation of image segmentation algorithms. For each image in BSDS, there are 4 to 9 ground truths segmentations that are delineated by different human subjects.

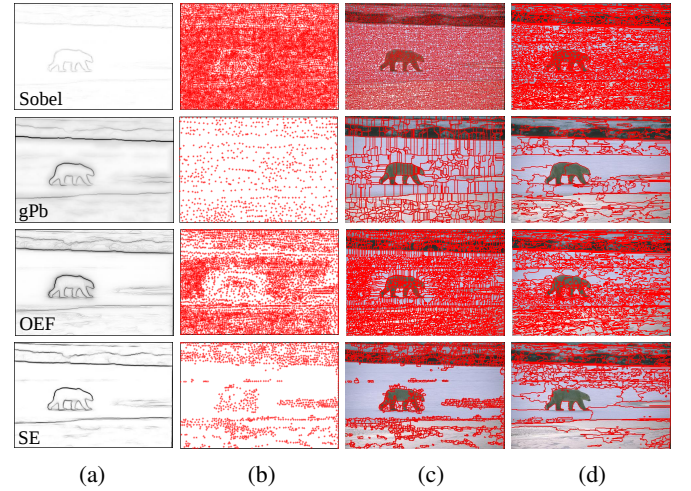



Fig. 5. Over-segmentation reduction by improving the gradient image of "100007". (a) Different gradient images. (b) Seed images (regional minima). (c) WT. (d) PW ($p = 2$) [8].

Although lots of adaptive multiscale morphological operators [29]-[32] have been proposed, it can be seen from (4)-(5) that both the multiscale and adaptive morphological operators employ a linear combination of different-scale results to improve single-scale morphological gradient or filtering operators. Because the linear combination is unsuitable for multiscale morphological reconstruction operation, in this paper, we try to employ a non-linear combination (i.e., the pointwise maximum operation denoted by $\vee$) to design adaptive morphological reconstruction operators. These operators are different from conventional multiscale and adaptive morphological operators employing linear combination in (4)-(5). We use non-linear operation $\vee$ instead of linear combination since the former is more suitable than the latter for the removal of useless seeds in seeded image segmentation.

C. Seeded Segmentation

Seeded segmentation algorithms, such as graph cuts [33], random walker [34], watersheds [7], and power watershed [8] have been widely used in complex image segmentation tasks due to their good performance [35]. It is not required to give seed images for both graph cuts and random walker because they usually consider each pixel as a seed. However, a seed image is necessary for WT and PW by computing the regional minima of a gradient image.

Since both WT and PW obtain seeds from a gradient image that often includes a huge number of seeds generated by noise

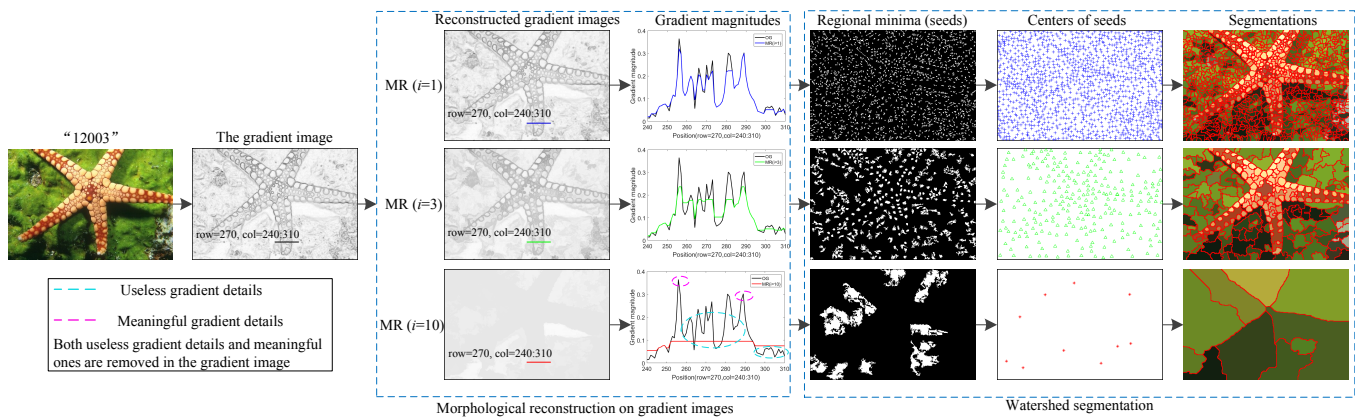

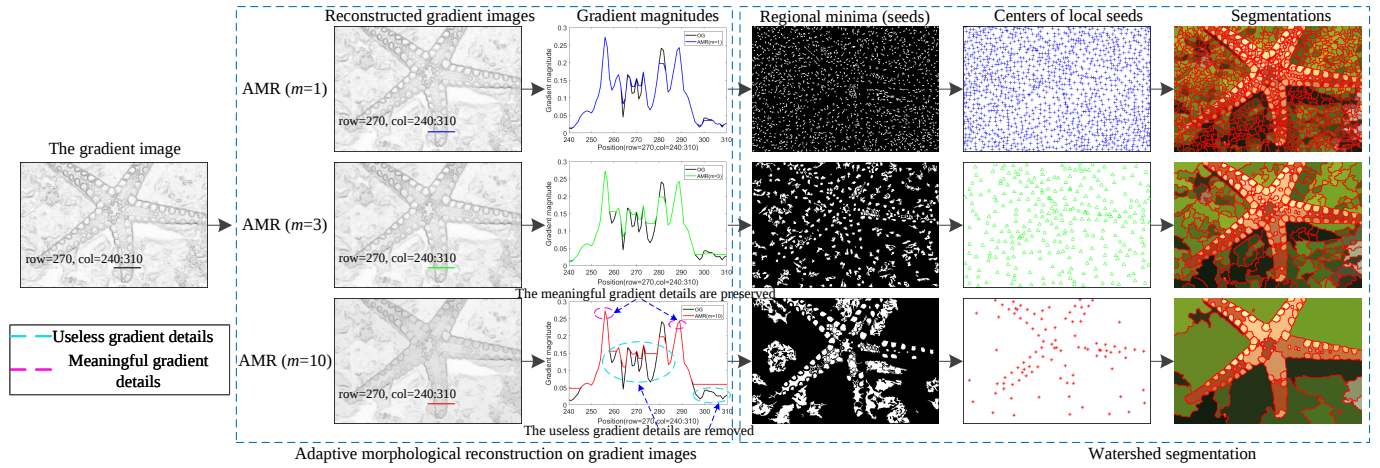


Fig. 8. Seeded segmentation framework based on AMR-WT.

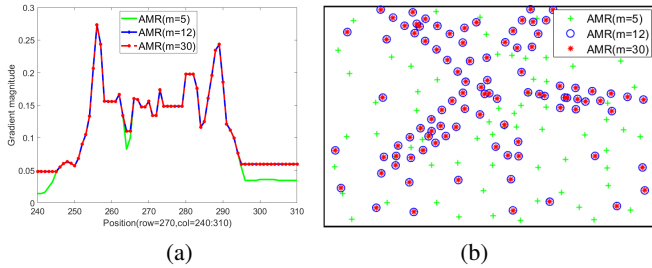


Fig. 9. Comparison of gradient reconstruction and seed filtering with variant value of m . Because AMR has an important property of convergence, the seed image is unchanged when the value of m is large enough. The seed image is unchanged when $m \geq 12$ for the image “12003”. (a) The variation of gradient magnitudes. (b) The variation of seed images.

provides better image segmentation results yet requires a long running time.

The popular superpixel approaches have some drawbacks for spectral segmentation. Firstly, mean-shift algorithm involves three parameters and it is sensitive to these parameters. Secondly, SLIC only generates superpixels that include regular regions, and these regions have a similar shape and size. Finally, LSC is superior to SLIC because LSC successfully connects a local feature with a global optimization objective function, so that LSC can generate more reasonable segmentation results. However, similar to SLIC, LSC also provides superpixels that include regular regions with a similar shape and size.

As seed-based spectral segmentation algorithms are sensitive to pre-segmentation results, an excellent pre-segmentation algorithm can improve segmentation results generated by seed-based spectral segmentation algorithms.

III. ADAPTIVE MORPHOLOGICAL RECONSTRUCTION

A. The Proposed AMR

To overcome the drawback of MR on regional minima filtering, we propose an AMR that is able to filter useless regional minima and maintains meaningful ones generated by

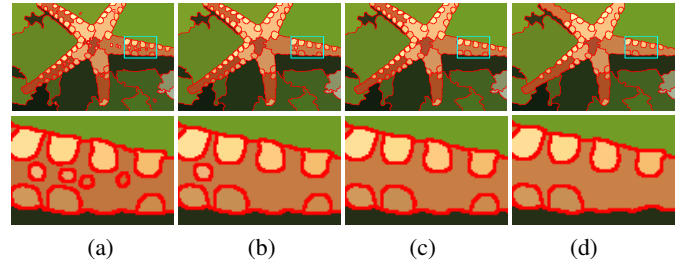


Fig. 10. Segmentation results using AMR-WT by changing the value of s . (a) $s = 1$, $m = 10$. (b) $s = 2$, $m = 10$. (c) $s = 3$, $m = 10$. (d) $s = 5$, $m = 10$.

salient objects. Fig. 7 shows the motivation of AMR in which multiscale structuring elements are employed to reconstruct a gradient image, i.e., small structuring elements are adopted by pixels of large gradient magnitude while large structuring elements are adopted by pixels of small gradient magnitude.

Definition 1. Let $b_s \subseteq \dots \subseteq b_i \subseteq b_{i+1} \dots \subseteq b_m$ be a series of nested structuring elements, where i is the scale parameter of a structuring element, $1 \leq s \leq i \leq m$, $s, i, m \in \mathbb{N}^+$. For a gradient image g such that $f = \varepsilon_{b_i}(g)$ and $f \leq g$, the adaptive morphological reconstruction denoted by ψ of g from f is defined as

$$\psi(g, s, m) = \bigvee_{s \leq i \leq m} \{R_g^\phi(f)_{b_i}\}. \quad (6)$$

Note that the pointwise maximum operation is only suitable for R^ϕ , but not suitable for R^γ . Because $\lim_{m \rightarrow \infty} R_g^\gamma(f)_{b_m} = \max(g)$ (the proof is presented in Appendix A) and $\lim_{m \rightarrow \infty} \bigvee_{s \leq i \leq m} \{R_g^\gamma(f)_{b_i}\} = \max(g)$, $\psi(g, s, m)$ is unable to obtain a significantly convergent gradient image if $\psi(g, s, m) = \bigvee_{s \leq i \leq m} \{R_g^\gamma(f)_{b_i}\}$.

We apply AMR to the gradient image shown in Fig. 6. The reconstruction and segmentation results are shown in Fig. 8, where the adopted structuring elements are disk and $s = 1$. More detailed comparisons are shown in Fig. 9. By comparing Fig. 8 with Fig. 6, it is obvious that AMR obtains better seed images than MR due to the fact that the non-linear operation $\bigvee$ is able to remove efficiently useless seeds.

To further show the influence of s on AMR, Fig. 10 shows segmentation results provided by AMR through changing the value of s . We can see that there are some small segmented areas when the value of s is small. These small areas are merged by increasing the value of s . However, although a large s leads to the merge of small areas, the precision of object contours will be decreased as shown in Fig. 6. Therefore, we usually set $1 \leq s \leq 3$ for a moderate-sized image.

B. The Monotonic Increasingness Property of AMR

AMR is an algorithm that aims at finding meaningful regional minima by merging or filtering useless regional minima. AMR includes two parameters s and m . When we increase the value of m , gradient images reconstructed by AMR keep the increasing order as shown in Theorem 1.

Theorem 1. Let ψ be an adaptive morphological reconstruction operator, ψ is increasing with respect to the scale of structuring elements, i.e., for a gradient image g such that $f = \varepsilon_{b_i}(g)$ and $f \leq g$, $1 \leq p, q \leq m$, $p, q, m \in \mathbb{N}^+$, we have

$$p \leq q \Rightarrow \psi(g, s, p) \leq \psi(g, s, q). \quad (7)$$

The proof of Theorem 1 is presented in Appendix B. Theorem 1 shows that the gradient image processed by AMR is monotonous increasing with the increase of m . Fig. 9 demonstrates Theorem 1. We can see that if m is enlarged, the more unimportant seeds are removed, and important seeds are preserved. Actually, the result is equivalent to region merging. However, the method is simpler than region merging. According to the result, it can be seen that AMR can help seeded segmentation algorithms to achieve a hierarchical segmentation [47], [48]. Hierarchical segmentation is a multilevel segmentation scheme, and it usually outputs a coarse-to-fine hierarchy of segments ordered by the level of details. Multi-scale combinatorial grouping (MCG) proposed by Pont-Tuset *et al.* [49] is an excellent hierarchical segmentation approach that employs a fast normalized cut algorithm and an efficient algorithm for combinatorial merging of hierarchical regions. Based on the hierarchical segmentation results provided by MCG, some improved approaches are also proposed [50], [51]. These improved approaches achieve better segmentation effect but have lower computational efficiency than MCG.

Before analyzing the relationship between AMR-WT and hierarchical segmentation, we first review some basic concepts of hierarchical segmentation. Let Ω be a finite set. A hierarchy H on Ω is a set of parts of Ω such that

- $\Omega \in H$.
- For every $\omega \in \{\Omega\}$, $\{\omega\} \in H$.
- For each pair $(h, h') \in H^2$, $h \cap h' \neq \emptyset \Rightarrow h \subseteq h'$ or $h' \subseteq h$.

Note that H is a chain of nested partitions. Let H_0 be the initial partition of Ω , which corresponds to the finest partition of Ω , and H_n be the coarsest partition of Ω , which segments the images as one single region. A partition H_z , $0 \leq z \leq n$, on Ω has the property that

$$H_z = H_0, \text{ if } z \leq 0, \quad (8)$$

$$\exists n \in \mathbb{N}^+, H_z = \{\Omega\}, \forall z \geq n, \quad (9)$$

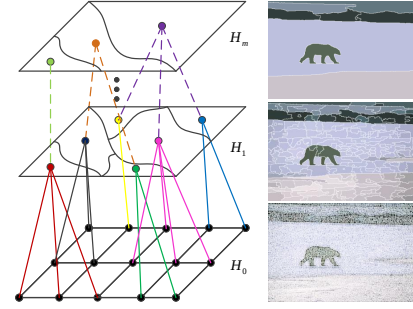


Fig. 11. The principle of hierarchical segmentation, $H_0 \subseteq H_1 \subseteq \dots \subseteq H_m$.

$$p \leq q \Rightarrow H_p \subseteq H_q, 1 \leq p, q < n, \quad (10)$$

where $H_p \subseteq H_q$ denotes the partition. H_p is finer than the partition H_q . Derived from Theorem 1 and Fig. 9, we obtain

$$\psi(g, s, p) \leq \psi(g, s, q) \Rightarrow S(\psi(g, s, p)) \subseteq S(\psi(g, s, q)), \quad (11)$$

where S denotes seeded segmentation algorithms such as WT or PW. Suppose that $H_0 = S(g)$, $H_m = S(\psi(g, s, m))$, and $s = 1$ then

$$H_0 \subseteq H_1 \subseteq \dots \subseteq H_m. \quad (12)$$

According to (12), the principle of the hierarchical segmentation based on AMR is shown in Fig. 11, in which the data points represent regions obtained by the hierarchical segmentation at different levels.

C. The Convergence Property of AMR

By comparing Fig. 6 with Fig. 8, it can be observed that AMR provides significant gradient images and AMR-WT generates convergent segmentation results via enlarging the scale of structuring elements. An important convergence property of AMR is described in the following.

Theorem 2. Let ψ be an adaptive morphological reconstruction operator, ψ is convergent when increasing the scale parameter m , i.e., for any gradient images f and g such that $b_s \subseteq \dots \subseteq b_{i+1} \subseteq \dots \subseteq b_m$, if $\min(\psi(g, s, m)) \geq \max(R_g^\phi(f)_{b_{m+1}})$ then

$$\psi(g, s, m) = \psi(g, s, m + j), \quad (13)$$

i.e., $\forall s \leq i \leq m \{R_g^\phi(f)_{b_i}\} = \forall s \leq i \leq m+j \{R_g^\phi(f)_{b_i}\}$, $1 \leq s \leq m, j \in \mathbb{N}^+$, and the proof is presented in Appendix C.

According to Fig 9, it can be seen that the gradient result and the corresponding seed image will remain unchanged when $m \geq 12$. This empirically illustrates that the gradient image reconstructed by AMR is convergent when increasing the value of m . Besides, the large gradient magnitude is unchanged while the small gradient magnitude converges to ones larger than itself for AMR. However, the large gradient magnitude converges to one smaller than itself while the small gradient magnitude converges to one larger than itself for MR when the structuring element is small. With the increase of the value of m , the value of gradient magnitudes finally converges to the minimum of the original gradient image, i.e.,



Fig. 12. Segmentation results on images with complex texture. Here, N denotes the number of superpixel areas used for SLIC, LSC, and SH; N is 400 for the left two images and N is 800 for the right two images. Also, r denotes the radius of structuring element used for MR-WT; values of r are 7 and 4, respectively. For AMR-WT, $s = 2$ and $m = 10$ are used for the left two images, while $s = 2$ and $m = 6$ are used for the right two images.

$\lim_{m \rightarrow \infty} R_g^\phi(f)_{b_m} = \min(g)$ (see Appendix A). Consequently, MR removes all regional minima while AMR only filters useless regional minima and preserves significant ones when $m \rightarrow \infty$.

Furthermore, we analyze how to determine the parameter m for AMR. The computational efficiency of AMR is influenced by the parameter m . A small m means a low computational complexity. According to Theorem 2, the reconstructed gradient image and the corresponding segmentation result are unchanged when $\min(\psi(g, s, m)) \geq \max(R_g^\phi(f)_{b_{m+1}})$, but the obtained m is usually large. As the paper aims at employing AMR to improve seeded segmentation algorithms, we replace the convergence condition $\min(\psi(g, s, m)) \geq \max(R_g^\phi(f)_{b_{m+1}})$ with checking the difference between $\psi(g, s, m)$ and $\psi(g, s, m - 1)$. We propose an objective function for justifying the convergence of AMR

$$J(g, s) = \max|\psi(g, s, m) - \psi(g, s, m - 1)|, \quad (14)$$

where $m \geq 2$, $m \in \mathbb{N}^+$. It is clear that the segmentation result will remain unchanged when $J \leq \eta$, η is a minimal threshold error, and it is a constant used for J , but m is a variant for $\psi(g, s, m)$. Consequently, only a parameter s needs to be tuned for obtaining different reconstruction results.

D. The Algorithm of AMR

AMR only involves the parameter s and η , as described in the detailed steps of AMR in Algorithm 1¹. To speed

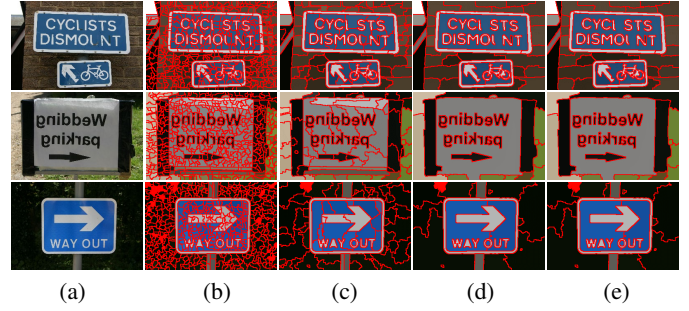


Fig. 13. Segmentation results using AMR-WT by changing the value of m . The results shows that AMR is monotonic increasing by increasing the value of m . Moreover, AMR is convergent because the segmentation result is unchanged when $m \geq 11$. (a) Images. (b) $s = 1$, $m = 1$. (c) $s = 1$, $m = 3$. (d) $s = 1$, $m = 11$. (e) $s = 1$, $m = 50$.

Algorithm 1 Adaptive morphological reconstruction (AMR)

Input: g (a gradient image).

Output: ψ (a reconstructed gradient image).

1: **Initialize:** set values for s , m (the scale of the minimal and maximal structuring element) and η , both m and η are the convergent condition used for AMR.

2: **for** $i = s, s + 1, \dots, m$ **do**

3: Compute $R_g^\phi(f)_{b_i}$ where $f = \varepsilon_{b_i}(g)$, b_i is a structuring element.

4: Update $\psi(g, s, i)$ and $J(g, s)$,

5: **if** $i = s$ **then**

6: $\psi(g, s, i) = \{R_g^\phi(f)_{b_i}\}$

7: $J(g, s) = \max|\psi(g, s, i)|$

8: **else**

9: $\psi(g, s, i) = \vee \{\psi(g, s, i - 1), R_g^\phi(f)_{b_i}\}$

10: $J(g, s) = \max|\psi(g, s, i) - \psi(g, s, i - 1)|$

11: **end if**

12: **if** $J \leq \eta$ **then**

13: **break**

14: **end if**

15: **end for**

up the convergence of Algorithm 1, the three parameters s , m , and η are used for AMR because the iteration can be stopped according to m or η . The computational complexity of AMR depends on the values of m or η . A large value of m corresponds to a small value of η . The larger is the value of m , the longer is the execution time of AMR. Since we have known that AMR has a fast convergent property as shown in Fig. 8, a small m is enough for moderate-sized images in practical applications. A small m indicates that AMR has a low computational complexity.

Note that the parameter m is unnecessary theoretically, we use two convergent condition m and η to speed up the convergence of Algorithm 1. We applied Algorithm 1 to images with complex texture content to demonstrate that the proposed AMR is effective for reducing over-segmentation as shown in Fig. 12. AMR-WT not only overcomes the problem of over-segmentation but also obtains better contours than MR-WT and state-of-the-art superpixel methods. Furthermore, we test Algorithm 1 on images with text to show the monotonic

¹Source code is available at <https://github.com/SUST-reynole/AMR>

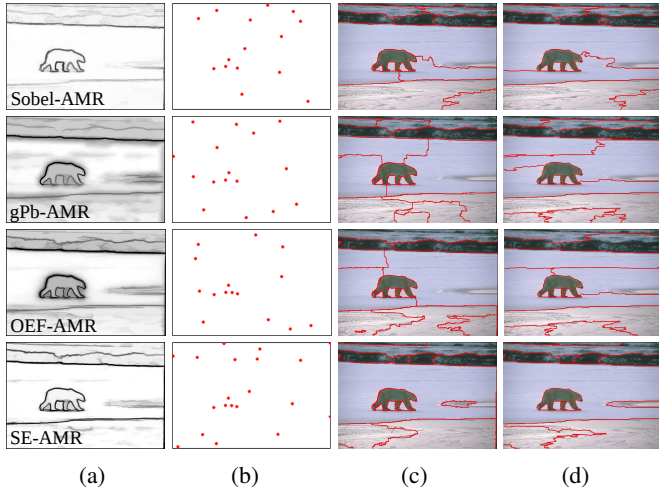


Fig. 14. Comparison of segmentation results using AMR-WT/PW ($s = 2$). (a) Gradient images. (b) Seeds (regional minimum). (c) WT. (d) PW ($q = 2$) [8].

increasing and convergent properties of AMR. Fig. 13 shows the comparison results. We can see that the segmentation results are nested, which demonstrates the monotonic increasing property of AMR. Moreover, the segmentation results are unchanged when $m \geq 11$, which demonstrates the convergent property of AMR.

IV. EXPERIMENTS

To demonstrate the effectiveness and efficiency of the proposed AMR, we apply AMR to seeded image segmentation and spectral segmentation. We conduct experiments on the BSDS500 dataset. The experiments are performed on a workstation with an Intel Core (TM) i7-6700, 3.4GHz CPU and 16GB memory.

We compare the proposed algorithms with state-of-the-art algorithms including a multiscale morphological gradient for watersheds (MMG-WT) [26], multiscale ncut (MNCut) [52], oriented-watershed transform-ultrametric contour map (gPb-owt-ucm) [15], the algorithm recovering occlusion boundaries from an image proposed by Hoiem (gPb-Hoiem) [53], spectral segmentation algorithms proposed by Kim *et al.* (FNCut, cPb-owt-ucm) [39], Higher-order correlation clustering (HO-CC) [54], global/regional affinity graph (GL-graph) [55], single-scale combinatorial grouping (SCG) [49], and multiscale combinatorial grouping (MCG) [49]. The open source codes and model parameters suggested by the corresponding authors are used. Because the author did not present specific parameter values for MMGR-WT, we set $r = 5$ and $0.1 \leq h \leq 0.3$, where h is a threshold and it is used to generate a marker image, and r is the radius of the structuring element used for MR. For the proposed approaches, we set $1 \leq s \leq 3$, $m = 50$, and $\eta = 10^{-4}$.

We report the experimental results using three evaluation metrics to quantitatively measure the performance of segmentation algorithms: probabilistic rand index (PRI), segmentation covering (CV), and variation of information (VI). The PRI and CV are similarity measures, and they are large while the VI

TABLE I. Comparison of the number of seeds generated by gradient images

Images	Sobel	gPb [15]	OEF [17]	SE [16]
Original gradient images	9175	746	5348	1347
Gradient images reconstructed by AMR	15	16	15	19

is small when the final segmentation is close to ground truth segmentation.

A. Seeded Image Segmentation

AMR is useful for improving seeded image segmentation because it employs multiscale structuring elements to obtain a convergent seed image without pre-setting many parameters. To show the capability of AMR, it is applied to different gradient images to filter seeds. Fig. 14 shows reconstructed gradient images by AMR and the corresponding segmentation results by WT/PW. These results are clearly better than the ones shown in Fig. 5. The problem of over-segmentation for seeded segmentation algorithms is therefore addressed. Furthermore, compared Fig. 6 to Fig. 14, although both MR and AMR are able to filter seeds, AMR is able to maintain meaningful seeds that correspond to important contours.

Furthermore, Table I shows the number of seeds generated by gradient images. We can see that the reconstructed gradient images generate fewer seeds than original gradient images, which demonstrates AMR is efficient for the filtering of useless seeds. Moreover, AMR is robust for different gradient images obtained by Sobel, gPb, OEF, and SE because the final segmentation results are similar.

In Fig. 14, we set $s = 2$ because the segmentation result includes too many small regions when $s = 1$. Clearly, s controls the number of small regions in segmentation results. Generally, the value of s depends on the resolution of the images to be segmented, e.g., $1 \leq s \leq 3$ for BSDS500.

To demonstrate that the proposed AMR is robust for different images, we implement AMR-WT/PW on the BSDS500. Fig. 15 shows the comparison of segmentation results using different algorithms, i.e., Sobel-AMR-WT/PW, gPb-AMR-WT/PW, OEF-AMR-WT/PW, and SE-AMR-WT/PW. The segmentation results demonstrate the effectiveness of AMR for the filtering of useless seeds. Moreover, AMR is effective for both WT and PW.

To compare the performance of different algorithms on the BSDS500, Table II shows experimental results of three evaluation metrics: PRI, CV, and VI. We can see that AMR is more efficient for improving segmentation results obtained by WT or PW compared to MR. MR is sensitive to r while AMR is insensitive to s . Although MMG-MR-WT/PW is effective for the over-segmentation reduction by introducing the parameter h , segmentation results are sensitive to both r and h . The gPb-AMR-WT/PW, OEF-AMR-WT/PW, and SE-AMR-WT/PW obtain better performance than Sobel-AMR-WT/PW since the former provides better gradient images. The SE-AMR-WT/PW obtains the best performance. In addition, AMR-WT obtains higher PRI, CV, and lower VI than AMR-PW in the same situation.

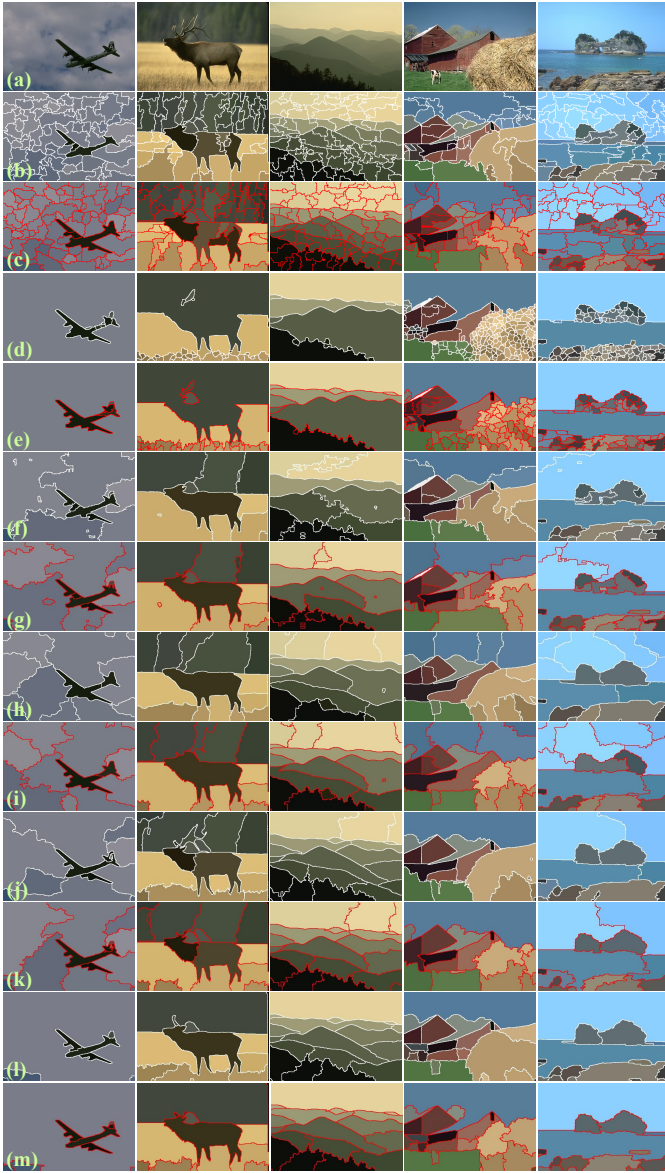


Fig. 15. Comparison of segmentation results using different algorithms ($s = 2$). (a) Images. (b) Sobel-MR-WT ($r = 5$). (c) Sobel-MR-PW ($r = 5$). (d) MMG-MR-WT ($r = 5$ and $h = 0.2$). (e) MMG-MR-PW ($r = 5$ and $h = 0.2$). (f) Sobel-AMR-WT. (g) Sobel-AMR-PW. (h) gPb-AMR-WT. (i) gPb-AMR-PW. (j) OEF-AMR-WT. (k) OEF-AMR-PW. (l) SE-AMR-WT. (m) SE-AMR-PW.

Because AMR converges quickly, AMR has a high computation efficiency for gradient reconstruction. Table III shows the comparison of running time of AMR-WT on different gradient images obtained by Sobel, gPb, OEF, and SE, respectively. We only present the running time of AMR-WT here because AMR-PW has a similar running time as AMR-WT. It can be seen from Table III that AMR-WT has a short running time to achieve image segmentation on the BSDS500. The SE-AMR-WT requires the shortest running time because the corresponding gradient image converges quicker under AMR. Tables II-III show AMR is effective and efficient for improving seeded segmentation algorithms such as WT and PW.

Additional evidence of the superiority of AMR can be found

TABLE II. Quantitative results (PRI, CV, VOI) on the BSDS500. Larger is better for PRI and CV while smaller is better for VI. The best values are in bold.

Methods	PRI↑	CV↑	VI↓
Sobel-MR-WT/PW ($r = 5$)	0.71/0.71	0.16/0.15	4.02/4.12
Sobel-MR-WT/PW ($r = 8$)	0.73/0.73	0.28/0.28	3.08/3.05
Sobel-MR-WT/PW ($r = 12$)	0.69/0.68	0.38/0.39	2.67/2.33
MMG-MR-WT/PW [26] ($h = 0.1$)	0.76/0.76	0.27/0.27	4.47/4.45
MMG-MR-WT/PW [26] ($h = 0.2$)	0.74/0.74	0.38/0.38	3.50/3.45
MMG-MR-WT/PW [26] ($h = 0.3$)	0.62/0.62	0.42/0.42	2.95/2.92
Sobel-AMR-WT/PW ($s = 1$)	0.76/0.75	0.39/0.34	2.54/2.79
Sobel-AMR-WT/PW ($s = 2$)	0.76/0.75	0.39/0.36	2.51/2.70
Sobel-AMR-WT/PW ($s = 3$)	0.76/0.76	0.39/0.36	2.52/2.66
gPb-AMR-WT/PW ($s = 1$)	0.75/0.75	0.35/0.32	2.55/2.77
gPb-AMR-WT/PW ($s = 2$)	0.75/0.74	0.35/0.33	2.55/2.77
gPb-AMR-WT/PW ($s = 3$)	0.75/0.74	0.36/0.33	2.55/2.76
OEF-AMR-WT/PW ($s = 1$)	0.77/0.75	0.39/0.34	2.45/2.72
OEF-AMR-WT/PW ($s = 2$)	0.77/0.75	0.39/0.34	2.43/2.72
OEF-AMR-WT/PW ($s = 3$)	0.77/0.76	0.39/0.35	2.41/2.70
SE-AMR-WT/PW ($s = 1$)	0.80/0.79	0.45/0.41	2.25/2.52
SE-AMR-WT/PW ($s = 2$)	0.80/0.79	0.45/0.41	2.23/2.51
SE-AMR-WT/PW ($s = 3$)	0.80/0.79	0.45/0.41	2.21/2.50

TABLE III. Comparison of average running time of AMR-WT on the BSDS500 (in seconds). Lower is better. The best values are in bold ($\eta = 10^{-4}$).

s	Sobel	gPb	OEF	SE
$s = 1$	0.801	1.278	0.861	0.565
$s = 2$	0.774	1.241	0.825	0.534
$s = 3$	0.689	1.169	0.766	0.480

in Fig. 16 which shows experimental results on images with rich texture and faded boundaries. According to Figs. 15-16, we can see that the proposed AMR is effective for different kinds of images.

B. Seed-based Spectral Segmentation

In this section, we directly construct the affinity matrix on a pre-segmentation image provided by AMR-WT to reduce the size of the affinity matrix, and then compute the subsequent steps of spectral segmentation (we name it AMR-SC). Note that we employ AMR-WT rather than AMR-PW because the former is able to provide better pre-segmentation results than the latter as shown in Table II. As the pre-segmentation image only consists of dozens of regions, we consider color feature in CIELAB color space and Gaussian function as the criterion to measure the similarity of two regions. Throughout the paper, we use $\sigma = 1$. It is clear that the affinity matrix produced by AMR is a small matrix. Therefore, the clusters can be detected easily and fast with the k -means algorithm.

In this paper, the pre-segmentation depends on AMR. According to Table II, we set $s = 2$ and 3, and we set the number of clusters for the k -means according to [39], [55]. The proposed AMR-SC is evaluated on BSDS500 and compared with algorithms such as gPb-owt-ucm, FNCut, GL-graph, SCG and MCG. Figs. 17-18 show that the proposed AMR-SC generates better segmentation results than those comparative algorithms. The result demonstrates that AMR is useful for

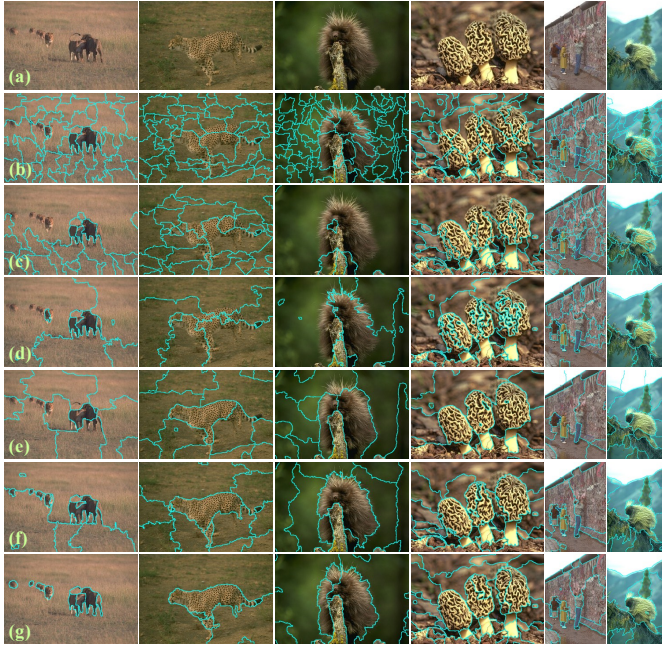


Fig. 16. Comparison of segmentation results using different algorithms ($s = 2$). (a) Images with rich texture or faded boundaries. (b) Sobel-MR-WT ($r = 5$). (c) MMG-MR-WT ($r = 5$ and $h = 0.2$). (d) Sobel-AMR-WT. (e) gPb-AMR-WT. (f) OEF-AMR-WT. (g) SE-AMR-WT.

improving spectral segmentation due to two reasons. The first is that the regional spatial information of an image provided by pre-segmentation is integrated into spectral segmentation, and the second is that the affinity graph is reduced efficiently by removing useless seeds.

Furthermore, we employ the three measures: PRI, CV and VI to compare the proposed AMR-SC with nine state-of-the-art image segmentation algorithms. Table VI shows the region benchmarks on the BSDS500. In Table VI, the proposed AMR-SC clearly dominates other algorithms on PRI and CV, and is on par with SCG on VI mainly due to accurate pre-segmentation provided by AMR-WT. The OEF-AMR-SC and SE-AMR-SC provide better performance than gPb-AMR-SC and Sobel-AMR-SC because OEF and SE obtain better gradient images than gPb and Sobel. In addition, AMR-SC is insensitive to the parameter s .

We tested the running time complexity on the BSDS500 dataset. The running time comparison is shown in Table IV. On average, generating a pre-segmentation result with SE-AMR-WT takes 0.54 seconds (SE generates a gradient image requiring 0.06 seconds. AMR-WT takes 0.48 seconds, $s = 3$ and $\eta = 10^{-4}$), and constructing an affinity graph and spectral clustering take 0.059 seconds. Consequently, SE-AMR-SC takes about 0.60 second to segment an image from the BSDS500. In contrast, the gPb-owt-ucm takes almost 106.38 seconds, FNCut takes about 10.58 seconds. As GL-graph has four steps, i.e., over-segmentation, feature extraction, bipartite graph construction and graph partition using spectral clustering, it is more complex than SE-AMR-SC, and takes almost 7.41 seconds. MCG takes about 18.60s per image to compute the multiscale hierarchy but SCG takes only 2.21s per image.

TABLE IV. Quantitative results (PRI, CV, and VI) on the BSDS500. Larger is better for PRI and CV while smaller is better for VI and running time. The best values are in bold.

Methods	PRI $\uparrow$	CV $\uparrow$	VI $\downarrow$	Time $\downarrow$
MNCut [52]	0.78	0.45	2.23	37.25
gPb-owt-ucm [15]	0.83	0.59	1.69	106.38
gPb-Hoieim [53]	0.81	0.56	1.78	109.77
FNCut [39]	0.81	0.53	1.86	10.58
cPb-owt-ucm [39]	0.83	0.59	1.65	107.13
HO-CC [54]	0.83	0.60	1.79	35.18
GL-graph [55]	0.84	0.59	1.80	7.41
SCG [49]	0.83	0.60	1.63	2.21
MCG [49]	0.83	0.61	1.57	18.60
Sobel-AMR-SC ($s = 2$)	0.82	0.61	1.77	0.86
Sobel-AMR-SC ($s = 3$)	0.82	0.61	1.77	0.81
gPb-AMR-SC ($s = 2$)	0.82	0.61	1.73	102.94
gPb-AMR-SC ($s = 3$)	0.82	0.61	1.73	102.92
OEF-AMR-SC ($s = 2$)	0.85	0.63	1.62	6.16
OEF-AMR-SC ($s = 3$)	0.84	0.63	1.64	6.07
SE-AMR-SC ($s = 2$)	0.85	0.63	1.62	0.62
SE-AMR-SC ($s = 3$)	0.85	0.63	1.62	0.60

TABLE V. The number of iterations of SE-AMR-WT under different values of η , ($s = 3$). The number of iterations m is unchanged when $\eta \leq 10^{-4}$, and the invariant values of m are in bold.

Images	$\eta = 10^{-2}$	$\eta = 10^{-3}$	$\eta = 10^{-4}$	$\eta = 10^{-5}$
"2092"	9	16	16	16
"8023"	6	12	19	19
"8049"	13	16	19	19
"12074"	9	17	17	17
"12084"	9	13	13	13
"15004"	11	21	21	21

It is clear that our SE-AMR-SC is the fastest because AMR-SC only depends on the gradient information, and the generated affinity matrix is small.

C. Discussion

AMR has two parameters, η and s . η relates to the convergent condition. Generally, a large value of η means a few iterations (a small m , where m is the number of iterations) while a small value of η corresponds to many iterations (a large m). Table V shows the influence of η on m for test images. We can see that m increases with the decrease of η but m is unchanged when $\eta \leq 10^{-4}$.

Furthermore, to show the influence of η on AMR, we implement AMR on the BSDS500 by setting different values of η , and Tables VI-VII show the results. It is clear that the number of iterations for AMR-WT is smaller and running time is shorter if the value of η is larger. However, the number of iterations and running time are unchanged when $\eta \leq 10^{-4}$. Therefore, in practical application, users can select different values of η according to their requirements.

Furthermore, we implemented SE-AMR-WT on BSDS500 with different values of η . The performance indices of segmentations are shown in Table VIII. By comparing Tables V-VIII, we can see that the average number of iterations, running time,

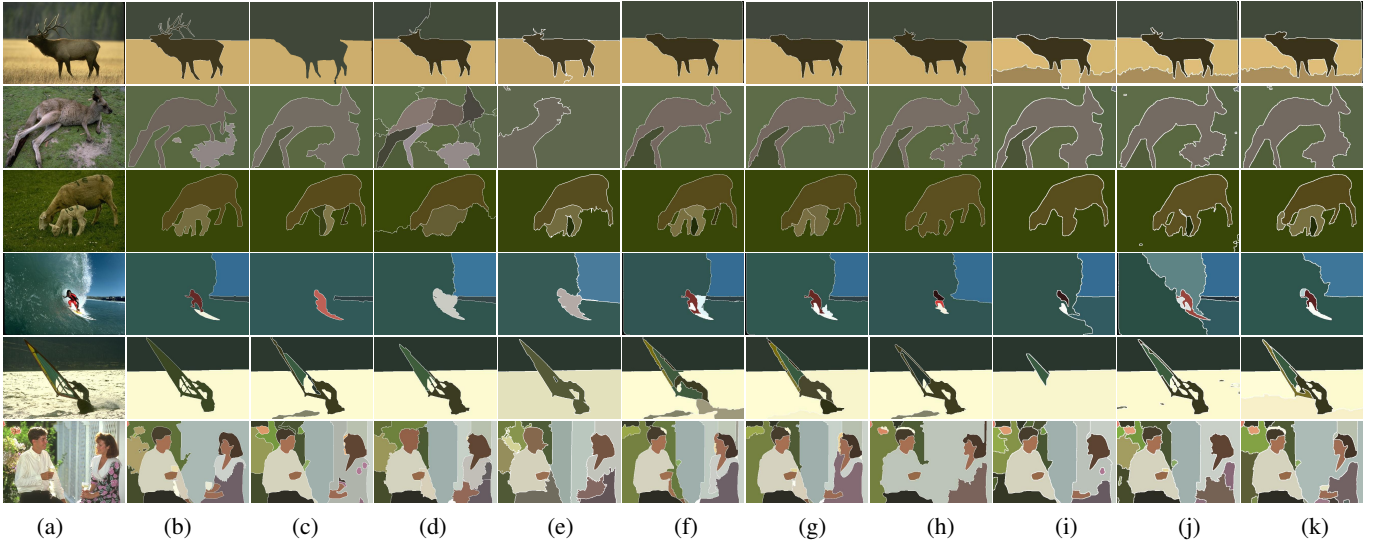


Fig. 17. Comparison of segmentation results on the BSDS500 using different algorithms ($s = 2$). (a) Images. (b) Ground truths. (c) gPb-owt-ucm. (d) FNCut. (e) GL-graph. (f) SCG. (g) MCG. (h) Sobel-AMR-SC. (i) gPb-AMR-SC. (j) OEF-AMR-SC. (k) SE-AMR-SC.

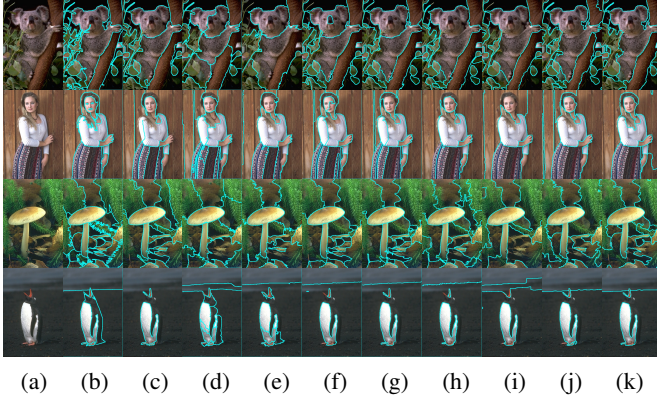


Fig. 18. Comparison of segmentation results on the BSDS500 using different algorithms ($s = 2$). Compared to Figs. 15 and 17, we use an overlay of the segmented result with respect to the original image to show the accuracy of the boundary. (a) Images. (b) Ground truths. (c) gPb-owt-ucm. (d) FNCut. (e) GL-graph. (f) SCG. (g) MCG. (h) Sobel-AMR-SC. (i) gPb-AMR-SC. (j) OEF-AMR-SC. (k) SE-AMR-SC.

and segmentation accuracy are unchanged for AMR-WT when $\eta \leq 10^{-4}$. Therefore, the proposed AMR is insensitive to η .

The value of s controls the initial gradient value of images. A large s will cause the contour offset while a small value of s will cause too many unexpected small regions. Therefore, we choose $s = 2$ and $s = 3$ for the BSDS500 in Table IV. To further show the influence of s on AMR, Table IX shows the performance indices of segmentations on BSDS500 by setting different values of s . It can be seen from Table IX that SE-AMR-WT is insensitive to s if $1 \leq s \leq 6$.

V. CONCLUSION

In this work, we have studied the advantages and disadvantages of MR on seeded segmentation algorithms. We proposed an efficient AMR algorithm that can preferably improve seeded segmentation algorithms. The proposed AMR

TABLE VI. The average number of iterations of SE-AMR-WT under different values of η , $s = 3$. The average number of iterations is unchanged when $\eta \leq 10^{-4}$, and the invariant values of m are in bold.

	$\eta = 10^{-1}$	$\eta = 10^{-2}$	$\eta = 10^{-3}$	$\eta = 10^{-4}$	$\eta = 10^{-5}$
m	2.0	9.3	17.0	18.9	18.9

TABLE VII. The average running time of SE-AMR-WT on the BSDS500 (in seconds), $s = 3$. The average running time is unchanged when $\eta \leq 10^{-4}$, and the invariant values are in bold.

	$\eta = 10^{-1}$	$\eta = 10^{-2}$	$\eta = 10^{-3}$	$\eta = 10^{-4}$	$\eta = 10^{-5}$
Time	0.089	0.228	0.430	0.480	0.480

has two significant properties, i.e., the monotonic increasingness and the convergence. The monotonic increasingness helps AMR to achieve a hierarchical segmentation. The convergence is able to alleviate the drawback of MR by filtering out useless regional minima in a gradient image, and guarantees a convergent result. Moreover, we have explored the applications of AMR and have found that AMR is not only able to improve seeded image segmentation results, but also can obtain better spectral segmentation results than state-of-the-art algorithms. Furthermore, the proposed AMR-SC is computationally efficient because a small affinity matrix is used for spectral clustering. Experimental results clearly demonstrate that the proposed AMR-WT generates satisfactory and convergent segmentation results without hard-tuning parameters, and the AMR-SC outperforms most of the state-of-the-art algorithms for image segmentation, and it performs the best in two metrics: PRI and CV.

The segmentation results generated by AMR-WT or AMR-SC can be directly used in object recognition and scene labeling. However, neither AMR-WT nor AMR-SC can obtain semantic segmentation results compared to the popular convolutional neural network (CNN), e.g., fully convolutional network (FCN) [56]. To further improve the contour quality of

TABLE VIII. Quantitative results (PRI, CV and VI) of SE-AMR-WT on the BSDS500 under different values of η , $s = 3$. Larger value is better for PRI and CV while smaller value is better for VI.

η	PRI $\uparrow$	CV $\uparrow$	VI $\downarrow$
10^{-1}	0.77	0.30	3.21
10^{-2}	0.79	0.39	2.52
10^{-3}	0.80	0.45	2.23
10^{-4}	0.80	0.45	2.21
10^{-5}	0.80	0.45	2.21

TABLE IX. Quantitative results (PRI, CV and VI) of SE-AMR-WT on the BSDS500 under different values of s , $\eta = 10^{-4}$. Larger value is better for PRI and CV while smaller value is better for VI.

s	PRI $\uparrow$	CV $\uparrow$	VI $\downarrow$
1	0.80	0.45	2.25
2	0.80	0.45	2.23
3	0.80	0.46	2.21
4	0.80	0.46	2.22
5	0.80	0.46	2.25
6	0.79	0.46	2.30

segmentation results, traditional algorithms such as conditional random field [57], image superpixel [58], and spatial pyramid pooling [59], are used to improve the performance of CNN on image segmentation. AMR can be also used in CNN to improve semantic segmentation results. For our future work, we plan to investigate how to combine AMR and FCN effectively and efficiently.

APPENDIX A

PROOF OF $\lim_{m \rightarrow \infty} R_g^\gamma(f)_{b_m} = \max(g)$

Proof:

Since

$$f = \delta_{b_m}(g), m \rightarrow \infty, \lim_{m \rightarrow \infty} \delta_{b_m}(g) = \max(g)$$

we have,

$$f = \max(g),$$

and

$$\begin{aligned} \varepsilon_g^{(1)}(f) &= \varepsilon(f) \vee g \\ &= \varepsilon(\max(g)) \vee g \\ &= \max(g), \end{aligned}$$

$$\begin{aligned} \varepsilon_g^{(n)}(f) &= \varepsilon(\varepsilon_g^{(n-1)}(f)) \vee g \\ &= \max(g). \end{aligned}$$

According to $R_g^\gamma(f) = R_g^\delta(R_g^\varepsilon(f))$, $R_g^\varepsilon(f) = \varepsilon_g^n(f)$ in (1), we get

$$R_g^{(\varepsilon)}(f) = \max(g).$$

Thus,

$$\begin{aligned} \lim_{m \rightarrow \infty} R_g^\gamma(f)_{b_m} &= \lim_{m \rightarrow \infty} R_g^\delta(R_g^\varepsilon(f)) \\ &= R_g^\delta(\max(g)) \\ &= \max(g). \end{aligned}$$

In terms of the duality of morphological operation,

$$\lim_{m \rightarrow \infty} R_g^\phi(f)_{b_m} = \min(g).$$

APPENDIX B PROOF OF THEOREM 1

$$p \leq q \Rightarrow \psi(g, s, p) \leq \psi(g, s, q)$$

Proof:

Let $s \leq p \leq q \leq m$, from Definition 1, we have

$$\psi(g, s, p) = \vee \{R_g^\phi(f)_{b_s}, R_g^\phi(f)_{b_{s+1}}, \dots, R_g^\phi(f)_p\},$$

$$\psi(g, s, p) = \vee \{R_g^\phi(f)_{b_s}, R_g^\phi(f)_{b_{s+1}}, \dots, R_g^\phi(f)_q\}.$$

Because $p \leq q$,

$$\psi(g, s, p) = \vee \{\psi(g, s, p), R_g^\phi(f)_{b_{p+1}}, \dots, R_g^\phi(f)_q\},$$

i.e.,

$$\psi(g, s, p) \leq \psi(g, s, q).$$

APPENDIX C PROOF OF THEOREM 2

$$\begin{aligned} \psi(g, s, m) &= \psi(g, s, m + j), \\ \min(\psi(g, s, m)) &\geq \max(R_g^\phi(f)_{b_{m+1}}) \end{aligned}$$

Proof:

From Definition 1, we have

$$\begin{aligned} \lim_{m \rightarrow \infty} \psi(g, s, m) &= \vee_{s \leq i \leq m} \{R_g^\phi(f)_{b_i}\} \\ &= \vee_{s \leq i \leq m} \{R_g^\phi(f)_{b_i}\} \vee \{R_g^\phi(f)_{b_{m+1}}, R_g^\phi(f)_{b_{m+2}}, \dots, R_g^\phi(f)_{b_\infty}\} \\ &= \psi(g, s, m) \vee \{R_g^\phi(f)_{b_{m+1}}, R_g^\phi(f)_{b_{m+2}}, \dots, R_g^\phi(f)_{b_\infty}\} \end{aligned}$$

Since $b_m \subseteq b_{m+1} \subseteq \dots \subseteq b_{m+j}$ and $R_g^\phi(f)_{b_\infty} = \min(g)$ from Appendix A, we get

$$\max(R_g^\phi(f)_{b_{m+1}}) \geq \max(R_g^\phi(f)_{b_{m+2}}) \geq \dots \geq R_g^\phi(f)_{b_\infty}.$$

We have known that $\min(\psi(g, s, m)) \geq \max(R_g^\phi(f)_{b_{m+1}})$, thus

$$\psi(g, s, m) \geq \vee \{R_g^\phi(f)_{b_{m+1}}, R_g^\phi(f)_{b_{m+2}}, \dots, R_g^\phi(f)_{b_\infty}\},$$

i.e.,

$$\psi(g, s, m) = \psi(g, s, m + j), \text{ where } m, j \in \mathbb{N}^+.$$

REFERENCES

- [1] L. Vincent, "Morphological grayscale reconstruction in image analysis: applications and efficient algorithms," *IEEE Trans. Image Process.*, vol. 2, no. 2, pp. 176-201, Apr. 1993.
- [2] J. Shi, Y. Wang, D. Xu, C. Yan, T. Chen, Y. He, L. Tang, M. Nie, P. Duan, D. Yan, H. Feng, and J. Yao, "Terahertz imaging based on morphological reconstruction," *IEEE J. Sel. Topics Quantum Electron.*, vol. 23, no. 4, pp. 1-7, July-Aug. 2017.

- [3] S. Roychowdhury, D. D. Koozekanani, and K. K. Parhi, "Iterative vessel segmentation of fundus images," *IEEE Trans. Biomed. Eng.*, vol. 62, no. 7, pp. 1738-1749, Jul. 2015.
- [4] W. Liao, R. Bellens, A. Pizurica, W. Philips, and Y. Pi, "Classification of hyperspectral data over urban areas using directional morphological profiles and semi-supervised feature extraction," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 5, no. 4, pp. 1177-1190, Aug. 2012.
- [5] Z. Huang, X. Wang, J. Wang, W. Liu, and J. Wang, "Weakly-supervised semantic segmentation network with deep seeded region growing," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2018, pp. 7014-7023.
- [6] W. Casaca, L. G. Nonato, and G. Taubin, "Laplacian coordinates for seeded image segmentation," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2014, pp. 384-391.
- [7] L. Vincent and P. Soille, "Watersheds in digital spaces: an efficient algorithm based on immersion simulations," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 13, no. 6, pp. 583-598, Jun. 1991.
- [8] C. Couprie, L. Grady, L. Najman, and H. Talbot, "Power watershed: A unifying graph-based optimization framework," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 33, no. 7, pp. 1384-1399, Jul. 2011.
- [9] E. O. Rodrigues, L. Torok, P. Liatsis, J. Viterbo, and A. Conci, "K-MS: a novel clustering algorithm based on morphological reconstruction," *Pattern Recognit.*, vol. 66, pp. 392-403, Jun. 2017.
- [10] T. Lei, X. Jia, Y. Zhang, L. He, H. Meng, and A. K. Nandi, "Significantly fast and robust fuzzy c-means clustering algorithm based on morphological reconstruction and membership filtering," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 5, pp. 3027-3041, Oct. 2018.
- [11] T. Lei, Y. Zhang, Y. Wang, S. Liu, and Z. Guo, "A conditionally invariant mathematical morphological framework for color images," *Inf. Sci.*, vol. 387, pp. 34-52, May 2017.
- [12] J. Cheng and J. C. Rajapakse, "Segmentation of clustered nuclei with shape markers and marker function," *IEEE Trans. Biomed. Eng.*, vol. 56, no. 3, pp. 741-748, Mar. 2009.
- [13] B. Peng, L. Zhang, and D. Zhang, "Automatic image segmentation by dynamic region merging," *IEEE Trans. Image Process.*, vol. 20, no. 12, pp. 3592-3605, Dec. 2011.
- [14] M. Bosch, C. M. Gifford, A. G. Dress, C. W. Lau, J. G. Skibo, and G. A. Christie, "Improved image segmentation via cost minimization of multiple hypotheses," arXiv:1802.00088, 2018.
- [15] P. Arbelaez, M. Maire, C. Fowlkes, and J. Malik, "Contour detection and hierarchical image segmentation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 33, no. 5, pp. 898-916, May 2011.
- [16] P. Dollar and C. L. Zitnick, "Fast edge detection using structured forests," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 37, no. 8, pp. 1558-1570, Aug. 2015.
- [17] S. Hallman and C. C. Fowlkes, "Oriented edge forests for boundary detection," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2015, pp. 1732-1740.
- [18] X. Fu, C. Wang, C. Chen, C. Wang, and C. C. Jay Kuo, "Robust image segmentation using contour-guided color palettes," in *Proc. IEEE Conf. Int. Comput. Vis. (ICCV)*, Dec. 2015, pp. 1618-1625.
- [19] D. Comaniciu and P. Meer, "Mean shift: a robust approach toward feature space analysis," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 24, no. 5, pp. 603-619, May 2002.
- [20] A. Y. Ng, M. I. Jordan, and Y. Weiss, "On spectral clustering: Analysis and an algorithm," in *Proc. Adv. Neural Inf. Proc. Syst. (NIPS)*, Dec. 2002, pp. 849-856.
- [21] J. Serra, *Image Analysis and Mathematical Morphology, Part II: Theoretical Advances*. London: Academic Press, 1988.
- [22] M. E. Plissiti, C. Nikou, and A. Charchanti, "Automated detection of cell nuclei in pap smear images using morphological reconstruction and clustering," *IEEE Trans. Inf. Technol. Biomed.*, vol. 15, no. 2, pp. 233-241, Mar. 2011.
- [23] P. Soille and M. Pesaresi, "Advances in mathematical morphology applied to geoscience and remote sensing," *IEEE Trans. Geosci. Remote Sens.*, vol. 40, no. 9, pp. 2042-2055, Sept. 2002.
- [24] W. Liao, M. D. Mura, J. Chanussot, R. Bellens, and W. Philips, "Morphological attribute profiles with partial reconstruction," *IEEE Trans. Geosci. Remote Sens.*, vol. 54, no. 3, pp. 1738-1756, Mar. 2016.
- [25] P. Soille, *Morphological image analysis: principles and applications*. Springer Science & Business Media, 2013.
- [26] D. Wang, "A multiscale gradient algorithm for image segmentation using watersheds," *Pattern Recognit.*, vol. 30, no. 12, pp. 2043-2052, Dec. 1997.
- [27] M. S. Miri and A. Mahloojifar, "Retinal image analysis using curvelet transform and multistructure elements morphology by reconstruction," *IEEE Trans. Biomed. Eng.*, vol. 58, no. 5, pp. 1183-1192, May 2011.
- [28] Y. Li, M. Xu, X. Liang, and W. Huang, "Application of bandwidth EMD and adaptive multiscale morphology analysis for incipient fault diagnosis of rolling bearings," *IEEE Trans. Ind. Electron.*, vol. 64, no. 8, pp. 6506-6517, Aug. 2017.
- [29] Y. Li, M. J. Zuo, J. Lin, and J. Liu, "Fault detection method for railway wheel flat using an adaptive multiscale morphological filter," *Mech. Syst. Signal Process.*, vol. 84, pp. 642-658, Feb. 2017.
- [30] J. Chen, C. Su, W. E. L. Grimson, J. Liu, and D. Shiue, "Object segmentation of database images by dual multiscale morphological reconstructions and retrieval applications," *IEEE Trans. Image Process.*, vol. 21, no. 2, pp. 828-843, Feb. 2012.
- [31] H. Shih and E. Liu, "Automatic reference color selection for adaptive mathematical morphology and application in image segmentation," *IEEE Trans. Image Process.*, vol. 25, no. 10, pp. 4665-4676, Oct. 2016.
- [32] Y. Teng, Y. Zhang, Y. Chen, and C. Ti, "Adaptive morphological filtering method for structural fusion restoration of hyperspectral images," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 9, no. 2, pp. 655-667, Feb. 2016.
- [33] Y. Boykov and G. Funka-Lea, "Graph cuts and efficient nd image segmentation," *Int. J. Comput. Vision*, vol. 70, no. 2, pp. 109-131, Nov. 2006.
- [34] L. Grady, "Random walks for image segmentation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 28, no. 11, pp. 1768-1783, Nov. 2006.
- [35] M. Huang, W. Yang, Y. Wu, J. Jiang, W. Chen, and Q. Feng, "Brain tumor segmentation based on local independent projection-based classification," *IEEE Trans. Biomed. Eng.*, vol. 61, no. 10, pp. 2633-2645, Oct. 2014.
- [36] L. Najman and M. Schmitt, "Geodesic saliency of watershed contours and hierarchical segmentation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 18, no. 12, pp. 1163-1173, Dec. 1996.
- [37] V. Grau, A. U. J. Mewes, M. Alcaniz, R. Kikinis, and S. K. Warfield, "Improved watershed transform for medical image segmentation using prior information," *IEEE Trans. Med. Imag.*, vol. 23, no. 4, pp. 447-458, Apr. 2004.
- [38] A. M. Mendonca and A. Campilho, "Segmentation of retinal blood vessels by combining the detection of centerlines and morphological reconstruction," *IEEE Trans. Med. Imag.*, vol. 25, no. 9, pp. 1200-1213, Sept. 2006.
- [39] T. H. Kim, K. M. Lee, and S. U. Lee, "Learning full pairwise affinities for spectral segmentation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 35, no. 7, pp. 1690-1703, Jul. 2013.
- [40] F. Galasso, M. Keuper, T. Brox, and B. Schiele, "Spectral graph reduction for efficient image and streaming video segmentation," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2014, pp. 49-56.
- [41] C. Yang, L. Bruzzone, H. Zhao, Y. Tan, and R. Guan, "Superpixel-based unsupervised band selection for classification of hyperspectral images," *IEEE Trans. Geosci. Remote Sens.*, vol. 56, no. 12, pp. 7230-7245, Dec. 2018.
- [42] P. Theologou, I. Pratikakis, and T. Theoharis, "Unsupervised spectral mesh segmentation driven by heterogeneous graphs," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 39, no. 2, pp. 397-410, Feb. 2017.
- [43] R. Achanta, A. Shaji, K. Smith, A. Lucchi, P. Fua, and S. Süsstrunk, "SLIC superpixels compared to state-of-the-art superpixel methods," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 34, no. 11, pp. 2274-2282, Nov. 2012.
- [44] J. Chen, Z. Li, and B. Huang, "Linear spectral clustering superpixel," *IEEE Trans. Image Process.*, vol. 26, no. 7, pp. 3317-3330, Jul. 2017.
- [45] X. Wei, Q. Yang, Y. Gong, N. Ahuja, and M. Yang, "Superpixel hierarchy," *IEEE Trans. Image Process.*, vol. 27, no. 10, pp. 4838-4849, Oct. 2018.
- [46] Z. Zhang, F. Xing, H. Wang, Y. Yan, Y. Huang, X. Shi, and L. Yang, "Revisiting graph construction for fast image segmentation," *Pattern Recognit.*, vol. 78, pp. 344-357, Jun. 2018.
- [47] Y. Xu, E. Carlinet, T. Géraud, and L. Najman, "Hierarchical segmentation using tree-based shape spaces," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 39, no. 3, pp. 457-469, Mar. 2017.
- [48] J. Syu, S. Wang, and L. Wang, "Hierarchical image segmentation based on iterative contraction and merging," *IEEE Trans. Image Process.*, vol. 26, no. 5, pp. 2246-2260, May 2017.
- [49] J. Pont-Tuset, P. Arbelaez, J. T. Barron, F. Marques, and J. Malik, "Multiscale combinatorial grouping for image segmentation and object proposal generation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 39, no. 1, pp. 128-140, Jan. 2017.

- [50] Y. Chen, D. Dai, J. Pont-Tuset, and L. V. Gool, "Scale-aware alignment of hierarchical image segmentation," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2016, pp. 364-372.
- [51] F. Zohrizadeh, M. Kheirandishfard, and F. Kamangar, "Image segmentation using sparse subset selection," in *Proc. IEEE Winter Conf. Appl. Comput. Vis. (WACV)*, Mar. 2018, pp. 1470-1479.
- [52] T. Cour, F. Benitez, and J. Shi, "Spectral segmentation with multiscale graph decomposition," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Sept. 2005, pp. 1124-1131.
- [53] D. Hoiem, A. A. Efros, and M. Hebert, "Recovering occlusion boundaries from an image," *Int. J. Comput. Vision*, vol. 91, no. 3, pp. 328-346, Feb. 2011.
- [54] S. Kim, C. D. Yoo, S. Nowozin, and P. Kohli, "Image segmentation using higher-order correlation clustering," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 36, no. 9, pp. 1761-1774, Sept. 2014.
- [55] X. Wang, Y. Tang, S. Masnou, and L. Chen, "A global/local affinity graph for image segmentation," *IEEE Trans. Image Process.*, vol. 24, no. 4, pp. 1399-1411, Apr. 2015.
- [56] J. Long, E. Shelhamer, and T. Darrell, "Fully convolutional networks for semantic segmentation," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2015, pp. 3431-3440.
- [57] S. Zheng, S. Jayasumana, B. Romera-Paredes, V. Vineet, Z. Su, D. Du, C. Huang, and P. H. S. Torr, "Conditional random fields as recurrent neural networks," in *Proc. IEEE Intl. Conf. Comput. Vis. (ICCV)*, Dec. 2015, pp. 1529-1537.
- [58] R. Gade, V. Jampani, M. Kiefel, D. Kappler, and P. V. Gehler, "Superpixel convolutional networks using bilateral inceptions," in *Proc. Eur. Conf. Comput. Vis. (ECCV)*, Oct. 2016, pp. 597-613.
- [59] L. Chen, G. Papandreou, I. Kokkinos, K. Murphy, and A. L. Yuille, "DeepLab: Semantic image segmentation with deep convolutional nets, atrous convolution, and fully connected crfs," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 40, no. 4, pp. 834-848, Apr. 2018.



Tao Lei (M'17) received the Ph.D degree in Information and Communication Engineering from Northwestern Polytechnical University, Xi'an, China, in 2011.

From 2012 to 2014, he was a Postdoctoral Research Fellow with the School of Electronics and Information, Northwestern Polytechnical University, Xi'an, China. From 2015 to 2016, he was a Visiting Scholar with the Quantum Computation and Intelligent Systems group at University of Technology Sydney, Sydney, Australia. He is currently a professor with the School of Electronic Information and Artificial Intelligence, Shaanxi University of Science and Technology. His current research interests include image processing, pattern recognition, and machine learning.



Xiaohong Jia received the M.S. degree in Signal and Information Processing from Lanzhou Jiaotong University, Lanzhou, China, in 2017. He is currently pursuing the Ph.D. degree at the School of Electrical and Control Engineering, Shaanxi University of Science and Technology, Xi'an 710021, China.

His current research interests include image processing and pattern recognition.



Tongliang Liu (M'14) is currently a Lecturer with the School of Computer Science in the Faculty of Engineering, and a core member in the UBTECH Sydney AI Centre, at The University of Sydney. His research interests include statistical learning theory, machine learning, and computer vision. He has authored and co-authored 60+ research papers including IEEE T-PAMI, T-NNLS, T-IP, ICML, CVPR, ECCV, AAAI, IJCAI, and KDD.

He is a recipient of Discovery Early Career Researcher Award (DECRA) from Australian Research Council (ARC) and was shortlisted for the J G Russell Award by Australian Academy of Science (AAS) in 2019.



Shigang Liu received the B.S. and M.S. degrees from Harbin Engineering University, Harbin, China, in 1997 and 2001, respectively. He received his Ph.D. degree from Xidian University of China, in 2005.

From 2009 to 2010, he was a Visiting Scholar with the Department of Computing at The Hong Kong Polytechnic University. From 2015 to 2016, he was a Visiting Scholar with the Quantum Computation and Intelligent System group at University of Technology Sydney, Sydney, Australia. He is currently a

Professor with the School of Computer Science, Shaanxi Normal University. His research interests include pattern recognition and image processing.



Hongying Meng (M'10-SM'17) received his Ph.D. degree in Communication and Electronic Systems from Xi'an Jiaotong University, Xi'an China, in 1998. He is currently a senior lecturer at the Department of Electronic and Computer Engineering, Brunel University London, U.K. He is a Fellow of The Higher Education Academy (HEA) and a member of Engineering Professors Council in UK.

Dr Meng's current research interests include digital signal processing, affective computing and machine learning with over 130 publications in these

areas. Especially, his audio based and video based emotion recognition systems have won the International Audio/Visual Emotion Challenges AVEC2011 and AVEC2013 prizes respectively. He is a senior member of the IEEE and an associate editor for IEEE T-CSVT.



Asoke K. Nandi (F'11) received the degree of Ph.D. in Physics from the University of Cambridge (Trinity College), Cambridge (UK). He held academic positions in several universities, including Oxford (UK), Imperial College London (UK), Strathclyde (UK), and Liverpool (UK) as well as Finland Distinguished Professorship in Jyväskylä (Finland). In 2013 he moved to Brunel University London (UK), to become the Chair and Head of Electronic and Computer Engineering. Professor Nandi is a Distinguished Visiting Professor at Tongji University (China) and an Adjunct Professor at University of Calgary (Canada).

In 1983 Professor Nandi co-discovered the three fundamental particles known as W^+ , W^- and Z^0 (by the UA1 team at CERN), providing the evidence for the unification of the electromagnetic and weak forces, for which the Nobel Committee for Physics in 1984 awarded the prize to his two team leaders for their decisive contributions. His current research interests lie in the areas of signal processing and machine learning, with applications to communications, gene expression data, functional magnetic resonance data, and biomedical data. He has made many fundamental theoretical and algorithmic contributions to many aspects of signal processing and machine learning. He has much expertise in "Big Data", dealing with heterogeneous data, and extracting information from multiple datasets obtained in different laboratories and different times.

He has authored over 590 technical publications, including 240 journal papers as well as five books, entitled Condition Monitoring with Vibrator Signals: Compressive Sampling and Learning Algorithms for Rotating Machines (Wiley, 2019), Automatic Modulation Classification: Principles, Algorithms and Applications (Wiley, 2015), Integrative Cluster Analysis in Bioinformatics (Wiley, 2015), Blind Estimation Using Higher-Order Statistics (Springer, 1999), and Automatic Modulation Recognition of Communications Signals (Springer, 1996). Recently he published in Blood, International Journal of Neural Systems, BMC Bioinformatics, IEEE TWC, NeuroImage, PLOS ONE, Royal Society Interface, Mechanical systems and Signal Processing, and Molecular Cancer. The H-index of his publications is 70 (Google Scholar) and ERDOS number is 2.

Professor Nandi is a Fellow of the Royal Academy of Engineering (UK) as well as a Fellow of seven other institutions, including the IEEE and the IET. Among the many awards he received are the Institute of Electrical and Electronics Engineers (USA) Heinrich Hertz Award in 2012, the Glory of Bengal Award for his outstanding achievements in scientific research in 2010, the Water Arbitration Prize of the Institution of Mechanical Engineers (UK) in 1999, and the Mountbatten Premium, Division Award of the Electronics and Communications Division, of the Institution of Electrical Engineers (UK) in 1998. Professor Nandi is an IEEE EMBS Distinguished Lecturer (2018-19).